








# TECHNICAL DATA TYRES FOR AGRICULTURE



**VREDESTEIN**  
TYRES

|   |  |                |
|---|--|----------------|
|    | <b>GENERAL</b>                         | <b>2-7</b>     |
|   | Contents                               | 2              |
|   | Sizes and pages                        | 4              |
|   | Vredestein Traxion concept             | 6              |
|   | DLG recognition                        | 8              |
|    | <b>TRACTOR TYRES</b>                   | <b>11-101</b>  |
|   | Radial tractor tyre conversion table   | 12             |
|   | <b>DRIVE RADIAL</b>                    |                |
|   | Traxion Optimall                       | 14             |
|   | TraxionXXL                             | 28             |
|   | Traxion 65                             | 40             |
|   | Traxion 70                             | 52             |
|   | Traxion 85                             | 68             |
|   | <b>DRIVE BIAS</b>                      |                |
|   | Faktor-S                               | 86             |
|   | <b>FRONT</b>                           |                |
|   | Multi Rill                             | 92             |
|   | Lug Ring                               | 96             |
|   | Faktor-F                               | 99             |
|    | <b>HARVESTER TYRES</b>                 | <b>103-123</b> |
|   | <b>DRIVE WHEEL</b>                     |                |
|   | Traxion Harvest                        | 104            |
|   | Traxion Optimall                       | 114            |
|   | TraxionXXL                             | 115            |
|   | <b>STEERING WHEEL</b>                  |                |
|   | Traxion Harvest                        | 116            |
|   | Traxion Versa                          | 122            |
|   | TraxionXXL / Traxion 65                | 123            |
|   | <b>AGRI INDUSTRIAL TYRES</b>           | <b>125-141</b> |
|   | <b>SOFT SURFACE</b>                    |                |
|   | Traxion Versa Green                    | 126            |
|   | Traxion Versa                          | 128            |
|   | <b>HARD SURFACE</b>                    |                |
|   | Endurion                               | 134            |
|  | <b>TRAILER AND IMPLEMENT TYRES</b>     | <b>143-207</b> |
|   | Radial implement tyre conversion table | 144            |
|   | <b>RADIAL</b>                          |                |
|   | Endurion Trailer                       | 147            |
|   | Flotation Trac                         | 150            |
|   | Flotation Pro                          | 170            |
|   | <b>BIAS</b>                            |                |
|   | Flotation+                             | 180            |
|   | AW                                     | 192            |
|   | AS                                     | 202            |
|   | V61                                    | 206            |



## SMALL TYRES

209-241

### AGRICULTURAL

|      |     |
|------|-----|
| V50  | 210 |
| V60  | 211 |
| V61  | 211 |
| V64  | 212 |
| V64+ | 212 |
| V67  | 212 |

### LAWN- AND GROUNDCARE

|           |     |
|-----------|-----|
| Greentrax | 220 |
| V71       | 221 |
| V88       | 221 |

### UTILITY

|     |     |
|-----|-----|
| V20 | 226 |
| V25 | 226 |
| V40 | 227 |
| V52 | 227 |
| V76 | 228 |

### FAST TRAILER

|     |     |
|-----|-----|
| V47 | 234 |
| V48 | 234 |
| V49 | 235 |
| V54 | 235 |
| V71 | 236 |
| V90 | 236 |



## TECHNICAL INFORMATION AND TUBES

242-260

|  |     |
|--|-----|
| General texts for the graphs and tables                            | 243 |
| Service description  | 243 |
| Instructions for use of load capacity graphs                       | 244 |
| Tubes  | 246 |
| Valves   | 247 |
| Rim and wheel discs  | 248 |
| Recommendations to extend the life-span                            | 250 |
| Determining gear ratio, rolling circumference and front wheel lead | 252 |
| Fitting instructions   | 255 |
| Weight transfer  | 256 |
| Names  | 256 |
| General remarks  | 260 |
| Symbols and abbreviations  | 260 |

## GENERAL



## TRACTOR TYRES



## HARVESTER TYRES



## AGRI INDUSTRIAL TYRES



## TRAILER AND IMPLEMENT TYRES



## SMALL TYRES



## TECHNICAL INFORMATION AND TUBES





## TRAILER AND IMPLEMENT TYRES

| RADIAL            |                |                   |     |
|-------------------|----------------|-------------------|-----|
| ENDURIUM TRAILER  | FLOTATION TRAC |                   |     |
| 560/60 R 22.5 IMP | 148            | 710/50 R 26.5 IMP | 163 |
| 600/55 R 26.5 IMP | 148            | 750/45 R 26.5 IMP | 164 |
| 650/55 R 26.5 IMP | 149            | 800/45 R 26.5 IMP | 164 |
| 600/60 R 30.5 IMP | 149            | 600/60 R 30.5 IMP | 165 |
| FLOTATION TRAC    |                |                   |     |
| 480/45 R 17 IMP   | 152            | 650/65 R 30.5 IMP | 165 |
| 520/50 R 17 IMP   | 152, 153       | 710/50 R 30.5 IMP | 166 |
| 500/45 R 22.5 IMP | 153            | 750/60 R 30.5 IMP | 166 |
| 520/55 R 22.5 IMP | 154            | 800/45 R 30.5 IMP | 167 |
| 560/45 R 22.5 IMP | 155            | 850/50 R 30.5 IMP | 167 |
| 560/60 R 22.5 IMP | 156            | 800/60 R 32 IMP   | 168 |
| 580/65 R 22.5 IMP | 157            | 900/65 R 32 IMP   | 168 |
| 600/50 R 22.5 IMP | 157            | 900/65 R 38 IMP   | 169 |
| FLOTATION PRO     |                |                   |     |
| 650/40 R 22.5 IMP | 158            | 560/45 R 22.5 IMP | 172 |
| 680/50 R 22.5 IMP | 159            | 560/60 R 22.5 IMP | 173 |
| 710/40 R 22.5 IMP | 160            | 620/40 R 22.5 IMP | 174 |
| 710/45 R 22.5 IMP | 160            | 620/50 R 22.5 IMP | 175 |
| 800/40 R 22.5 IMP | 161            | 650/50 R 22.5 IMP | 176 |
| 710/65 R 26 IMP   | 161            | 710/40 R 22.5 IMP | 177 |
| 600/55 R 26.5 IMP | 162            | 620/55 R 26.5 IMP | 177 |
| 650/55 R 26.5 IMP | 162            | 710/50 R 26.5 IMP | 178 |
| 650/65 R 26.5 IMP | 163            | 800/45 R 26.5 IMP | 178 |

| BIAS              |          |                     |     |
|-------------------|----------|---------------------|-----|
| FLOTATION+        | AW       |                     |     |
| 260/70 - 15.3 IMP | 182, 183 | 7.00 - 12 IMP       | 194 |
| 300/80 - 15.3 IMP | 183, 184 | 10.0/80 - 12 IMP    | 194 |
| 400/60 - 15.5 IMP | 185      | 10.0/75 - 15.3 IMP  | 195 |
| 340/55 - 16 IMP   | 185      | 11.5/80 - 15.3 IMP  | 196 |
| 380/55 - 17 IMP   | 186      | 12.5/80 - 15.3 IMP  | 197 |
| 480/45 - 17 IMP   | 187      | 13.0/75 - 16 IMP    | 197 |
| 500/50 - 17 IMP   | 188      | 13,5/75 - 430.9 IMP | 198 |
| 400/70 - 20 IMP   | 189      | 15.0/55 - 17 IMP    | 198 |
| 460/65 - 20 IMP   | 189      | 19.0/45 - 17 IMP    | 199 |
| 500/55 - 20 IMP   | 190      | 500/50 - 17 IMP     | 199 |
| 560/60 - 22.5 IMP | 190      | 12.5/80 - 18 IMP    | 200 |
| 600/55 - 22.5 IMP | 191      | 15.0/70 - 18 IMP    | 200 |
| 710/45 - 22.5 IMP | 191      | AS+                 |     |
|                   |          | 7.00 - 12 IMP       | 204 |
|                   |          | 10.0/75 - 15.3 IMP  | 204 |
|                   |          | 11.5/80 - 15.3 IMP  | 205 |
|                   |          | 15.0/55 - 17 IMP    | 205 |
| V61               |          |                     |     |
|                   |          | 200/60 - 14.5 IMP   | 207 |
|                   |          | 250/65 - 14.5 IMP   | 207 |

## AGRI INDUSTRIAL TYRES

| SOFT SURFACE<br>TRAXION VERSA GREEN |     | HARD SURFACE<br>ENDURIUM |     |
|-------------------------------------|-----|--------------------------|-----|
| 440/50 R 17 IMP                     | 127 | 340/80 R 18 IND          | 136 |
| TRAXION VERSA                       |     | 400/70 R 18 IND          | 136 |
| 340/80 R 18 IND                     | 130 | 340/80 R 20 IND          | 137 |
| 400/70 R 20 IND                     | 130 | 400/70 R 20 IND          | 137 |
| 400/70 R 24 IND                     | 131 | 400/70 R 24 IND          | 138 |
| 400/80 R 24 IND                     | 131 | 400/80 R 24 IND          | 138 |
| 460/70 R 24 IND                     | 132 | 460/70 R 24 IND          | 139 |
| 500/70 R 24 IND                     | 132 | 500/70 R 24 IND          | 139 |
| 480/80 R 26 IND                     | 133 | 480/80 R 26 IND          | 140 |
| 440/80 R 28 IND                     | 133 | 440/80 R 28 IND          | 140 |

## SMALL TYRES

| AGRICULTURAL                                      |               | UTILITY   |               |
|---|---------------|---|---------------|
| V50, V60, V61<br>V64, V64+, V67                   |               | V20, V25, V40<br>V52, V76                         |               |
| 3.00 - 4  | 214, 217      | 200 x 50  | 230           |
| 4.00 - 4  | 214, 217      | 260 x 85  | 230, 232      |
| 3.50 - 6  | 214, 216, 218 | 4.10/3.50 - 4                                     | 232, 233      |
| 15x6.00 - 6                                       | 215           | 4.00 - 4  | 230, 232, 233 |
| 160/65 - 6  | 216           | 3.50 - 6  | 230           |
| 3.50 - 8  | 215, 216, 218 | 4.10/3.50 - 6                                     | 233           |
| 4.00 - 8  | 215, 218      | 2.25 - 8  | 230           |
| 5.00 - 8  | 214           | 4.00 - 8  | 230, 231      |
| 170/60 - 8  | 215, 217      | 4.80/4.00 - 8                                     | 233           |
| 18x8.50 - 8                                       | 215, 216      | 5.00 - 8  | 231           |
| 210/60 - 8  | 217           | 6.00 - 9  | 231, 232      |
| 6.00 - 9  | 214           |   |               |
| 4.00 - 12   | 218           |   |               |
| LAWN- AND<br>GROUNDSCAPE<br>GREENTRAX<br>V71, V88 |               | FAST<br>TRAILER<br>V47, V48, V49<br>V54, V71, V90 |               |
| 160/65 - 6  | 223           | 3.50 - 8  | 237           |
| 170/60 - 8  | 223, 225      | 4.00 - 8  | 238, 240, 241 |
| 18x8.50 - 8                                       | 225           | 4.80 - 8  | 239           |
| 210/60 - 8  | 223           | 5.00 - 8  | 238, 240      |
| 250/50 - 8  | 223           | 5.70 - 8  | 240           |
| 250/60 - 8  | 223           | 16.5x6.5 - 8                                      | 241           |
| 210/60 - 10                                       | 224           | 18.5x8.5 - 8                                      | 239           |
| 250/50 - 10                                       | 224           | 6.00 - 9  | 241           |
| 270/50 - 12                                       | 224           | 5.00 - 10   | 238, 239      |
| 320/45 - 12                                       | 224           | 18x8.0 - 10                                       | 239           |
| 320/55 - 12                                       | 224           | 20.5x8.0 - 10                                     | 239           |

**VREDESTEIN TRAXION CONCEPT**

**HIGHEST TRACTION  
MAXIMUM COMFORT -  
LONGEST LIFE —**



## BENEFITS TRACTION ZONE

Transverse lugs and open space between lugs leading to:

- maximum traction (\*DLC test 2017)
- less fuel consumption during traction activities (\*DLC test 2017)



**TRAXION**

**VREDESTEIN**  
TYRES

## NON-PARALLEL LUGS

Unique non-parallel lugs, with increasing gap from the centre to the shoulder, to easily push out the soil. This enhanced self-cleaning ensures the tyre keeps the traction, which leads to optimum productivity.

## MORE RUBBER IN THE CENTRE

30% more lug area in the centre for continuous road contact leading to a smooth ride and extremely high wear resistance (\*DLC test 2019).

## TRANSVERSE LUGS

12% more open space between lugs and an 48% more transverse lug in the shoulder to generate maximum pulling force for uncompromised traction.

## BENEFITS COMFORT ZONE

Rubber in driving direction for continuous road contact leading to:

- excellent driving comfort
- extremely high wear resistance that leads to the long tyre life (\*DLC test 2019)
- side grip for stable driving behaviour on slopes

Vredestein traxion profile



Competition profile





# DLG RECOGNITION


Proven performance by DLG

The Vredestein Traxion Optimall was extensively tested by the renowned German institute DLG and awarded with the highly respected designation 'DLG approved'.

## 2017 | Traxion Optimall | More traction and a low contact pressure


The VF tyre was tested and compared with IF and VF tyres from other leading European manufacturers. The test was carried out using two tractors with over 400 hp and the test criteria focused primarily on field performance, including factors such as fuel consumption, productivity and traction. The test showed that the Vredestein Traxion Optimall tyres performed significantly better than competitor tyres:

### FUEL CONSUMPTION




- Traxion Optimall
- VF Premium European Competitor
- IF Premium European Competitor

### PRODUCTIVITY




<sup>1</sup> Based on tests conducted by the independent institute DLG in Bernburg, Germany.  
<sup>2</sup> Assuming fuel costs are € 1,25/l and man hour costs are € 50,00/hr.

### OPERATING COSTS<sup>2</sup>




## LARGE FOOTPRINT, LOW CONTACT PRESSURE

VF Premium European competitor



IF Premium European competitor



Vredestein Traxion Optimall



|                          |                         |                         |                         |        |        |
|--------------------------|-------------------------|-------------------------|-------------------------|--------|--------|
| Minimum tyre pressure    | 0.85 bar                | 1.05 bar                | 0.65 bar                | (-25%) | (-40%) |
| Footprint surface        | 4740 cm <sup>2</sup>    | 4260 cm <sup>2</sup>    | 5440 cm <sup>2</sup>    | (+15%) | (+25%) |
| Average contact pressure | 1.12 kg/cm <sup>2</sup> | 1.24 kg/cm <sup>2</sup> | 0.97 kg/cm <sup>2</sup> | (-13%) | (-22%) |

Tests conducted in Vredestein test centre in Enschede, NL. Tyres tested 710/75 R 42 with 5.300 kg load and tyre pressure adjusted for max. 10 km/h field work. All measurement are simulating footprint and pressure in the field.



## About DLG


The DLG (Deutsche Landwirtschafts Gesellschaft) Test Centre in Groß Umstadt, near Frankfurt, is the benchmark for certified agricultural technology and equipment, and is a leader in testing and certification in agriculture (as well as food products). Using modern measuring technologies and testing methods that closely resemble the situation in the field, DLG engineers test new products on a daily basis. The measurements are based on international standards as well as testing methods based on practical requirements developed by DLG.

## 2019 | Traxion XXL | Longer service life and save €1 per hour of operation

In this test, the Vredestein Traxion XXL was compared to similar tyres from another manufacturer of premium tyres. The tyre sizes tested were the 600/70 R28 on the front axle and the 710/70 R42 on the rear axle, across six identical John Deere 6215R tractors. The Vredestein tyres demonstrated a longer service life and a lower cost per operating hour.


### DETERMINED LIFETIME IN COMPARISON

When the costs for a tyre set are entered, it is possible to show the economic effect. The price for a tyre set depends on the dealer and his trading terms. In this case we determined a price of € 11,000 for an average on both test candidates.

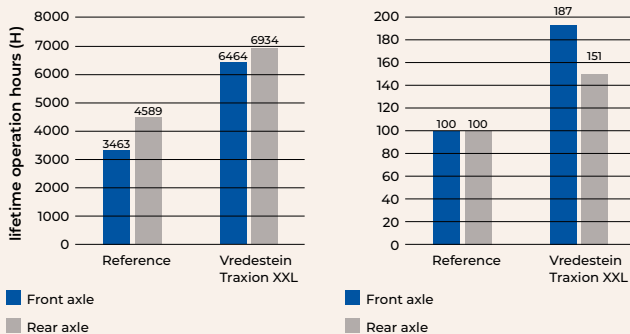

### COMPARISON OF COSTS WITH A PURCHASE PRICE OF € 11,000

|   | Vredestein Traxion XXL |      | Reference |      |
|---|------------------------|------|-----------|------|
|   | FA                     | RA   | FA        | RA   |
| Purchase price per axle (€)             | 3500                   | 7500 | 3500      | 7500 |
| Costs per tyre per operation hour (€/h) | 0,27                   | 0,54 | 0,51      | 0,82 |
| Costs per axle per operation hour (€/h) | 0,54                   | 1,08 | 1,01      | 1,63 |



# MORE TRACTION — ALWAYS

## TRAXION OPTIMALL



**VREDESTEIN TRAXION OPTIMALL**  
✓ Specific fuel consumption  
✓ Area treated per hour  
✓ Kappa/slip ratio  
DLG Test Report 6800

# VREDESTEIN

TYRES



# TRACTOR TYRES

|                                      | Pag. |
|--------------------------------------|------|
| Radial tractor tyre conversion table | 12   |
| <b>DRIVE RADIAL</b>                  |      |
| Traxion Optimall                     | 14   |
| TraxionXXL                           | 28   |
| Traxion 65                           | 40   |
| Traxion 70                           | 52   |
| Traxion 85                           | 69   |
| <b>DRIVE BIAS</b>                    |      |
| Faktor-S                             | 86   |
| <b>FRONT</b>                         |      |
| Multi Rill                           | 92   |
| Lug Ring                             | 96   |
| Faktor-F                             | 99   |



# RADIAL TRACTOR TYRE CONVERSION TABLE

| Overall diameter range (mm) | SRI  | Standard Traxion 85 / Traxion 85 II |             | Low profile Traxion + |             | Extra wide TraxionXXL Traxion Harvest | Extra wide VF Traxion Optimal |
|-----------------------------|------|-------------------------------------|-------------|-----------------------|-------------|---------------------------------------|-------------------------------|
|                             |      | Imperial                            | 85-series   | 70-series             | 65-series   | XL-series                             | XL-series VF                  |
| 735                         | 350  |                                     |             | 240/70 R 16           |             |                                       |                               |
| 765                         | 370  |                                     |             | 260/70 R 16           |             |                                       |                               |
| 800                         | 380  | 7.50 R 16                           | 210/95 R 16 |                       |             |                                       |                               |
| 820                         | 390  |                                     |             | 280/70 R 16           | 320/65 R 16 |                                       |                               |
| 855                         | 410  | 7.50 R 18                           | 210/95 R 18 | 280/70 R 18           |             |                                       |                               |
| 875                         | 425  |                                     |             | 260/70 R 20           | 320/65 R 18 |                                       |                               |
| 905                         | 425  |                                     |             |                       | 340/65 R 18 |                                       |                               |
|                             | 450  |                                     |             | 280/70 R 20           |             |                                       |                               |
| 945                         | 450  |                                     |             | 300/70 R 20           |             |                                       |                               |
| 985                         | 475  | 11.2 R 20                           | 280/85 R 20 | 320/70 R 20           |             |                                       |                               |
| 1050                        | 500  | 12.4 R 20                           | 320/85 R 20 | 360/70 R 20           | 420/65 R 20 |                                       |                               |
| 1090                        | 525  |                                     |             | 380/70 R 20           |             |                                       |                               |
|                             |      | 11.2 R 24                           | 280/85 R 24 | 320/70 R 24           |             |                                       |                               |
| 1145                        | 550  | 12.4 R 24                           | 320/85 R 24 | 360/70 R 24           |             |                                       |                               |
| 1190                        | 575  | 11.2 R 28                           | 280/85 R 28 |                       |             |                                       |                               |
|                             |      | 13.6 R 24                           | 340/85 R 24 | 380/70 R 24           | 440/65 R 24 |                                       |                               |
|                             |      | 12.4 R 28                           | 320/85 R 28 |                       |             |                                       |                               |
| 1245                        | 600  | 14.9 R 24                           | 380/85 R 24 | 420/70 R 24           | 480/65 R 24 |                                       |                               |
|                             |      | 13.6 R 28                           | 340/85 R 28 | 380/70 R 28           | 440/65 R 28 |                                       |                               |
| 1295                        | 625  | 16.9 R 24                           | 420/85 R 24 | 480/70 R 24           | 540/65 R 24 |                                       |                               |
| 1320                        | 625  | 16.9 R 24                           | 420/85 R 24 | 480/70 R 24           | 540/65 R 24 |                                       |                               |
| 1350                        | 650  | 14.9 R 28                           | 380/85 R 28 | 420/70 R 28           | 480/65 R 28 |                                       |                               |
| 1420                        | 675  | 16.9 R 28                           | 420/85 R 28 | 480/70 R 28           | 540/65 R 28 |                                       | VF 600/60 R 28                |
|                             |      | 14.9 R 30                           | 380/85 R 30 |                       |             |                                       |                               |
|                             |      | 16.9 R 30                           | 420/85 R 30 | 480/70 R 30           | 540/65 R 30 | 540/75 R 28                           | VF 600/65 R 28                |
| 1475                        | 700  |                                     |             |                       |             | 600/65 R 28                           | VF 540/65 R 30                |
|                             |      |                                     |             |                       |             |                                       | VF 600/60 R 30                |
|                             |      |                                     |             |                       |             |                                       |                               |
| 1525                        | 725  | 18.4 R 30                           | 460/85 R 30 |                       |             | 600/70 R 28                           |                               |
|                             |      | 14.9 R 34                           | 380/85 R 34 |                       |             |                                       |                               |
| 1550                        | 750  | 13.6 R 38                           | 340/85 R 38 |                       |             |                                       |                               |
|                             |      | 16.9 R 34                           | 420/85 R 34 | 480/70 R 34           | 540/65 R 34 | 620/75 R 26                           |                               |
| 1575                        | 750  | 13.6 R 38                           | 380/80 R 38 |                       |             | 600/70 R 30                           | VF 600/70 R 30                |
|                             |      |                                     |             |                       |             | 710/60 R 30                           |                               |
| 1645                        | 775  | 18.4 R 34                           | 460/85 R 34 | 520/70 R 34           | 600/65 R 34 |                                       | VF 650/60 R 34                |
| 1675                        | 800  | 16.9 R 38                           | 420/85 R 38 | 480/70 R 38           | 540/65 R 38 | 600/70 R 34                           | VF 620/75 R 30                |
|                             |      |                                     |             |                       |             |                                       | VF 600/70 R 34                |
| 1750                        | 825  | 18.4 R 38                           | 460/85 R 38 | 520/70 R 38           | 600/65 R 38 |                                       | VF 650/65 R 34                |
|                             |      |                                     |             |                       |             |                                       | VF 710/60 R 34                |
| 1800                        | 850  |                                     |             |                       |             | 650/75 R 32                           |                               |
| 1835                        | 875  | 20.8 R 38                           | 520/85 R 38 | 580/70 R 38           | 650/65 R 38 | 800/65 R 32                           | VF 710/60 R 38                |
|                             |      | 18.4 R 42                           | 480/80 R 42 |                       |             |                                       |                               |
| 1900                        | 900  |                                     |             |                       |             | 800/70 R 32                           |                               |
|                             |      |                                     |             |                       |             | 900/60 R 32                           |                               |
| 1935                        | 925  | 20.8 R 42                           | 520/85 R 42 | 620/70 R 42           | 650/65 R 42 | 680/85 R 32                           | VF 710/70 R 38                |
|                             |      |                                     | 480/80 R 46 |                       |             | 650/75 R 38                           | VF 650/65 R 42                |
|                             |      |                                     |             |                       |             | 710/70 R 38                           | VF 710/60 R 42                |
| 2000                        | 950  |                                     |             |                       |             | 710/75 R 38                           |                               |
| 2050                        | 975  | 20.8 R 46                           | 520/85 R 46 |                       |             | 650/85 R 38                           | VF 650/85 R 38                |
|                             |      |                                     | 480/80 R 50 |                       |             | 800/70 R 38                           | VF 800/70 R 38                |
|                             |      |                                     |             |                       |             | 900/60 R 38                           | VF 710/70 R 42                |
|                             |      |                                     |             |                       |             | 710/70 R 42                           |                               |
| 2150                        | 1000 |                                     |             |                       |             | 710/75 R 42                           | VF 710/75 R 42                |
| 2150                        | 1025 |                                     |             |                       |             |                                       | VF 650/85 R 42                |
|                             |      |                                     |             |                       |             |                                       | VF 800/70 R 42                |
|                             |      |                                     |             |                       |             |                                       | VF 900/60 R 42                |

This table provides a full overview of tyres for Tractors, Harvesters and Agri-industrial vehicles that are comparable in terms of external Overall diameter but have different widths.

The classification of the tyres into Overall diameter ranges is indicative and complies with ETRTO guidelines. When changing tyres, we advise you to check the exact Overall diameter and rolling circumference. This information is provided in the technical data for each tyre. We advise you to recalculate the front wheel lead each time the tyre is changed.

The Traxion+ tyres in the “low profile” category are wider tyres with the same rim Overall diameter as the standard Traxion 85. The large volume TraxionXXL tyres have a similar external Overall diameter in combination with a smaller rim Overall diameter, which significantly increases the load capacity of the tyres. We recommend that you check the permitted rim width in the technical data for each tyre.



# TRACTOR TYRES – DRIVE RADIAL



## TRAXION OPTIMALL

THE NEXT GENERATION VF TYRE

### FEATURES

Innovative carcass construction enabling up to 25% lower inflation pressure in the field

Traxion concept with unique tread compound and high rubber content for 30% better wear resistance

10% higher radial stiffness\*\*

### BENEFITS

7%\* higher productivity and 7%\* lower fuel consumption  
15%\*\* larger footprint for less soil compaction and higher yield

30% longer life\*\*\*

Maximum stability at heavy road transport






\* According to tests conducted by DLG, compared to premium European IF competitor tyre.

\*\* According to measurements by Vredestein testing dept, compared to premium European VF competitor tyre.

\*\*\* According to Vredestein R&D compared to premium European IF and VF competitor tyres.



# TRAXION OPTIMALL

| Ø  | Tyre size          | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |   |
|----|--------------------|---------------------|----------------------------------|---|--|--|--|--|------|---|
| 28 | VF 600/60 R 28 NRO | 160 D               | 2,0                              | DW20B   | 605*   | 1420*  | 605*   | 4205*  | 16   | N |
|    | VF 600/65 R 28 NRO | 163 D               | 2,0                              | DW20B   | 615*   | 1490*  | 645*   | 4410*  | 16   | N |
| 30 | VF 540/65 R 30 NRO | 158 D               | 2,0                              | DW18L   | 545  | 1480   | 650  | 4360   | 17   | N |
|    | VF 600/60 R 30 NRO | 162 D               | 2,0                              | DW20B   | 600  | 1480   | 655  | 4390   | 17   | N |
|    | VF 600/70 R 30 NRO | 168 D               | 2,0                              | DW21B   | 620  | 1590   | 695  | 4675   | 18   |   |
|    | VF 620/75 R 30     | 172 D               | 2,0                              | DW23B   | 665  | 1665   | 725  | 4920   | 18   |   |
| 34 | VF 600/70 R 34 NRO | 170 D               | 2,0                              | DW21B   | 605  | 1695   | 735  | 5015   | 19   |   |
|    | VF 650/60 R 34 NRO | 168 D               | 2,0                              | DW23B   | 670  | 1660   | 750  | 4935   | 19   |   |
|    | VF 650/65 R 34 NRO | 170 D               | 2,0                              | DW23B   | 655  | 1715   | 775  | 5100   | 20   |   |
|    | VF 710/60 R 34 NRO | 173 D               | 2,0                              | DW25B   | 705  | 1705   | 780  | 5080   | 20   |   |
| 38 | VF 650/85 R 38     | 182 D               | 2,0                              | DW23B   | 680  | 2065   | 885  | 6070   | 21   |   |
|    | VF 710/60 R 38 NRO | 174 D               | 2,0                              | DW25B   | 720*   | 1840*  | 810*   | 5450*  | 21   | N |
|    | VF 710/70 R 38 NRO | 181 D               | 2,0                              | DW25B   | 730*   | 1945*  | 840*   | 5760*  | 22   | N |
|    | VF 800/70 R 38     | 187 D               | 2,0                              | DW27B   | 805  | 2060   | 900  | 6100   | 22   |   |
| 42 | VF 650/65 R 42 NRO | 174 D               | 2,0                              | DW23B   | 665  | 1925   | 845  | 5690   | 23   | N |
|    | VF 650/85 R 42     | 183 D               | 2,0                              | DW23B   | 665  | 2165   | 935  | 6380   | 23   |   |
|    | VF 710/60 R 42     | 176 D               | 2,0                              | DW25B   | 730  | 1925   | 850  | 5710   | 24   | N |
|    | VF 710/70 R 42     | 182 D               | 2,0                              | DW25B   | 730  | 2060   | 910  | 6110   | 24   |   |
|    | VF 710/75 R 42     | 184 D               | 2,0                              | DW25B   | 730  | 2160   | 965  | 6390   | 25   |   |
|    | VF 800/70 R 42     | 189 D               | 2,0                              | DW27B   | 800  | 2165   | 930  | 6380   | 25   |   |
|    | VF 900/60 R 42 NRO | 189 D               | 2,0                              | DW30B   | 875  | 2145   | 920  | 6315   | 26   |   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

# TRACTOR TYRES DRIVE RADIAL

## VF 600/60 R 28 NRO 160 D TL Traxion Optimall

|                       |     |                            |      |      |      |                        |      |          |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|----------|------|------|------|
| EAN                   |     | 8714692805622              |      |      |      | Section width          |      | 605* mm  |      |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1420* mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 605* mm  |      |      |      |
| Recommended rim width |     | DW20L                      |      |      |      | Rolling circumference  |      | 4205* mm |      |      |      |
| Permitted rim width   |     | DW21B,<br>DW18L(NRO)       |      |      |      | SRI                    |      | 675      |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 48 mm    |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 388 l    |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |          |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80     | 2,00 | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |          |      |      |      |
| Speed (km/h)          | 10L | 2570                       | 2965 | 3340 | 3735 | 4135                   | 4670 | 4905     | 5275 | 5480 | 5625 |
|                       | 10H | 2420                       | 2825 | 3230 | 3630 | 4035                   | 4455 | 4695     | 4860 |      |      |
|                       | 25  | 2445                       | 2850 | 3255 | 3665 | 4070                   | 4495 | 4740     | 4905 |      |      |
|                       | 30  | 2420                       | 2825 | 3230 | 3630 | 4035                   | 4455 | 4695     | 4860 |      |      |
|                       | 40  | 2355                       | 2745 | 3140 | 3530 | 3920                   | 4330 | 4565     | 4725 |      |      |
|                       | 50  | 2310                       | 2695 | 3080 | 3465 | 3850                   | 4250 | 4475     | 4635 |      |      |
|                       | 65  | 2240                       | 2615 | 2990 | 3360 | 3735                   | 4125 | 4345     | 4500 |      |      |
|                       | 70  | 2040                       | 2380 | 2720 | 3060 | 3400                   | 3755 | 3955     | 4095 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

## VF 600/65 R 28 NRO 163 D TL Traxion Optimall

|                       |     |                            |      |      |      |                        |      |          |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|----------|------|------|------|
| EAN                   |     | 8714692805639              |      |      |      | Section width          |      | 615* mm  |      |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1490* mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 645* mm  |      |      |      |
| Recommended rim width |     | DW20L                      |      |      |      | Rolling circumference  |      | 4410* mm |      |      |      |
| Permitted rim width   |     | DW21B,<br>DW18L(NRO)       |      |      |      | SRI                    |      | 700      |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 50 mm    |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 441 l    |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |          |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80     | 2,00 | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |          |      |      |      |
| Speed (km/h)          | 10L | 2845                       | 3280 | 3695 | 4135 | 4575                   | 4990 | 5430     | 5670 | 5885 | 6095 |
|                       | 10H | 2680                       | 3125 | 3575 | 4020 | 4465                   | 4725 | 5045     | 5265 |      |      |
|                       | 25  | 2705                       | 3155 | 3605 | 4055 | 4505                   | 4770 | 5090     | 5315 |      |      |
|                       | 30  | 2680                       | 3125 | 3575 | 4020 | 4465                   | 4725 | 5045     | 5265 |      |      |
|                       | 40  | 2605                       | 3040 | 3475 | 3910 | 4340                   | 4595 | 4905     | 5120 |      |      |
|                       | 50  | 2555                       | 2980 | 3405 | 3835 | 4260                   | 4505 | 4810     | 5020 |      |      |
|                       | 65  | 2480                       | 2895 | 3310 | 3720 | 4135                   | 4375 | 4670     | 4875 |      |      |
|                       | 70  | 2260                       | 2635 | 3010 | 3385 | 3765                   | 3980 | 4250     | 4435 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values



# TRACTOR TYRES DRIVE RADIAL

## VF 540/65 R 30 NRO 158 D TL Traxion Optimal

|                       |     |                            |      |      |      |      |                        |      |         |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|
| EAN                   |     | 8714692362255              |      |      |      |      | Section width          |      | 545 mm  |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 1480 mm |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 650 mm  |      |      |
| Recommended rim width |     | DW18L                      |      |      |      |      | Rolling circumference  |      | 4360 mm |      |      |
| Permitted rim width   |     | W18L,<br>DW16L (NRO)       |      |      |      |      | SRI                    |      | 700     |      |      |
|                       |     |                            |      |      |      |      | Tread depth            |      | 47 mm   |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 363 l   |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |
| Speed (km/h)          | 10L | 2490                       | 2875 | 3235 | 3620 | 4005 | 4365                   | 4750 | 4960    | 5150 | 5315 |
|                       | 10H | 2345                       | 2735 | 3125 | 3520 | 3910 | 4185                   | 4415 | 4590    |      |      |
|                       | 25  | 2365                       | 2760 | 3155 | 3550 | 3945 | 4225                   | 4455 | 4635    |      |      |
|                       | 30  | 2345                       | 2735 | 3125 | 3520 | 3910 | 4185                   | 4415 | 4590    |      |      |
|                       | 40  | 2280                       | 2660 | 3040 | 3420 | 3800 | 4070                   | 4290 | 4465    |      |      |
|                       | 50  | 2235                       | 2610 | 2980 | 3355 | 3730 | 3990                   | 4210 | 4380    |      |      |
|                       | 65  | 2170                       | 2535 | 2895 | 3255 | 3620 | 3875                   | 4085 | 4250    |      |      |
|                       | 70  | 1975                       | 2305 | 2635 | 2965 | 3295 | 3525                   | 3720 | 3870    |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 600/60 R 30 NRO 162 D TL Traxion Optimal

|                       |     |                            |      |      |      |      |                        |      |         |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|
| EAN                   |     | 8714692362262              |      |      |      |      | Section width          |      | 600 mm  |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 1480 mm |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 655 mm  |      |      |
| Recommended rim width |     | DW20B                      |      |      |      |      | Rolling circumference  |      | 4390 mm |      |      |
| Permitted rim width   |     | DW21B,<br>DW18L (NRO)      |      |      |      |      | SRI                    |      | 700     |      |      |
|                       |     |                            |      |      |      |      | Tread depth            |      | 48 mm   |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 411 l   |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |
| Speed (km/h)          | 10L | 2650                       | 3060 | 3445 | 3855 | 4260 | 4815                   | 5055 | 5445    | 5650 | 5940 |
|                       | 10H | 2495                       | 2915 | 3330 | 3745 | 4160 | 4590                   | 4840 | 5130    |      |      |
|                       | 25  | 2520                       | 2940 | 3360 | 3780 | 4200 | 4635                   | 4885 | 5180    |      |      |
|                       | 30  | 2495                       | 2915 | 3330 | 3745 | 4160 | 4590                   | 4840 | 5130    |      |      |
|                       | 40  | 2425                       | 2830 | 3235 | 3640 | 4045 | 4465                   | 4705 | 4990    |      |      |
|                       | 50  | 2380                       | 2780 | 3175 | 3570 | 3970 | 4380                   | 4620 | 4895    |      |      |
|                       | 65  | 2310                       | 2695 | 3080 | 3470 | 3855 | 4250                   | 4485 | 4750    |      |      |
|                       | 70  | 2105                       | 2455 | 2805 | 3155 | 3505 | 3870                   | 4080 | 4325    |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## VF 600/70 R 30 NRO 168 D TL Traxion Optimal

|                       |     |                            |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692350658              |      |      |      | Section width          |      | 620 mm  |      |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1590 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 695 mm  |      |      |      |
| Recommended rim width |     | DW21B                      |      |      |      | Rolling circumference  |      | 4675 mm |      |      |      |
| Permitted rim width   |     | W/DW18L (NRO),<br>DW20B    |      |      |      | SRI                    |      | 750     |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 54 mm   |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 384 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 3225                       | 3720 | 4190 | 4690 | 5185                   | 5655 | 6155    | 6575 | 6795 | 7000 |
|                       | 10H | 3040                       | 3545 | 4050 | 4555 | 5065                   | 5560 | 5860    | 6050 |      |      |
|                       | 25  | 3065                       | 3575 | 4090 | 4600 | 5110                   | 5615 | 5915    | 6105 |      |      |
|                       | 30  | 3040                       | 3545 | 4050 | 4555 | 5065                   | 5560 | 5860    | 6050 |      |      |
|                       | 40  | 2955                       | 3445 | 3940 | 4430 | 4925                   | 5410 | 5695    | 5880 |      |      |
|                       | 50  | 2900                       | 3380 | 3865 | 4345 | 4830                   | 5305 | 5590    | 5770 |      |      |
|                       | 65  | 2815                       | 3280 | 3750 | 4220 | 4690                   | 5150 | 5425    | 5600 |      |      |
|                       | 70  | 2560                       | 2985 | 3415 | 3840 | 4265                   | 4685 | 4935    | 5095 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 620/75 R 30 172 D TL Traxion Optimal

|                       |     |                            |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692350672              |      |      |      | Section width          |      | 665 mm  |      |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1665 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 725 mm  |      |      |      |
| Recommended rim width |     | DW23B                      |      |      |      | Rolling circumference  |      | 4920 mm |      |      |      |
| Permitted rim width   |     | DW20B, DW21B               |      |      |      | SRI                    |      | 800     |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 56 mm   |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 509 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 3615                       | 4175 | 4700 | 5260 | 5815                   | 6345 | 6900    | 7375 | 7620 | 7875 |
|                       | 10H | 3405                       | 3975 | 4545 | 5110 | 5680                   | 6265 | 6570    | 6805 |      |      |
|                       | 25  | 3440                       | 4010 | 4585 | 5160 | 5730                   | 6320 | 6630    | 6865 |      |      |
|                       | 30  | 3405                       | 3975 | 4545 | 5110 | 5680                   | 6265 | 6570    | 6805 |      |      |
|                       | 40  | 3315                       | 3865 | 4415 | 4970 | 5520                   | 6090 | 6390    | 6615 |      |      |
|                       | 50  | 3250                       | 3790 | 4335 | 4875 | 5415                   | 5975 | 6265    | 6490 |      |      |
|                       | 65  | 3155                       | 3680 | 4205 | 4730 | 5260                   | 5800 | 6085    | 6300 |      |      |
|                       | 70  | 2870                       | 3350 | 3830 | 4305 | 4785                   | 5280 | 5535    | 5735 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## VF 600/70 R 34 NRO 170 D TL Traxion Optimal

|                       |     |                            |      |      |      |      |                        |      |         |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|
| EAN                   |     | 8714692360374              |      |      |      |      | Section width          |      | 605 mm  |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 1695 mm |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 735 mm  |      |      |
| Recommended rim width |     | DW21B                      |      |      |      |      | Rolling circumference  |      | 5015 mm |      |      |
| Permitted rim width   |     | W/DW18L (NRO),<br>DW20B    |      |      |      |      | SRI                    |      | 800     |      |      |
|                       |     |                            |      |      |      |      | Tread depth            |      | 55 mm   |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 440 l   |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |
| Speed (km/h)          | 10L | 3405                       | 3930 | 4425 | 4955 | 5480 | 5975                   | 6500 | 6950    | 7180 | 7500 |
|                       | 10H | 3210                       | 3745 | 4280 | 4815 | 5350 | 5885                   | 6190 | 6480    |      |      |
|                       | 25  | 3240                       | 3780 | 4320 | 4860 | 5400 | 5940                   | 6250 | 6540    |      |      |
|                       | 30  | 3210                       | 3745 | 4280 | 4815 | 5350 | 5885                   | 6190 | 6480    |      |      |
|                       | 40  | 3120                       | 3640 | 4160 | 4680 | 5200 | 5725                   | 6020 | 6300    |      |      |
|                       | 50  | 3060                       | 3570 | 4080 | 4590 | 5100 | 5615                   | 5905 | 6180    |      |      |
|                       | 65  | 2970                       | 3470 | 3965 | 4460 | 4955 | 5450                   | 5730 | 6000    |      |      |
|                       | 70  | 2705                       | 3155 | 3605 | 4055 | 4510 | 4960                   | 5215 | 5460    |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 650/60 R 34 NRO 168 D TL Traxion Optimal

|                       |     |                            |      |      |      |      |                        |      |         |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|
| EAN                   |     | 8714692344848              |      |      |      |      | Section width          |      | 670 mm  |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 1660 mm |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 750 mm  |      |      |
| Recommended rim width |     | DW23B                      |      |      |      |      | Rolling circumference  |      | 4935 mm |      |      |
| Permitted rim width   |     | DW20B (NRO),<br>DW21B      |      |      |      |      | SRI                    |      | 775     |      |      |
|                       |     |                            |      |      |      |      | Tread depth            |      | 56 mm   |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 457 l   |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |
| Speed (km/h)          | 10L | 3175                       | 3665 | 4125 | 4615 | 5105 | 5770                   | 6060 | 6520    | 6770 | 7000 |
|                       | 10H | 2990                       | 3490 | 3990 | 4485 | 4985 | 5560                   | 5800 | 6050    |      |      |
|                       | 25  | 3020                       | 3520 | 4025 | 4530 | 5030 | 5615                   | 5855 | 6105    |      |      |
|                       | 30  | 2990                       | 3490 | 3990 | 4485 | 4985 | 5560                   | 5800 | 6050    |      |      |
|                       | 40  | 2910                       | 3395 | 3875 | 4360 | 4845 | 5410                   | 5640 | 5880    |      |      |
|                       | 50  | 2855                       | 3330 | 3805 | 4280 | 4755 | 5305                   | 5530 | 5770    |      |      |
|                       | 65  | 2770                       | 3230 | 3695 | 4155 | 4615 | 5150                   | 5370 | 5600    |      |      |
|                       | 70  | 2520                       | 2940 | 3360 | 3780 | 4200 | 4685                   | 4890 | 5095    |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## VF 650/65 R 34 NRO 170 D TL Traxion Optimal

|                       |     |                            |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692344862              |      |      |      | Section width          |      | 655 mm  |      |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1715 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 775 mm  |      |      |      |
| Recommended rim width |     | DW23B                      |      |      |      | Rolling circumference  |      | 5100 mm |      |      |      |
| Permitted rim width   |     | DW20B (NRO),<br>DW21B      |      |      |      | SRI                    |      | 825     |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 56 mm   |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 508 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 3510                       | 4050 | 4560 | 5105 | 5645                   | 6155 | 6695    | 6995 | 7260 | 7500 |
|                       | 10H | 3305                       | 3860 | 4410 | 4960 | 5510                   | 5885 | 6225    | 6480 |      |      |
|                       | 25  | 3335                       | 3895 | 4450 | 5005 | 5560                   | 5940 | 6280    | 6540 |      |      |
|                       | 30  | 3305                       | 3860 | 4410 | 4960 | 5510                   | 5885 | 6225    | 6480 |      |      |
|                       | 40  | 3215                       | 3750 | 4285 | 4820 | 5360                   | 5725 | 6050    | 6300 |      |      |
|                       | 50  | 3155                       | 3680 | 4205 | 4730 | 5255                   | 5615 | 5935    | 6180 |      |      |
|                       | 65  | 3060                       | 3570 | 4080 | 4590 | 5105                   | 5450 | 5765    | 6000 |      |      |
|                       | 70  | 2785                       | 3250 | 3715 | 4180 | 4645                   | 4960 | 5245    | 5460 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 710/60 R 34 NRO 173 D TL Traxion Optimal

|                       |     |                            |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692350696              |      |      |      | Section width          |      | 705 mm  |      |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1705 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 780 mm  |      |      |      |
| Recommended rim width |     | DW25B                      |      |      |      | Rolling circumference  |      | 5080 mm |      |      |      |
| Permitted rim width   |     | DW23B (NRO)                |      |      |      | SRI                    |      | 825     |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 56 mm   |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 539 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 3640                       | 4200 | 4730 | 5290 | 5855                   | 6385 | 6945    | 7475 | 7760 | 8125 |
|                       | 10H | 3430                       | 4000 | 4570 | 5145 | 5715                   | 6265 | 6650    | 7020 |      |      |
|                       | 25  | 3460                       | 4035 | 4615 | 5190 | 5770                   | 6320 | 6710    | 7085 |      |      |
|                       | 30  | 3430                       | 4000 | 4570 | 5145 | 5715                   | 6265 | 6650    | 7020 |      |      |
|                       | 40  | 3335                       | 3890 | 4445 | 5000 | 5555                   | 6090 | 6465    | 6825 |      |      |
|                       | 50  | 3270                       | 3815 | 4360 | 4905 | 5450                   | 5975 | 6340    | 6695 |      |      |
|                       | 65  | 3175                       | 3705 | 4235 | 4760 | 5290                   | 5800 | 6155    | 6500 |      |      |
|                       | 70  | 2890                       | 3370 | 3850 | 4335 | 4815                   | 5280 | 5605    | 5915 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## VF 650/85 R 38 182 D TL Traxion Optimal

|                       |               |      |                            |         |      |      |      |      |      |       |       |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|-------|-------|------|
| EAN                   | 8714692360398 |      | Section width              | 680 mm  |      |      |      |      |      |       |       |      |
| Nominal tyre pressure | 2,0 bar       |      | Overall diameter           | 2065 mm |      |      |      |      |      |       |       |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 885 mm  |      |      |      |      |      |       |       |      |
| Recommended rim width | DW23B         |      | Rolling circumference      | 6070 mm |      |      |      |      |      |       |       |      |
| Permitted rim width   | DW20B, DW21B  |      | SRI                        | 975     |      |      |      |      |      |       |       |      |
|                       |               |      | Tread depth                | 61 mm   |      |      |      |      |      |       |       |      |
|                       |               |      | 75% of the tyre volume     | 734 l   |      |      |      |      |      |       |       |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |       |       |      |
|                       |               |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00  | 2,20  | 2,40 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |       |       |      |
| Speed (km/h)          | 10L           | 4820 | 5570                       | 6270    | 7015 | 7760 | 8460 | 9205 | 9840 | 10165 | 10625 |      |
|                       | 10H           | 4545 | 5305                       | 6060    | 6820 | 7575 | 8370 | 8765 | 9180 |       |       |      |
|                       | 25            | 4585 | 5350                       | 6115    | 6880 | 7645 | 8450 | 8845 | 9265 |       |       |      |
|                       | 30            | 4545 | 5305                       | 6060    | 6820 | 7575 | 8370 | 8765 | 9180 |       |       |      |
|                       | 40            | 4420 | 5155                       | 5890    | 6630 | 7365 | 8140 | 8520 | 8925 |       |       |      |
|                       | 50            | 4335 | 5055                       | 5780    | 6500 | 7225 | 7985 | 8360 | 8755 |       |       |      |
|                       | 65            | 4210 | 4910                       | 5610    | 6315 | 7015 | 7750 | 8115 | 8500 |       |       |      |
|                       | 70            | 3830 | 4470                       | 5105    | 5745 | 6385 | 7055 | 7385 | 7735 |       |       |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 710/60 R 38 NRO 174 D TL Traxion Optimal

|                       |               |      |                            |          |      |      |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|----------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692805677 |      | Section width              | 720* mm  |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,0 bar       |      | Overall diameter           | 1840* mm |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 810* mm  |      |      |      |      |      |      |      |      |
| Recommended rim width | DW25B         |      | Rolling circumference      | 5450* mm |      |      |      |      |      |      |      |      |
| Permitted rim width   | DW23B (NRO)   |      | SRI                        | 875      |      |      |      |      |      |      |      |      |
|                       |               |      | Tread depth                | 57 mm    |      |      |      |      |      |      |      |      |
|                       |               |      | 75% of the tyre volume     | 752 l    |      |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |          |      |      |      |      |      |      |      |      |
|                       |               |      | 0,60                       | 0,80     | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 |
|                       |               |      | Load capacity per tyre(kg) |          |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 3825 | 4420                       | 4975     | 5565 | 6155 | 6955 | 7305 | 7865 | 8160 | 8375 |      |
|                       | 10H           | 3605 | 4210                       | 4810     | 5410 | 6010 | 6640 | 6995 | 7235 |      |      |      |
|                       | 25            | 3640 | 4245                       | 4855     | 5460 | 6065 | 6705 | 7060 | 7305 |      |      |      |
|                       | 30            | 3605 | 4210                       | 4810     | 5410 | 6010 | 6640 | 6995 | 7235 |      |      |      |
|                       | 40            | 3505 | 4090                       | 4675     | 5260 | 5845 | 6460 | 6800 | 7035 |      |      |      |
|                       | 50            | 3440 | 4015                       | 4585     | 5160 | 5735 | 6335 | 6670 | 6900 |      |      |      |
|                       | 65            | 3340 | 3895                       | 4455     | 5010 | 5565 | 6150 | 6475 | 6700 |      |      |      |
|                       | 70            | 3040 | 3545                       | 4050     | 4560 | 5065 | 5595 | 5895 | 6095 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

# TRACTOR TYRES DRIVE RADIAL

## VF 710/70 R 38 181 D TL Traxion Optimall

|                       |     |                            |      |      |      |                        |      |          |      |      |       |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|----------|------|------|-------|
| EAN                   |     | 8714692805684              |      |      |      | Section width          |      | 730* mm  |      |      |       |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1945* mm |      |      |       |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 840* mm  |      |      |       |
| Recommended rim width |     | DW25B                      |      |      |      | Rolling circumference  |      | 5760* mm |      |      |       |
| Permitted rim width   |     | DW23B (NRO)                |      |      |      | SRI                    |      | 925      |      |      |       |
|                       |     |                            |      |      |      | Tread depth            |      | 61 mm    |      |      |       |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 865 l    |      |      |       |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |          |      |      |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80     | 2,00 | 2,20 | 2,40  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |          |      |      |       |
| Speed (km/h)          | 10L | 4650                       | 5370 | 6045 | 6765 | 7480                   | 8155 | 8875     | 9485 | 9800 | 10315 |
|                       | 10H | 4380                       | 5115 | 5845 | 6575 | 7305                   | 8100 | 8450     | 8910 |      |       |
|                       | 25  | 4425                       | 5160 | 5895 | 6635 | 7370                   | 8175 | 8530     | 8995 |      |       |
|                       | 30  | 4380                       | 5115 | 5845 | 6575 | 7305                   | 8100 | 8450     | 8910 |      |       |
|                       | 40  | 4260                       | 4970 | 5680 | 6390 | 7100                   | 7875 | 8215     | 8665 |      |       |
|                       | 50  | 4180                       | 4875 | 5570 | 6270 | 6965                   | 7725 | 8060     | 8500 |      |       |
|                       | 65  | 4060                       | 4735 | 5410 | 6085 | 6765                   | 7500 | 7825     | 8250 |      |       |
|                       | 70  | 3690                       | 4310 | 4925 | 5540 | 6155                   | 6825 | 7120     | 7510 |      |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

## VF 800/70 R 38 187 D TL Traxion Optimall

|                       |     |                            |      |      |      |                        |      |         |       |       |       |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|-------|-------|-------|
| EAN                   |     | 8714692350733              |      |      |      | Section width          |      | 805 mm  |       |       |       |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 2060 mm |       |       |       |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 900 mm  |       |       |       |
| Recommended rim width |     | DW27B                      |      |      |      | Rolling circumference  |      | 6100 mm |       |       |       |
| Permitted rim width   |     | DW25B                      |      |      |      | SRI                    |      | 975     |       |       |       |
|                       |     |                            |      |      |      | Tread depth            |      | 62 mm   |       |       |       |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 975 l   |       |       |       |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |       |       |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00  | 2,20  | 2,40  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |       |       |       |
| Speed (km/h)          | 10L | 5605                       | 6475 | 7290 | 8155 | 9020                   | 9835 | 10705   | 11440 | 11820 | 12190 |
|                       | 10H | 5285                       | 6165 | 7045 | 7925 | 8810                   | 9720 | 10190   | 10530 |       |       |
|                       | 25  | 5335                       | 6220 | 7110 | 8000 | 8890                   | 9810 | 10285   | 10630 |       |       |
|                       | 30  | 5285                       | 6165 | 7045 | 7925 | 8810                   | 9720 | 10190   | 10530 |       |       |
|                       | 40  | 5140                       | 5995 | 6850 | 7705 | 8565                   | 9450 | 9910    | 10240 |       |       |
|                       | 50  | 5040                       | 5880 | 6720 | 7560 | 8400                   | 9270 | 9720    | 10045 |       |       |
|                       | 65  | 4895                       | 5710 | 6525 | 7340 | 8155                   | 9000 | 9435    | 9750  |       |       |
|                       | 70  | 4455                       | 5195 | 5935 | 6680 | 7420                   | 8190 | 8585    | 8875  |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## VF 650/65 R 42 NRO 174 D TL Traxion Optimall

|                       |     |                            |      |      |      |      |                        |      |         |      |      |  |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|--|
| EAN                   |     | 8714692362279              |      |      |      |      | Section width          |      | 665 mm  |      |      |  |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 1925 mm |      |      |  |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 845 mm  |      |      |  |
| Recommended rim width |     | DW23B                      |      |      |      |      | Rolling circumference  |      | 5690 mm |      |      |  |
| Permitted rim width   |     | DW20B (NRO),<br>DW21B      |      |      |      |      | SRI                    |      | 925     |      |      |  |
|                       |     |                            |      |      |      |      | Tread depth            |      | 56 mm   |      |      |  |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 717 l   |      |      |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |  |
| Speed (km/h)          | 10L | 3870                       | 4465 | 5030 | 5625 | 6225 | 6785                   | 7385 | 7715    | 8010 | 8375 |  |
|                       | 10H | 3645                       | 4255 | 4860 | 5470 | 6075 | 6480                   | 6865 | 7235    |      |      |  |
|                       | 25  | 3680                       | 4295 | 4905 | 5520 | 6135 | 6540                   | 6925 | 7305    |      |      |  |
|                       | 30  | 3645                       | 4255 | 4860 | 5470 | 6075 | 6480                   | 6865 | 7235    |      |      |  |
|                       | 40  | 3545                       | 4135 | 4725 | 5315 | 5910 | 6300                   | 6675 | 7035    |      |      |  |
|                       | 50  | 3475                       | 4055 | 4635 | 5215 | 5795 | 6180                   | 6545 | 6900    |      |      |  |
|                       | 65  | 3375                       | 3940 | 4500 | 5065 | 5625 | 6000                   | 6355 | 6700    |      |      |  |
|                       | 70  | 3070                       | 3585 | 4095 | 4610 | 5120 | 5460                   | 5785 | 6095    |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 650/85 R 42 183 D TL Traxion Optimall

|                       |     |                            |      |      |      |      |                        |      |         |       |       |  |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|-------|-------|--|
| EAN                   |     | 8714692360411              |      |      |      |      | Section width          |      | 665 mm  |       |       |  |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 2165 mm |       |       |  |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 935 mm  |       |       |  |
| Recommended rim width |     | DW23B                      |      |      |      |      | Rolling circumference  |      | 6380 mm |       |       |  |
| Permitted rim width   |     | DW20B, DW21B               |      |      |      |      | SRI                    |      | 1025    |       |       |  |
|                       |     |                            |      |      |      |      | Tread depth            |      | 61 mm   |       |       |  |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 783 l   |       |       |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |       |       |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20  | 2,40  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |       |       |  |
| Speed (km/h)          | 10L | 5035                       | 5815 | 6545 | 7325 | 8100 | 8835                   | 9615 | 10270   | 10615 | 10940 |  |
|                       | 10H | 4745                       | 5535 | 6330 | 7120 | 7910 | 8640                   | 9155 | 9450    |       |       |  |
|                       | 25  | 4790                       | 5590 | 6385 | 7185 | 7985 | 8720                   | 9240 | 9540    |       |       |  |
|                       | 30  | 4745                       | 5535 | 6330 | 7120 | 7910 | 8640                   | 9155 | 9450    |       |       |  |
|                       | 40  | 4615                       | 5385 | 6150 | 6920 | 7690 | 8400                   | 8900 | 9190    |       |       |  |
|                       | 50  | 4525                       | 5280 | 6035 | 6790 | 7545 | 8240                   | 8730 | 9015    |       |       |  |
|                       | 65  | 4395                       | 5125 | 5860 | 6590 | 7325 | 8000                   | 8475 | 8750    |       |       |  |
|                       | 70  | 4000                       | 4665 | 5330 | 6000 | 6665 | 7280                   | 7710 | 7965    |       |       |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## VF 710/60 R 42 176 D TL Traxion Optimal

|                       |     |                            |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692362286              |      |      |      | Section width          |      | 730 mm  |      |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 1925 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 850 mm  |      |      |      |
| Recommended rim width |     | DW25B                      |      |      |      | Rolling circumference  |      | 5710 mm |      |      |      |
| Permitted rim width   |     | DW23B (NRO)                |      |      |      | SRI                    |      | 925     |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 57 mm   |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 793 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 4010                       | 4630 | 5215 | 5835 | 6455                   | 7290 | 7655    | 8240 | 8555 | 8875 |
|                       | 10H | 3780                       | 4410 | 5040 | 5670 | 6300                   | 7020 | 7330    | 7670 |      |      |
|                       | 25  | 3815                       | 4450 | 5085 | 5725 | 6360                   | 7085 | 7400    | 7740 |      |      |
|                       | 30  | 3780                       | 4410 | 5040 | 5670 | 6300                   | 7020 | 7330    | 7670 |      |      |
|                       | 40  | 3675                       | 4290 | 4900 | 5515 | 6125                   | 6825 | 7130    | 7455 |      |      |
|                       | 50  | 3605                       | 4205 | 4805 | 5410 | 6010                   | 6695 | 6990    | 7315 |      |      |
|                       | 65  | 3500                       | 4085 | 4665 | 5250 | 5835                   | 6500 | 6790    | 7100 |      |      |
|                       | 70  | 3185                       | 3715 | 4245 | 4780 | 5310                   | 5915 | 6175    | 6460 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 710/70 R 42 182 D TL Traxion Optimal

|                       |     |                            |      |      |      |                        |      |         |      |       |       |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|-------|-------|
| EAN                   |     | 8714692350719              |      |      |      | Section width          |      | 730 mm  |      |       |       |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      | Overall diameter       |      | 2060 mm |      |       |       |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 910 mm  |      |       |       |
| Recommended rim width |     | DW25B                      |      |      |      | Rolling circumference  |      | 6110 mm |      |       |       |
| Permitted rim width   |     | DW23B                      |      |      |      | SRI                    |      | 975     |      |       |       |
|                       |     |                            |      |      |      | Tread depth            |      | 62 mm   |      |       |       |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 819 l   |      |       |       |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |       |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20  | 2,40  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |       |       |
| Speed (km/h)          | 10L | 4860                       | 5615 | 6320 | 7070 | 7825                   | 8530 | 9285    | 9920 | 10250 | 10625 |
|                       | 10H | 4585                       | 5345 | 6110 | 6875 | 7640                   | 8370 | 8840    | 9180 |       |       |
|                       | 25  | 4625                       | 5395 | 6165 | 6940 | 7710                   | 8450 | 8920    | 9265 |       |       |
|                       | 30  | 4585                       | 5345 | 6110 | 6875 | 7640                   | 8370 | 8840    | 9180 |       |       |
|                       | 40  | 4455                       | 5200 | 5940 | 6685 | 7425                   | 8140 | 8595    | 8925 |       |       |
|                       | 50  | 4370                       | 5100 | 5830 | 6555 | 7285                   | 7985 | 8430    | 8755 |       |       |
|                       | 65  | 4245                       | 4950 | 5660 | 6365 | 7070                   | 7750 | 8185    | 8500 |       |       |
|                       | 70  | 3860                       | 4505 | 5150 | 5790 | 6435                   | 7055 | 7445    | 7735 |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# TRACTOR TYRES DRIVE RADIAL

## VF 710/75 R 42 184 D TL Traxion Optimal

|                       |               |      |                            |         |      |      |      |      |       |       |       |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|-------|-------|-------|------|
| EAN                   | 8714692344909 |      | Section width              | 730 mm  |      |      |      |      |       |       |       |      |
| Nominal tyre pressure | 2,0 bar       |      | Overall diameter           | 2160 mm |      |      |      |      |       |       |       |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 965 mm  |      |      |      |      |       |       |       |      |
| Recommended rim width | DW25B         |      | Rolling circumference      | 6390 mm |      |      |      |      |       |       |       |      |
| Permitted rim width   | DW23B         |      | SRI                        | 1000    |      |      |      |      |       |       |       |      |
|                       |               |      | Tread depth                | 64 mm   |      |      |      |      |       |       |       |      |
|                       |               |      | 75% of the tyre volume     | 917 l   |      |      |      |      |       |       |       |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |       |       |       |      |
|                       |               |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80  | 2,00  | 2,20  | 2,40 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |       |       |       |      |
| Speed (km/h)          | 10L           | 5170 | 5965                       | 6720    | 7515 | 8315 | 9065 | 9865 | 10545 | 10895 | 11250 |      |
|                       | 10H           | 4870 | 5685                       | 6495    | 7305 | 8120 | 8910 | 9395 | 9720  |       |       |      |
|                       | 25            | 4915 | 5735                       | 6555    | 7375 | 8195 | 8995 | 9480 | 9810  |       |       |      |
|                       | 30            | 4870 | 5685                       | 6495    | 7305 | 8120 | 8910 | 9395 | 9720  |       |       |      |
|                       | 40            | 4735 | 5525                       | 6315    | 7105 | 7895 | 8665 | 9135 | 9450  |       |       |      |
|                       | 50            | 4645 | 5420                       | 6195    | 6970 | 7740 | 8500 | 8960 | 9270  |       |       |      |
|                       | 65            | 4510 | 5260                       | 6015    | 6765 | 7515 | 8250 | 8700 | 9000  |       |       |      |
|                       | 70            | 4105 | 4790                       | 5470    | 6155 | 6840 | 7510 | 7915 | 8190  |       |       |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## VF 800/70 R 42 189 D TL Traxion Optimal

|                       |               |      |                            |         |      |      |       |       |       |       |       |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|-------|-------|-------|-------|-------|------|
| EAN                   | 8714692350757 |      | Section width              | 800 mm  |      |      |       |       |       |       |       |      |
| Nominal tyre pressure | 2,0 bar       |      | Overall diameter           | 2165 mm |      |      |       |       |       |       |       |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 930 mm  |      |      |       |       |       |       |       |      |
| Recommended rim width | DW27B         |      | Rolling circumference      | 6380 mm |      |      |       |       |       |       |       |      |
| Permitted rim width   | DW25B         |      | SRI                        | 1025    |      |      |       |       |       |       |       |      |
|                       |               |      | Tread depth                | 64 mm   |      |      |       |       |       |       |       |      |
|                       |               |      | 75% of the tyre volume     | 1043 l  |      |      |       |       |       |       |       |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |       |       |       |       |       |      |
|                       |               |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40  | 1,60  | 1,80  | 2,00  | 2,20  | 2,40 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |       |       |       |       |       |      |
| Speed (km/h)          | 10L           | 5855 | 6760                       | 7610    | 8515 | 9420 | 10270 | 11175 | 11940 | 12340 | 12875 |      |
|                       | 10H           | 5515 | 6435                       | 7355    | 8275 | 9195 | 9990  | 10640 | 11125 |       |       |      |
|                       | 25            | 5570 | 6495                       | 7425    | 8350 | 9280 | 10085 | 10740 | 11225 |       |       |      |
|                       | 30            | 5515 | 6435                       | 7355    | 8275 | 9195 | 9990  | 10640 | 11125 |       |       |      |
|                       | 40            | 5365 | 6255                       | 7150    | 8045 | 8940 | 9715  | 10345 | 10815 |       |       |      |
|                       | 50            | 5260 | 6140                       | 7015    | 7890 | 8770 | 9530  | 10145 | 10610 |       |       |      |
|                       | 65            | 5110 | 5960                       | 6810    | 7660 | 8515 | 9250  | 9850  | 10300 |       |       |      |
|                       | 70            | 4650 | 5425                       | 6200    | 6975 | 7745 | 8420  | 8965  | 9375  |       |       |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES

## DRIVE RADIAL

### VF 900/60 R 42 NRO 189 D TL Traxion Optimal

|                       |               |      |                            |         |      |      |       |       |       |       |       |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|-------|-------|-------|-------|-------|------|
| EAN                   | 8714692350771 |      | Section width              | 875 mm  |      |      |       |       |       |       |       |      |
| Nominal tyre pressure | 2,0 bar       |      | Overall diameter           | 2145 mm |      |      |       |       |       |       |       |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 920 mm  |      |      |       |       |       |       |       |      |
| Recommended rim width | DW30B         |      | Rolling circumference      | 6315 mm |      |      |       |       |       |       |       |      |
| Permitted rim width   | DW28B (NRO)   |      | SRI                        | 1025    |      |      |       |       |       |       |       |      |
|                       |               |      | Tread depth                | 64 mm   |      |      |       |       |       |       |       |      |
|                       |               |      | 75% of the tyre volume     | 1112 l  |      |      |       |       |       |       |       |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |       |       |       |       |       |      |
|                       |               |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40  | 1,60  | 1,80  | 2,00  | 2,20  | 2,40 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |       |       |       |       |       |      |
| Speed (km/h)          | 10L           | 5780 | 6670                       | 7510    | 8405 | 9300 | 10140 | 11030 | 11875 | 12325 | 12875 |      |
|                       | 10H           | 5445 | 6355                       | 7260    | 8170 | 9080 | 9990  | 10565 | 11125 |       |       |      |
|                       | 25            | 5495 | 6415                       | 7330    | 8245 | 9160 | 10085 | 10660 | 11225 |       |       |      |
|                       | 30            | 5445 | 6355                       | 7260    | 8170 | 9080 | 9990  | 10565 | 11125 |       |       |      |
|                       | 40            | 5295 | 6180                       | 7060    | 7945 | 8825 | 9715  | 10270 | 10815 |       |       |      |
|                       | 50            | 5195 | 6060                       | 6925    | 7790 | 8655 | 9530  | 10075 | 10610 |       |       |      |
|                       | 65            | 5045 | 5885                       | 6725    | 7565 | 8405 | 9250  | 9780  | 10300 |       |       |      |
|                       | 70            | 4590 | 5355                       | 6120    | 6885 | 7650 | 8420  | 8900  | 9375  |       |       |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



VREDESTEIN TRAXION XXL

✓ Wear behaviour  
under real conditions

DGL Test Report 7026



**SAVE € 1  
PER HOUR**

---

**MORE HOURS  
— ALWAYS**

---

**VREDESTEIN  
TYRES**

# TRACTOR TYRES DRIVE RADIAL



## TRAXION<sup>XXL</sup>

OFFERING HIGHEST EFFICIENCY AND  
LONGEST LIFE FOR HIGH HP TRACTORS

### FEATURES

Unique curved cleats and compound properties

Dedicated traction and comfort zone

Largest volume

### BENEFITS






Extended lifespan

Maximized traction and excellent comfort

High load capacity



# TRAXION XXL

| Ø  | Tyre size   | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 28 | 540/75 R 28 | 154 D               | 2,4                              | DW18L   | 565  | 1495   | 685  | 4440   | 30   |
|    | 600/65 R 28 | 147 D               | 1,6                              | DW18L   | 595  | 1480   | 670  | 4405   | 30   |
|    | 600/65 R 28 | 154 D               | 2,4                              | DW18L   | 595  | 1480   | 670  | 4405   | 31   |
|    | 600/70 R 28 | 157 D               | 2,4                              | DW20B   | 610  | 1540   | 700  | 4590   | 31   |
| 30 | 600/70 R 30 | 158 D               | 2,4                              | DW20B   | 630  | 1590   | 725  | 4750   | 32   |
|    | 710/60 R 30 | 162 D               | 2,4                              | DW23B   | 705  | 1610   | 730  | 4800   | 32   |
| 32 | 800/65 R 32 | 167 A8/B            | 1,6                              | DW27B   | 825  | 1840   | 845  | 5490   | 33   |
| 34 | 600/70 R 34 | 160 D               | 2,4                              | DW18L   | 610  | 1700   | 775  | 5060   | 33   |
| 38 | 650/75 R 38 | 169 D               | 2,4                              | DW23B   | 695  | 1935   | 890  | 5775   | 34   |
|    | 650/85 R 38 | 173 D               | 2,4                              | DW23B   | 710  | 2070   | 940  | 6195   | 34   |
|    | 710/70 R 38 | 166 D               | 1,6                              | DW23B   | 730  | 1930   | 870  | 5760   | 35   |
|    | 710/70 R 38 | 171 D               | 2,4                              | DW23B   | 730  | 1930   | 870  | 5760   | 35   |
|    | 710/75 R 38 | 174 D               | 2,4                              | DW23B   | 715  | 2000   | 910  | 5950   | 36   |
|    | 800/70 R 38 | 178 D               | 2,4                              | DW25B   | 825  | 2065   | 940  | 6160   | 36   |
|    | 900/60 R 38 | 178 D               | 2,4                              | DW27B   | 870  | 2040   | 925  | 6100   | 37   |
| 42 | 710/70 R 42 | 173 D               | 2,4                              | DW23B   | 730  | 2060   | 940  | 6140   | 37   |
|    | 710/75 R 42 | 175 D               | 2,4                              | DW23B   | 735  | 2150   | 980  | 6395   | 38   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 540/75 R 28 154 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692214165              |      |      |      |      |      | Section width          |      | 565 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 1495 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 685 mm  |      |      |      |
| Recommended rim width |     | DW18L                      |      |      |      |      |      | Rolling circumference  |      | 4440 mm |      |      |      |
| Permitted rim width   |     | W/DW16L, W18L              |      |      |      |      |      | SRI                    |      | 700     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 50 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 340 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 2655                       | 3015 | 3380 | 3745 | 4110 | 4405 | 4655                   | 4935 | 5145    | 5320 | 5540 | 5625 |
|                       | 10H | 2205                       | 2555 | 2905 | 3250 | 3495 | 3735 | 3905                   | 4070 | 4215    | 4315 |      |      |
|                       | 25  | 2270                       | 2635 | 2995 | 3350 | 3600 | 3850 | 4020                   | 4195 | 4345    | 4445 |      |      |
|                       | 30  | 2205                       | 2555 | 2905 | 3250 | 3495 | 3735 | 3905                   | 4070 | 4215    | 4315 |      |      |
|                       | 40  |                            | 2435 | 2765 | 3095 | 3325 | 3560 | 3715                   | 3875 | 4015    | 4105 |      |      |
|                       | 50  |                            | 2335 | 2655 | 2970 | 3190 | 3415 | 3565                   | 3715 | 3850    | 3940 |      |      |
|                       | 65  |                            |      | 2525 | 2830 | 3040 | 3250 | 3395                   | 3540 | 3665    | 3750 |      |      |
| 70                    |     |                            | 2300 | 2575 | 2765 | 2960 | 3090 | 3220                   | 3335 | 3415    |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 600/65 R 28 147 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |  |  |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|--|--|--|
| EAN                   |     | 8714692326943              |      |      |      |      |      | Section width          |      | 595 mm  |  |  |  |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      |      |      | Overall diameter       |      | 1490 mm |  |  |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 670 mm  |  |  |  |
| Recommended rim width |     | DW18L                      |      |      |      |      |      | Rolling circumference  |      | 4405 mm |  |  |  |
| Permitted rim width   |     | W18L                       |      |      |      |      |      | SRI                    |      | 700     |  |  |  |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 50 mm   |  |  |  |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 370 l   |  |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |  |  |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 |         |  |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |  |  |  |
| Speed (km/h)          | 10L | 2575                       | 2920 | 3280 | 3625 | 3985 | 4260 | 4500                   | 4775 |         |  |  |  |
|                       | 10H | 2135                       | 2480 | 2815 | 3105 | 3355 | 3535 |                        |      |         |  |  |  |
|                       | 25  | 2200                       | 2555 | 2900 | 3200 | 3455 | 3645 |                        |      |         |  |  |  |
|                       | 30  | 2135                       | 2480 | 2815 | 3105 | 3355 | 3535 |                        |      |         |  |  |  |
|                       | 40  |                            | 2360 | 2680 | 2955 | 3190 | 3365 |                        |      |         |  |  |  |
|                       | 50  |                            | 2260 | 2570 | 2835 | 3060 | 3230 |                        |      |         |  |  |  |
|                       | 65  |                            |      | 2450 | 2700 | 2915 | 3075 |                        |      |         |  |  |  |
| 70                    |     |                            | 2230 | 2460 | 2655 | 2800 |      |                        |      |         |  |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 600/65 R 28 154 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |      |      |                        |      |         |      |  |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------|------|------------------------|------|---------|------|--|--|
| EAN                   |     | 8714692326950              |      |      |      |      |      |      |      | Section width          |      | 595 mm  |      |  |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      |      |      | Overall diameter       |      | 1490 mm |      |  |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      |      |      | Static loaded radius   |      | 670 mm  |      |  |  |
| Recommended rim width |     | DW18L                      |      |      |      |      |      |      |      | Rolling circumference  |      | 4405 mm |      |  |  |
| Permitted rim width   |     | W18L                       |      |      |      |      |      |      |      | SRI                    |      | 700     |      |  |  |
|                       |     |                            |      |      |      |      |      |      |      | Tread depth            |      | 50 mm   |      |  |  |
|                       |     |                            |      |      |      |      |      |      |      | 75% of the tyre volume |      | 370 l   |      |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |                        |      |         |      |  |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20                   | 2,40 | 2,60    | 2,80 |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |                        |      |         |      |  |  |
| Speed (km/h)          | 10L | 2610                       | 2960 | 3320 | 3675 | 4035 | 4320 | 4555 | 4835 | 5045                   | 5280 | 5510    | 5625 |  |  |
|                       | 10H | 2165                       | 2510 | 2855 | 3145 | 3395 | 3620 | 3835 | 4025 | 4195                   | 4315 |         |      |  |  |
|                       | 25  | 2230                       | 2585 | 2940 | 3245 | 3500 | 3735 | 3955 | 4150 | 4325                   | 4445 |         |      |  |  |
|                       | 30  | 2165                       | 2510 | 2855 | 3145 | 3395 | 3620 | 3835 | 4025 | 4195                   | 4315 |         |      |  |  |
|                       | 40  |                            | 2390 | 2715 | 2995 | 3235 | 3450 | 3655 | 3835 | 3995                   | 4105 |         |      |  |  |
|                       | 50  |                            | 2290 | 2605 | 2875 | 3100 | 3310 | 3505 | 3675 | 3830                   | 3940 |         |      |  |  |
|                       | 65  |                            |      | 2480 | 2735 | 2955 | 3150 | 3335 | 3500 | 3650                   | 3750 |         |      |  |  |
|                       | 70  |                            |      | 2260 | 2490 | 2690 | 2865 | 3035 | 3185 | 3320                   | 3415 |         |      |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 600/70 R 28 157 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |      |      |                        |      |         |      |  |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------|------|------------------------|------|---------|------|--|--|
| EAN                   |     | 8714692244629              |      |      |      |      |      |      |      | Section width          |      | 610 mm  |      |  |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      |      |      | Overall diameter       |      | 1540 mm |      |  |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      |      |      | Static loaded radius   |      | 700 mm  |      |  |  |
| Recommended rim width |     | DW20B                      |      |      |      |      |      |      |      | Rolling circumference  |      | 4590 mm |      |  |  |
| Permitted rim width   |     | W/DW18L                    |      |      |      |      |      |      |      | SRI                    |      | 725     |      |  |  |
|                       |     |                            |      |      |      |      |      |      |      | Tread depth            |      | 51 mm   |      |  |  |
|                       |     |                            |      |      |      |      |      |      |      | 75% of the tyre volume |      | 405 l   |      |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |                        |      |         |      |  |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20                   | 2,40 | 2,60    | 2,80 |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |                        |      |         |      |  |  |
| Speed (km/h)          | 10L | 2945                       | 3340 | 3750 | 4150 | 4560 | 4885 | 5165 | 5475 | 5705                   | 5900 | 6140    | 6190 |  |  |
|                       | 10H | 2445                       | 2835 | 3225 | 3605 | 3875 | 4080 | 4330 | 4515 | 4675                   | 4745 |         |      |  |  |
|                       | 25  | 2515                       | 2920 | 3320 | 3715 | 3990 | 4205 | 4460 | 4650 | 4820                   | 4890 |         |      |  |  |
|                       | 30  | 2445                       | 2835 | 3225 | 3605 | 3875 | 4080 | 4330 | 4515 | 4675                   | 4745 |         |      |  |  |
|                       | 40  |                            | 2700 | 3070 | 3435 | 3690 | 3885 | 4120 | 4300 | 4450                   | 4515 |         |      |  |  |
|                       | 50  |                            | 2590 | 2945 | 3295 | 3535 | 3730 | 3950 | 4120 | 4270                   | 4330 |         |      |  |  |
|                       | 65  |                            |      | 2805 | 3135 | 3370 | 3550 | 3765 | 3925 | 4065                   | 4125 |         |      |  |  |
|                       | 70  |                            |      | 2550 | 2855 | 3065 | 3230 | 3425 | 3575 | 3700                   | 3755 |         |      |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 600/70 R 30 158 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|--|
| EAN                   |     | 8714692326967              |      |      |      |      |      | Section width          |      | 630 mm  |      |      |      |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 1590 mm |      |      |      |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 725 mm  |      |      |      |  |
| Recommended rim width |     | DW20B                      |      |      |      |      |      | Rolling circumference  |      | 4750 mm |      |      |      |  |
| Permitted rim width   |     | W/DW18L                    |      |      |      |      |      | SRI                    |      | 750     |      |      |      |  |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 53 mm   |      |      |      |  |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 430 l   |      |      |      |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |  |
| Speed (km/h)          | 10L | 3030                       | 3440 | 3860 | 4275 | 4695 | 5030 | 5320                   | 5635 | 5875    | 6075 | 6325 | 6375 |  |
|                       | 10H | 2515                       | 2920 | 3320 | 3715 | 3990 | 4200 | 4455                   | 4650 | 4815    | 4890 |      |      |  |
|                       | 25  | 2590                       | 3010 | 3420 | 3825 | 4110 | 4325 | 4590                   | 4790 | 4960    | 5035 |      |      |  |
|                       | 30  | 2515                       | 2920 | 3320 | 3715 | 3990 | 4200 | 4455                   | 4650 | 4815    | 4890 |      |      |  |
|                       | 40  |                            | 2780 | 3160 | 3535 | 3800 | 3995 | 4245                   | 4425 | 4585    | 4655 |      |      |  |
|                       | 50  |                            | 2665 | 3030 | 3390 | 3640 | 3835 | 4070                   | 4245 | 4395    | 4465 |      |      |  |
|                       | 65  |                            |      | 2885 | 3230 | 3470 | 3650 | 3875                   | 4045 | 4185    | 4250 |      |      |  |
| 70                    |     |                            | 2625 | 2940 | 3155 | 3320 | 3525 | 3680                   | 3810 | 3870    |      |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 710/60 R 30 162 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|--|
| EAN                   |     | 8714692277146              |      |      |      |      |      | Section width          |      | 705 mm  |      |      |      |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 1610 mm |      |      |      |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 730 mm  |      |      |      |  |
| Recommended rim width |     | DW23B                      |      |      |      |      |      | Rolling circumference  |      | 4800 mm |      |      |      |  |
| Permitted rim width   |     | DW21B, DW25B               |      |      |      |      |      | SRI                    |      | 750     |      |      |      |  |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 53 mm   |      |      |      |  |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 520 l   |      |      |      |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |  |
| Speed (km/h)          | 10L | 3255                       | 3695 | 4145 | 4585 | 5040 | 5390 | 5690                   | 6035 | 6295    | 6590 | 6880 | 7125 |  |
|                       | 10H | 2700                       | 3135 | 3560 | 3930 | 4240 | 4455 | 4790                   | 5025 | 5235    | 5465 |      |      |  |
|                       | 25  | 2785                       | 3230 | 3670 | 4050 | 4370 | 4590 | 4935                   | 5180 | 5395    | 5630 |      |      |  |
|                       | 30  | 2700                       | 3135 | 3560 | 3930 | 4240 | 4455 | 4790                   | 5025 | 5235    | 5465 |      |      |  |
|                       | 40  |                            | 2985 | 3390 | 3740 | 4035 | 4245 | 4560                   | 4785 | 4985    | 5200 |      |      |  |
|                       | 50  |                            | 2860 | 3250 | 3585 | 3870 | 4070 | 4370                   | 4590 | 4780    | 4990 |      |      |  |
|                       | 65  |                            |      | 3095 | 3415 | 3685 | 3875 | 4165                   | 4370 | 4555    | 4750 |      |      |  |
| 70                    |     |                            | 2820 | 3110 | 3355 | 3525 | 3790 | 3975                   | 4145 | 4325    |      |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# TRACTOR TYRES DRIVE RADIAL

## 800/65 R 32 167 A8/B TL TraxionXXL

|                       |     |                            |      |      |      |                        |      |         |      |  |  |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|--|
| EAN                   |     | 8714692206306              |      |      |      | Section width          |      | 825 mm  |      |  |  |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1840 mm |      |  |  |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 845 mm  |      |  |  |
| Recommended rim width |     | DW27B                      |      |      |      | Rolling circumference  |      | 5490 mm |      |  |  |
| Permitted rim width   |     | DW25B                      |      |      |      | SRI                    |      | 875     |      |  |  |
|                       |     |                            |      |      |      | Tread depth            |      | 54 mm   |      |  |  |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 815 l   |      |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |  |
| Speed (km/h)          | 10L | 4455                       | 5050 | 5670 | 6270 | 6890                   | 7370 | 7775    | 8255 |  |  |
|                       | 10H | 3435                       | 3985 | 4530 | 4995 | 5395                   | 5830 |         |      |  |  |
|                       | 25  | 3565                       | 4135 | 4700 | 5185 | 5595                   | 6050 |         |      |  |  |
|                       | 30  | 3435                       | 3985 | 4530 | 4995 | 5395                   | 5830 |         |      |  |  |
|                       | 40  |                            | 3725 | 4235 | 4670 | 5040                   | 5450 |         |      |  |  |
|                       | 50  |                            | 3725 | 4235 | 4670 | 5040                   | 5450 |         |      |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 600/70 R 34 160 D TL TraxionXXL

|                       |     |                            |      |      |      |                        |      |         |      |      |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|------|------|
| EAN                   |     | 8714692244643              |      |      |      | Section width          |      | 610 mm  |      |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      | Overall diameter       |      | 1700 mm |      |      |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 775 mm  |      |      |      |      |      |
| Recommended rim width |     | DW18L                      |      |      |      | Rolling circumference  |      | 5060 mm |      |      |      |      |      |
| Permitted rim width   |     | W18L, DW20B                |      |      |      | SRI                    |      | 800     |      |      |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 53 mm   |      |      |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 460 l   |      |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |      |      |
| Speed (km/h)          | 10L | 3205                       | 3635 | 4080 | 4515 | 4960                   | 5315 | 5620    | 5955 | 6205 | 6420 | 6680 | 6750 |
|                       | 10H | 2660                       | 3085 | 3505 | 3925 | 4215                   | 4455 | 4710    | 4910 | 5085 | 5175 |      |      |
|                       | 25  | 2740                       | 3180 | 3615 | 4045 | 4345                   | 4590 | 4850    | 5060 | 5240 | 5335 |      |      |
|                       | 30  | 2660                       | 3085 | 3505 | 3925 | 4215                   | 4455 | 4710    | 4910 | 5085 | 5175 |      |      |
|                       | 40  |                            | 2935 | 3340 | 3735 | 4015                   | 4245 | 4485    | 4675 | 4845 | 4930 |      |      |
|                       | 50  |                            | 2815 | 3200 | 3585 | 3850                   | 4070 | 4300    | 4485 | 4645 | 4725 |      |      |
|                       | 65  |                            |      | 3050 | 3410 | 3665                   | 3875 | 4095    | 4270 | 4425 | 4500 |      |      |
|                       | 70  |                            |      | 2775 | 3105 | 3335                   | 3525 | 3725    | 3885 | 4025 | 4095 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 650/75 R 38 169 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692206269              |      |      |      |      |      | Section width          |      | 695 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 1935 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 890 mm  |      |      |      |
| Recommended rim width |     | DW23B                      |      |      |      |      |      | Rolling circumference  |      | 5775 mm |      |      |      |
| Permitted rim width   |     | DW21B, DW20B               |      |      |      |      |      | SRI                    |      | 925     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 54 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 705 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 4050                       | 4600 | 5165 | 5715 | 6275 | 6720 | 7110                   | 7535 | 7850    | 8125 | 8455 | 8700 |
|                       | 10H | 3360                       | 3900 | 4435 | 4965 | 5330 | 5605 | 5955                   | 6215 | 6435    | 6670 |      |      |
|                       | 25  | 3465                       | 4020 | 4570 | 5115 | 5495 | 5775 | 6140                   | 6405 | 6630    | 6875 |      |      |
|                       | 30  | 3360                       | 3900 | 4435 | 4965 | 5330 | 5605 | 5955                   | 6215 | 6435    | 6670 |      |      |
|                       | 40  |                            | 3715 | 4225 | 4725 | 5075 | 5340 | 5670                   | 5915 | 6125    | 6350 |      |      |
|                       | 50  |                            | 3565 | 4050 | 4535 | 4870 | 5120 | 5440                   | 5675 | 5875    | 6090 |      |      |
|                       | 65  |                            |      | 3860 | 4315 | 4635 | 4875 | 5180                   | 5405 | 5595    | 5800 |      |      |
| 70                    |     |                            | 3510 | 3930 | 4220 | 4435 | 4715 | 4920                   | 5090 | 5280    |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/85 R 38 173 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692206221              |      |      |      |      |      | Section width          |      | 710 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 2070 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 940 mm  |      |      |      |
| Recommended rim width |     | DW23B                      |      |      |      |      |      | Rolling circumference  |      | 6195 mm |      |      |      |
| Permitted rim width   |     | DW21B, DW20B               |      |      |      |      |      | SRI                    |      | 975     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 55 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 850 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 4535                       | 5145 | 5780 | 6395 | 7025 | 7525 | 7955                   | 8435 | 8785    | 9090 | 9460 | 9750 |
|                       | 10H | 3765                       | 4365 | 4965 | 5555 | 5970 | 6265 | 6665                   | 6955 | 7200    | 7475 |      |      |
|                       | 25  | 3880                       | 4500 | 5115 | 5725 | 6150 | 6460 | 6870                   | 7165 | 7420    | 7705 |      |      |
|                       | 30  | 3765                       | 4365 | 4965 | 5555 | 5970 | 6265 | 6665                   | 6955 | 7200    | 7475 |      |      |
|                       | 40  |                            | 4160 | 4730 | 5290 | 5680 | 5970 | 6350                   | 6625 | 6860    | 7120 |      |      |
|                       | 50  |                            | 3990 | 4535 | 5075 | 5450 | 5725 | 6085                   | 6350 | 6575    | 6825 |      |      |
|                       | 65  |                            |      | 4315 | 4830 | 5190 | 5450 | 5800                   | 6050 | 6265    | 6500 |      |      |
| 70                    |     |                            | 3930 | 4395 | 4720 | 4960 | 5275 | 5505                   | 5700 | 5915    |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 710/70 R 38 166 D TL TraxionXXL

|                       |     |                            |      |      |      |                        |      |         |      |  |  |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|--|
| EAN                   |     | 8714692326974              |      |      |      | Section width          |      | 730 mm  |      |  |  |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1930 mm |      |  |  |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 870 mm  |      |  |  |
| Recommended rim width |     | DW23B                      |      |      |      | Rolling circumference  |      | 5760 mm |      |  |  |
| Permitted rim width   |     | DW25B                      |      |      |      | SRI                    |      | 925     |      |  |  |
|                       |     |                            |      |      |      | Tread depth            |      | 58 mm   |      |  |  |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 755 l   |      |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |  |
| Speed (km/h)          | 10L | 4370                       | 4965 | 5570 | 6165 | 6770                   | 7255 | 7670    | 8130 |  |  |
|                       | 10H | 3630                       | 4210 | 4785 | 5355 | 5755                   | 6095 |         |      |  |  |
|                       | 25  | 3740                       | 4340 | 4935 | 5520 | 5930                   | 6280 |         |      |  |  |
|                       | 30  | 3630                       | 4210 | 4785 | 5355 | 5755                   | 6095 |         |      |  |  |
|                       | 40  |                            | 4010 | 4560 | 5100 | 5480                   | 5805 |         |      |  |  |
|                       | 50  |                            | 3845 | 4370 | 4890 | 5255                   | 5565 |         |      |  |  |
|                       | 65  |                            |      | 4160 | 4660 | 5005                   | 5300 |         |      |  |  |
|                       | 70  |                            |      | 3790 | 4240 | 4555                   | 4825 |         |      |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 710/70 R 38 171 D TL TraxionXXL

|                       |     |                            |      |      |      |                        |      |         |      |      |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|------|------|
| EAN                   |     | 8714692326981              |      |      |      | Section width          |      | 730 mm  |      |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      | Overall diameter       |      | 1940 mm |      |      |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 870 mm  |      |      |      |      |      |
| Recommended rim width |     | DW23B                      |      |      |      | Rolling circumference  |      | 5760 mm |      |      |      |      |      |
| Permitted rim width   |     | DW25B                      |      |      |      | SRI                    |      | 925     |      |      |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 58 mm   |      |      |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 755 l   |      |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |      |      |
| Speed (km/h)          | 10L | 4370                       | 4965 | 5570 | 6165 | 6770                   | 7255 | 7670    | 8130 | 8470 | 8765 | 9120 | 9225 |
|                       | 10H | 3630                       | 4210 | 4785 | 5355 | 5755                   | 6095 | 6430    | 6705 | 6945 | 7070 |      |      |
|                       | 25  | 3740                       | 4340 | 4935 | 5520 | 5930                   | 6280 | 6625    | 6910 | 7155 | 7290 |      |      |
|                       | 30  | 3630                       | 4210 | 4785 | 5355 | 5755                   | 6095 | 6430    | 6705 | 6945 | 7070 |      |      |
|                       | 40  |                            | 4010 | 4560 | 5100 | 5480                   | 5805 | 6120    | 6385 | 6610 | 6735 |      |      |
|                       | 50  |                            | 3845 | 4370 | 4890 | 5255                   | 5565 | 5870    | 6125 | 6340 | 6460 |      |      |
|                       | 65  |                            |      | 4160 | 4660 | 5005                   | 5300 | 5590    | 5830 | 6040 | 6150 |      |      |
|                       | 70  |                            |      | 3790 | 4240 | 4555                   | 4825 | 5085    | 5305 | 5495 | 5595 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 710/75 R 38 174 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |       |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|-------|
| EAN                   |     | 8714692291487              |      |      |      |      |      | Section width          |      | 715 mm  |      |      |       |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 2000 mm |      |      |       |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 910 mm  |      |      |       |
| Recommended rim width |     | DW23B                      |      |      |      |      |      | Rolling circumference  |      | 5950 mm |      |      |       |
| Permitted rim width   |     | DW25B                      |      |      |      |      |      | SRI                    |      | 950     |      |      |       |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 57 mm   |      |      |       |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 815 l   |      |      |       |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |       |
| Speed (km/h)          | 10L | 4650                       | 5280 | 5925 | 6560 | 7205 | 7715 | 8160                   | 8650 | 9010    | 9325 | 9705 | 10050 |
|                       | 10H | 3860                       | 4480 | 5095 | 5700 | 6120 | 6440 | 6840                   | 7135 | 7390    | 7705 |      |       |
|                       | 25  | 3980                       | 4615 | 5250 | 5875 | 6310 | 6635 | 7045                   | 7350 | 7615    | 7940 |      |       |
|                       | 30  | 3860                       | 4480 | 5095 | 5700 | 6120 | 6440 | 6840                   | 7135 | 7390    | 7705 |      |       |
|                       | 40  |                            | 4265 | 4850 | 5425 | 5830 | 6130 | 6510                   | 6795 | 7035    | 7335 |      |       |
|                       | 50  |                            | 4090 | 4650 | 5205 | 5590 | 5880 | 6245                   | 6515 | 6745    | 7035 |      |       |
|                       | 65  |                            |      | 4430 | 4955 | 5325 | 5600 | 5945                   | 6205 | 6425    | 6700 |      |       |
| 70                    |     |                            | 4030 | 4510 | 4845 | 5095 | 5410 | 5645                   | 5845 | 6095    |      |      |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/70 R 38 178 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |       |       |       |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|-------|-------|-------|
| EAN                   |     | 8714692206283              |      |      |      |      |      | Section width          |      | 825 mm  |       |       |       |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 2065 mm |       |       |       |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 940 mm  |       |       |       |
| Recommended rim width |     | DW25B                      |      |      |      |      |      | Rolling circumference  |      | 6160 mm |       |       |       |
| Permitted rim width   |     | DW27B                      |      |      |      |      |      | SRI                    |      | 975     |       |       |       |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 58 mm   |       |       |       |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 985 l   |       |       |       |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |       |       |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40  | 2,60  | 2,80  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |       |       |       |
| Speed (km/h)          | 10L | 5275                       | 5985 | 6720 | 7435 | 8165 | 8745 | 9250                   | 9805 | 10215   | 10570 | 11000 | 11250 |
|                       | 10H | 4375                       | 5080 | 5775 | 6460 | 6940 | 7475 | 7750                   | 8085 | 8375    | 8625  |       |       |
|                       | 25  | 4510                       | 5230 | 5950 | 6655 | 7150 | 7705 | 7990                   | 8335 | 8630    | 8890  |       |       |
|                       | 30  | 4375                       | 5080 | 5775 | 6460 | 6940 | 7475 | 7750                   | 8085 | 8375    | 8625  |       |       |
|                       | 40  |                            | 4835 | 5495 | 6150 | 6605 | 7120 | 7380                   | 7700 | 7975    | 8215  |       |       |
|                       | 50  |                            | 4635 | 5270 | 5900 | 6335 | 6825 | 7080                   | 7385 | 7645    | 7875  |       |       |
|                       | 65  |                            |      | 5020 | 5615 | 6035 | 6500 | 6740                   | 7030 | 7280    | 7500  |       |       |
| 70                    |     |                            | 4570 | 5110 | 5490 | 5915 | 6135 | 6400                   | 6625 | 6825    |       |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 900/60 R 38 178 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |       |       |       |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|-------|-------|-------|
| EAN                   |     | 8714692309755              |      |      |      |      |      | Section width          |      | 870 mm  |       |       |       |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 2040 mm |       |       |       |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 925 mm  |       |       |       |
| Recommended rim width |     | DW27B                      |      |      |      |      |      | Rolling circumference  |      | 6100 mm |       |       |       |
| Permitted rim width   |     | DW28B, DW30B               |      |      |      |      |      | SRI                    |      | 975     |       |       |       |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 60 mm   |       |       |       |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 1050 l  |       |       |       |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |       |       |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40  | 2,60  | 2,80  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |       |       |       |
| Speed (km/h)          | 10L | 5230                       | 5935 | 6660 | 7370 | 8090 | 8655 | 9135                   | 9695 | 10115   | 10580 | 11050 | 11250 |
|                       | 10H | 4340                       | 5035 | 5720 | 6310 | 6810 | 7245 | 7690                   | 8070 | 8415    | 8625  |       |       |
|                       | 25  | 4470                       | 5185 | 5895 | 6500 | 7020 | 7465 | 7925                   | 8320 | 8670    | 8890  |       |       |
|                       | 30  | 4340                       | 5035 | 5720 | 6310 | 6810 | 7245 | 7690                   | 8070 | 8415    | 8625  |       |       |
|                       | 40  |                            | 4795 | 5445 | 6010 | 6485 | 6900 | 7325                   | 7685 | 8010    | 8250  |       |       |
|                       | 50  |                            | 4595 | 5225 | 5760 | 6220 | 6615 | 7025                   | 7370 | 7680    | 7875  |       |       |
|                       | 65  |                            |      | 4975 | 5485 | 5920 | 6300 | 6690                   | 7020 | 7315    | 7500  |       |       |
|                       | 70  |                            |      | 4525 | 4995 | 5390 | 5735 | 6085                   | 6390 | 6655    | 6825  |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 710/70 R 42 173 D TL TraxionXXL

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692326998              |      |      |      |      |      | Section width          |      | 730 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 2060 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 940 mm  |      |      |      |
| Recommended rim width |     | DW23B                      |      |      |      |      |      | Rolling circumference  |      | 6140 mm |      |      |      |
| Permitted rim width   |     | DW25B                      |      |      |      |      |      | SRI                    |      | 975     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 58 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 825 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 4575                       | 5190 | 5825 | 6450 | 7080 | 7585 | 8020                   | 8500 | 8860    | 9165 | 9540 | 9750 |
|                       | 10H | 3795                       | 4405 | 5005 | 5600 | 6015 | 6440 | 6720                   | 7015 | 7260    | 7475 |      |      |
|                       | 25  | 3910                       | 4540 | 5160 | 5775 | 6200 | 6635 | 6925                   | 7225 | 7485    | 7705 |      |      |
|                       | 30  | 3795                       | 4405 | 5005 | 5600 | 6015 | 6440 | 6720                   | 7015 | 7260    | 7475 |      |      |
|                       | 40  |                            | 4195 | 4765 | 5335 | 5730 | 6130 | 6400                   | 6680 | 6915    | 7120 |      |      |
|                       | 50  |                            | 4020 | 4570 | 5115 | 5495 | 5880 | 6140                   | 6405 | 6630    | 6825 |      |      |
|                       | 65  |                            |      | 4355 | 4870 | 5230 | 5600 | 5845                   | 6100 | 6315    | 6500 |      |      |
|                       | 70  |                            |      | 3960 | 4435 | 4760 | 5095 | 5320                   | 5550 | 5745    | 5915 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES

## DRIVE RADIAL

### 710/75 R 42 175 D TL TraxionXXL

|                       |               |                            |                        |         |      |      |      |      |      |      |      |       |       |
|-----------------------|---------------|----------------------------|------------------------|---------|------|------|------|------|------|------|------|-------|-------|
| EAN                   | 8714692244520 |                            | Section width          | 735 mm  |      |      |      |      |      |      |      |       |       |
| Nominal tyre pressure | 2,4 bar       |                            | Overall diameter       | 2150 mm |      |      |      |      |      |      |      |       |       |
| Tyre construction     | Radial        |                            | Static loaded radius   | 980 mm  |      |      |      |      |      |      |      |       |       |
| Recommended rim width | DW23B         |                            | Rolling circumference  | 6395 mm |      |      |      |      |      |      |      |       |       |
| Permitted rim width   | DW25B         |                            | SRI                    | 1000    |      |      |      |      |      |      |      |       |       |
|                       |               |                            | Tread depth            | 58 mm   |      |      |      |      |      |      |      |       |       |
|                       |               |                            | 75% of the tyre volume | 910 l   |      |      |      |      |      |      |      |       |       |
|                       |               | Tyre pressure (bar)        |                        |         |      |      |      |      |      |      |      |       |       |
|                       |               | 0,60                       | 0,80                   | 1,00    | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60  | 2,80  |
|                       |               | Load capacity per tyre(kg) |                        |         |      |      |      |      |      |      |      |       |       |
| Speed (km/h)          | 10L           | 4860                       | 5515                   | 6190    | 6855 | 7525 | 8060 | 8525 | 9035 | 9415 | 9745 | 10140 | 10350 |
|                       | 10H           | 4035                       | 4680                   | 5320    | 5955 | 6395 | 6900 | 7145 | 7455 | 7720 | 7935 |       |       |
|                       | 25            | 4155                       | 4825                   | 5485    | 6135 | 6590 | 7110 | 7360 | 7680 | 7955 | 8175 |       |       |
|                       | 30            | 4035                       | 4680                   | 5320    | 5955 | 6395 | 6900 | 7145 | 7455 | 7720 | 7935 |       |       |
|                       | 40            |                            | 4455                   | 5065    | 5670 | 6090 | 6570 | 6805 | 7095 | 7350 | 7555 |       |       |
|                       | 50            |                            | 4275                   | 4860    | 5435 | 5840 | 6300 | 6525 | 6805 | 7045 | 7245 |       |       |
|                       | 65            |                            |                        | 4625    | 5180 | 5560 | 6000 | 6215 | 6480 | 6710 | 6900 |       |       |
| 70                    |               |                            | 4210                   | 4710    | 5060 | 5460 | 5655 | 5900 | 6110 | 6280 |      |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL



# TRACTOR TYRES DRIVE RADIAL



## TRAXION 65

HIGHEST PRODUCTIVITY FOR  
MODERN HIGH-TECH TRACTORS

### FEATURES

Traxion concept with unique tread compound and high rubber content in the center

Traction zone: transverse and non-parallel lugs on the outside of the tread

Comfort zone: extra-large contact area in the center for continuous road contact

### BENEFITS

30% longer lifespan\*

Highest traction & excellent self-cleaning on all soil types

29% lower 'in cabin' noise\*\*






\* Compared with premium competitors according to Vredestein R&D test programmes.

\*\* Compared with premium competitors on a ISO certified (ISO10844:2014) RDW test track at 40km/h, according to Vredestein R&D test programmes.





# TRAXION 65

| Ø  | Tyre size   | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 16 | 320/65 R 16 | 117 D               | 2,4                              | W10   | 320  | 825  | 370  | 2455   | 42   |
| 18 | 320/65 R 18 | 119 D               | 2,4                              | W9  | 310  | 875  | 390  | 2605   | 42   |
|    | 340/65 R 18 | 122 D               | 2,4                              | W9  | 320  | 905  | 415  | 2700   | 43   |
| 20 | 420/65 R 20 | 135 D               | 2,4                              | W13   | 415  | 1055   | 480  | 3165   | 43   |
| 24 | 440/65 R 24 | 128 D               | 1,6                              | DW14L   | 440  | 1185   | 540  | 3545   | 44   |
|    | 480/65 R 24 | 133 D               | 1,6                              | DW15L   | 485  | 1250   | 570  | 3735   | 44   |
|    | 540/65 R 24 | 140 D               | 1,6                              | DW16L   | 540  | 1315   | 590  | 3920   | 45   |
| 28 | 440/65 R 28 | 131 D               | 1,6                              | DW14L   | 440  | 1290   | 590  | 3870   | 45   |
|    | 480/65 R 28 | 136 D               | 1,6                              | DW15L   | 485  | 1350   | 610  | 4015   | 46   |
|    | 540/65 R 28 | 142 D               | 1,6                              | DW16L   | 540  | 1410   | 635  | 4210   | 46   |
| 30 | 540/65 R 30 | 143 D               | 1,6                              | DW16L   | 540  | 1460   | 660  | 4380   | 47   |
|    | 540/65 R 30 | 150 D               | 2,4                              | DW16L   | 540  | 1460   | 660  | 4380   | 47   |
| 34 | 540/65 R 34 | 145 D               | 1,6                              | DW16L   | 540  | 1575   | 715  | 4695   | 48   |
|    | 540/65 R 34 | 152 D               | 2,4                              | DW16L   | 540  | 1575   | 715  | 4695   | 48   |
|    | 600/65 R 34 | 151 D               | 1,6                              | DW18L   | 595  | 1640   | 740  | 4905   | 49   |
| 38 | 540/65 R 38 | 147 D               | 1,6                              | DW16L   | 545  | 1685   | 770  | 5020   | 49   |
|    | 600/65 R 38 | 153 D               | 1,6                              | DW18L   | 595  | 1750   | 790  | 5210   | 50   |
|    | 650/65 R 38 | 157 D               | 1,6                              | DW20B   | 650  | 1840   | 830  | 5480   | 50   |
| 42 | 650/65 R 42 | 158 D               | 1,6                              | DW20B   | 650  | 1925   | 880  | 5740   | 51   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 320/65 R 16 117 D TL Traxion 65

|                       |     |                            |      |                        |      |         |      |      |      |      |      |      |      |
|-----------------------|-----|----------------------------|------|------------------------|------|---------|------|------|------|------|------|------|------|
| EAN                   |     | 8714692344688              |      | Section width          |      | 320 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      | Overall diameter       |      | 825 mm  |      |      |      |      |      |      |      |
| Tyre construction     |     | Radial                     |      | Static loaded radius   |      | 370 mm  |      |      |      |      |      |      |      |
| Recommended rim width |     | W10                        |      | Rolling circumference  |      | 2455 mm |      |      |      |      |      |      |      |
| Permitted rim width   |     | W9, W11                    |      | SRI                    |      | 390     |      |      |      |      |      |      |      |
|                       |     |                            |      | Tread depth            |      | 31 mm   |      |      |      |      |      |      |      |
|                       |     |                            |      | 75% of the tyre volume |      | 50 l    |      |      |      |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |                        |      |         |      |      |      |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00                   | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |                        |      |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L | 805                        | 915  | 1030                   | 1140 | 1250    | 1340 | 1415 | 1515 | 1640 | 1755 | 1855 | 1930 |
|                       | 10H | 670                        | 775  | 885                    | 990  | 1060    | 1120 | 1230 | 1330 | 1415 | 1480 |      |      |
|                       | 25  | 690                        | 800  | 910                    | 1020 | 1095    | 1155 | 1265 | 1375 | 1460 | 1525 |      |      |
|                       | 30  | 670                        | 775  | 885                    | 990  | 1060    | 1120 | 1230 | 1330 | 1415 | 1480 |      |      |
|                       | 40  |                            | 740  | 840                    | 940  | 1010    | 1070 | 1170 | 1270 | 1345 | 1405 |      |      |
|                       | 50  |                            | 710  | 805                    | 900  | 970     | 1025 | 1125 | 1215 | 1290 | 1350 |      |      |
|                       | 65  |                            |      | 770                    | 860  | 925     | 975  | 1070 | 1160 | 1230 | 1285 |      |      |
| 70                    |     |                            | 700  | 780                    | 840  | 885     | 975  | 1055 | 1120 | 1170 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 320/65 R 18 119 D TL Traxion 65

|                       |     |                            |      |                        |      |         |      |      |      |      |      |      |      |
|-----------------------|-----|----------------------------|------|------------------------|------|---------|------|------|------|------|------|------|------|
| EAN                   |     | 8714692344695              |      | Section width          |      | 310 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      | Overall diameter       |      | 875 mm  |      |      |      |      |      |      |      |
| Tyre construction     |     | Radial                     |      | Static loaded radius   |      | 390 mm  |      |      |      |      |      |      |      |
| Recommended rim width |     | W9                         |      | Rolling circumference  |      | 2605 mm |      |      |      |      |      |      |      |
| Permitted rim width   |     | W10, W11                   |      | SRI                    |      | 425     |      |      |      |      |      |      |      |
|                       |     |                            |      | Tread depth            |      | 31 mm   |      |      |      |      |      |      |      |
|                       |     |                            |      | 75% of the tyre volume |      | 53 l    |      |      |      |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |                        |      |         |      |      |      |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00                   | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |                        |      |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L | 850                        | 965  | 1085                   | 1200 | 1320    | 1410 | 1490 | 1600 | 1725 | 1850 | 1955 | 2040 |
|                       | 10H | 705                        | 820  | 930                    | 1040 | 1120    | 1185 | 1295 | 1405 | 1490 | 1565 |      |      |
|                       | 25  | 725                        | 845  | 960                    | 1075 | 1155    | 1220 | 1335 | 1450 | 1535 | 1610 |      |      |
|                       | 30  | 705                        | 820  | 930                    | 1040 | 1120    | 1185 | 1295 | 1405 | 1490 | 1565 |      |      |
|                       | 40  |                            | 780  | 885                    | 990  | 1065    | 1130 | 1235 | 1340 | 1420 | 1490 |      |      |
|                       | 50  |                            | 750  | 850                    | 950  | 1020    | 1080 | 1185 | 1285 | 1360 | 1430 |      |      |
|                       | 65  |                            |      | 810                    | 905  | 975     | 1030 | 1130 | 1220 | 1295 | 1360 |      |      |
| 70                    |     |                            | 735  | 825                    | 885  | 935     | 1025 | 1110 | 1180 | 1240 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 340/65 R 18 122 D TL Traxion 65

|                       |               |     |                            |         |      |      |      |      |      |      |      |      |      |      |
|-----------------------|---------------|-----|----------------------------|---------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692344732 |     | Section width              | 320 mm  |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,4 bar       |     | Overall diameter           | 905 mm  |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial        |     | Static loaded radius       | 415 mm  |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | W9            |     | Rolling circumference      | 2700 mm |      |      |      |      |      |      |      |      |      |      |
| Permitted rim width   | W10, W11      |     | SRI                        | 425     |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | Tread depth                | 33 mm   |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | 75% of the tyre volume     | 61 l    |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |               |     | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 935 | 1060                       | 1190    | 1315 | 1445 | 1550 | 1640 | 1755 | 1895 | 2035 | 2145 | 2250 |      |
|                       | 10H           | 775 | 900                        | 1025    | 1145 | 1230 | 1325 | 1425 | 1545 | 1640 | 1725 |      |      |      |
|                       | 25            | 800 | 925                        | 1055    | 1180 | 1265 | 1365 | 1470 | 1590 | 1690 | 1780 |      |      |      |
|                       | 30            | 775 | 900                        | 1025    | 1145 | 1230 | 1325 | 1425 | 1545 | 1640 | 1725 |      |      |      |
|                       | 40            |     | 855                        | 975     | 1090 | 1170 | 1260 | 1355 | 1470 | 1560 | 1645 |      |      |      |
|                       | 50            |     | 820                        | 935     | 1045 | 1120 | 1210 | 1300 | 1410 | 1495 | 1575 |      |      |      |
|                       | 65            |     |                            | 890     | 995  | 1070 | 1150 | 1240 | 1340 | 1425 | 1500 |      |      |      |
|                       | 70            |     |                            | 810     | 905  | 975  | 1045 | 1125 | 1220 | 1295 | 1365 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 420/65 R 20 135 D TL Traxion 65

|                       |               |      |                            |         |      |      |      |      |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692344794 |      | Section width              | 415 mm  |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,4 bar       |      | Overall diameter           | 1055 mm |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 480 mm  |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | W13           |      | Rolling circumference      | 3165 mm |      |      |      |      |      |      |      |      |      |      |
| Permitted rim width   | W11, W12      |      | SRI                        | 500     |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | Tread depth                | 36 mm   |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | 75% of the tyre volume     | 116 l   |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 1360 | 1545                       | 1735    | 1920 | 2105 | 2255 | 2385 | 2560 | 2760 | 2960 | 3125 | 3270 |      |
|                       | 10H           | 1130 | 1310                       | 1490    | 1665 | 1790 | 1895 | 2075 | 2245 | 2385 | 2505 |      |      |      |
|                       | 25            | 1165 | 1350                       | 1535    | 1715 | 1845 | 1955 | 2135 | 2315 | 2460 | 2585 |      |      |      |
|                       | 30            | 1130 | 1310                       | 1490    | 1665 | 1790 | 1895 | 2075 | 2245 | 2385 | 2505 |      |      |      |
|                       | 40            |      | 1245                       | 1420    | 1585 | 1705 | 1805 | 1975 | 2140 | 2270 | 2385 |      |      |      |
|                       | 50            |      | 1195                       | 1360    | 1520 | 1635 | 1735 | 1895 | 2050 | 2180 | 2290 |      |      |      |
|                       | 65            |      |                            | 1295    | 1450 | 1555 | 1650 | 1805 | 1955 | 2075 | 2180 |      |      |      |
|                       | 70            |      |                            | 1180    | 1320 | 1415 | 1500 | 1640 | 1780 | 1885 | 1985 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 440/65 R 24 128 D TL Traxion 65

|                       |     |                            |      |      |      |                       |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|-----------------------|------|---------|------|
| EAN                   |     | 8714692360466              |      |      |      | Section width         |      | 440 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter      |      | 1185 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius  |      | 540 mm  |      |
| Recommended rim width |     | DW14L                      |      |      |      | Rolling circumference |      | 3545 mm |      |
| Permitted rim width   |     | W/DW13(L), W14L            |      |      |      | SRI                   |      | 575     |      |
| EAN Tube              |     | 8714692239748              |      |      |      | Tread depth           |      | 40 mm   |      |
|                       |     | 75% of the tyre volume     |      |      |      |                       |      |         |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                       |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                  | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                       |      |         |      |
| Speed (km/h)          | 10L | 1505                       | 1705 | 1915 | 2120 | 2325                  | 2490 | 2625    | 2785 |
|                       | 10H | 1245                       | 1445 | 1645 | 1815 | 1955                  | 2070 |         |      |
|                       | 25  | 1285                       | 1490 | 1695 | 1870 | 2015                  | 2135 |         |      |
|                       | 30  | 1245                       | 1445 | 1645 | 1815 | 1955                  | 2070 |         |      |
|                       | 40  |                            | 1375 | 1565 | 1725 | 1865                  | 1970 |         |      |
|                       | 50  |                            | 1320 | 1500 | 1655 | 1785                  | 1890 |         |      |
|                       | 65  |                            |      | 1430 | 1575 | 1700                  | 1800 |         |      |
|                       | 70  |                            |      | 1300 | 1435 | 1550                  | 1640 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 480/65 R 24 133 D TL Traxion 65

|                       |     |                            |      |      |      |                       |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|-----------------------|------|---------|------|
| EAN                   |     | 8714692360473              |      |      |      | Section width         |      | 485 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter      |      | 1250 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius  |      | 570 mm  |      |
| Recommended rim width |     | DW15L                      |      |      |      | Rolling circumference |      | 3735 mm |      |
| Permitted rim width   |     | W/DW14, W15L               |      |      |      | SRI                   |      | 600     |      |
| EAN Tube              |     | 8714692239755              |      |      |      | Tread depth           |      | 42 mm   |      |
|                       |     | 75% of the tyre volume     |      |      |      |                       |      |         |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                       |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                  | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                       |      |         |      |
| Speed (km/h)          | 10L | 1720                       | 1950 | 2190 | 2425 | 2660                  | 2850 | 3005    | 3190 |
|                       | 10H | 1425                       | 1655 | 1880 | 2075 | 2240                  | 2370 |         |      |
|                       | 25  | 1470                       | 1705 | 1940 | 2140 | 2310                  | 2440 |         |      |
|                       | 30  | 1425                       | 1655 | 1880 | 2075 | 2240                  | 2370 |         |      |
|                       | 40  |                            | 1575 | 1790 | 1975 | 2135                  | 2255 |         |      |
|                       | 50  |                            | 1510 | 1720 | 1895 | 2045                  | 2165 |         |      |
|                       | 65  |                            |      | 1635 | 1805 | 1950                  | 2060 |         |      |
|                       | 70  |                            |      | 1490 | 1640 | 1775                  | 1875 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 540/65 R 24 140 D TL Traxion 65

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360480              |      |      |      | Section width          |      | 540 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1315 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 590 mm  |      |
| Recommended rim width |     | DW16L                      |      |      |      | Rolling circumference  |      | 3920 mm |      |
| Permitted rim width   |     | W/DW15L, W16L,<br>W/DW18L  |      |      |      | SRI                    |      | 625     |      |
|                       |     |                            |      |      |      | Tread depth            |      | 46 mm   |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 260 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 2070                       | 2350 | 2635 | 2915 | 3200                   | 3425 | 3615    | 3835 |
|                       | 10H | 1715                       | 1990 | 2265 | 2495 | 2695                   | 2875 |         |      |
|                       | 25  | 1770                       | 2050 | 2330 | 2575 | 2775                   | 2965 |         |      |
|                       | 30  | 1715                       | 1990 | 2265 | 2495 | 2695                   | 2875 |         |      |
|                       | 40  |                            | 1895 | 2155 | 2375 | 2565                   | 2740 |         |      |
|                       | 50  |                            | 1820 | 2065 | 2280 | 2460                   | 2625 |         |      |
|                       | 65  |                            |      | 1970 | 2170 | 2345                   | 2500 |         |      |
|                       | 70  |                            |      | 1790 | 1975 | 2130                   | 2275 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 440/65 R 28 131 D TL Traxion 65

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360497              |      |      |      | Section width          |      | 440 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1290 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 590 mm  |      |
| Recommended rim width |     | DW14L                      |      |      |      | Rolling circumference  |      | 3870 mm |      |
| Permitted rim width   |     | W13, W14L,<br>W/DW15L      |      |      |      | SRI                    |      | 625     |      |
|                       |     |                            |      |      |      | Tread depth            |      | 40 mm   |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 180 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 1615                       | 1830 | 2055 | 2275 | 2500                   | 2675 | 2820    | 2995 |
|                       | 10H | 1340                       | 1555 | 1765 | 1950 | 2105                   | 2245 |         |      |
|                       | 25  | 1380                       | 1600 | 1820 | 2005 | 2165                   | 2310 |         |      |
|                       | 30  | 1340                       | 1555 | 1765 | 1950 | 2105                   | 2245 |         |      |
|                       | 40  |                            | 1480 | 1680 | 1855 | 2000                   | 2135 |         |      |
|                       | 50  |                            | 1420 | 1615 | 1780 | 1920                   | 2050 |         |      |
|                       | 65  |                            |      | 1535 | 1695 | 1830                   | 1950 |         |      |
|                       | 70  |                            |      | 1400 | 1540 | 1665                   | 1775 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 480/65 R 28 136 D TL Traxion 65

|                       |     |                            |      |      |      |                       |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|-----------------------|------|---------|------|
| EAN                   |     | 8714692360503              |      |      |      | Section width         |      | 485 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter      |      | 1350 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius  |      | 610 mm  |      |
| Recommended rim width |     | DW15L                      |      |      |      | Rolling circumference |      | 4015 mm |      |
| Permitted rim width   |     | W/DW14, W15L               |      |      |      | SRI                   |      | 650     |      |
| EAN Tube              |     | 8714692239793              |      |      |      | Tread depth           |      | 42 mm   |      |
|                       |     | 75% of the tyre volume     |      |      |      |                       |      |         |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                       |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                  | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                       |      |         |      |
| Speed (km/h)          | 10L | 1845                       | 2095 | 2350 | 2600 | 2855                  | 3055 | 3225    | 3420 |
|                       | 10H | 1530                       | 1775 | 2020 | 2225 | 2400                  | 2575 |         |      |
|                       | 25  | 1575                       | 1830 | 2080 | 2295 | 2475                  | 2655 |         |      |
|                       | 30  | 1530                       | 1775 | 2020 | 2225 | 2400                  | 2575 |         |      |
|                       | 40  |                            | 1690 | 1920 | 2120 | 2285                  | 2455 |         |      |
|                       | 50  |                            | 1620 | 1840 | 2030 | 2195                  | 2350 |         |      |
|                       | 65  |                            |      | 1755 | 1935 | 2090                  | 2240 |         |      |
|                       | 70  |                            |      | 1595 | 1760 | 1900                  | 2040 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 540/65 R 28 142 D TL Traxion 65

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360510              |      |      |      | Section width          |      | 540 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1410 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 635 mm  |      |
| Recommended rim width |     | DW16L                      |      |      |      | Rolling circumference  |      | 4210 mm |      |
| Permitted rim width   |     | W/DW15L#, W16L,            |      |      |      | SRI                    |      | 675     |      |
|                       |     | W/DW18L                    |      |      |      | Tread depth            |      | 46 mm   |      |
| EAN Tube              |     | 8714692239809              |      |      |      | 75% of the tyre volume |      | 285 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 2215                       | 2510 | 2820 | 3120 | 3425                   | 3665 | 3865    | 4105 |
|                       | 10H | 1835                       | 2130 | 2420 | 2670 | 2880                   | 3045 |         |      |
|                       | 25  | 1890                       | 2195 | 2495 | 2750 | 2970                   | 3140 |         |      |
|                       | 30  | 1835                       | 2130 | 2420 | 2670 | 2880                   | 3045 |         |      |
|                       | 40  |                            | 2030 | 2305 | 2540 | 2745                   | 2900 |         |      |
|                       | 50  |                            | 1945 | 2210 | 2440 | 2630                   | 2785 |         |      |
|                       | 65  |                            |      | 2105 | 2320 | 2505                   | 2650 |         |      |
|                       | 70  |                            |      | 1915 | 2115 | 2280                   | 2410 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 540/65 R 30 143 D TL Traxion 65

|                       |                 |      |                            |         |      |      |      |      |      |      |  |  |  |
|-----------------------|-----------------|------|----------------------------|---------|------|------|------|------|------|------|--|--|--|
| EAN                   | 8714692360527   |      | Section width              | 540 mm  |      |      |      |      |      |      |  |  |  |
| Nominal tyre pressure | 1,6 bar         |      | Overall diameter           | 1460 mm |      |      |      |      |      |      |  |  |  |
| Tyre construction     | Radial          |      | Static loaded radius       | 660 mm  |      |      |      |      |      |      |  |  |  |
| Recommended rim width | DW16L           |      | Rolling circumference      | 4380 mm |      |      |      |      |      |      |  |  |  |
| Permitted rim width   | W/DW15L*, W16L, |      | SRI                        | 700     |      |      |      |      |      |      |  |  |  |
|                       | W/DW18L         |      | Tread depth                | 46 mm   |      |      |      |      |      |      |  |  |  |
| EAN Tube              | 8714692331381   |      | 75% of the tyre volume     | 305 l   |      |      |      |      |      |      |  |  |  |
|                       |                 |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |  |  |  |
|                       |                 |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |  |  |  |
|                       |                 |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |  |  |  |
| Speed (km/h)          | 10L             | 2285 | 2590                       | 2905    | 3215 | 3530 | 3780 | 3990 | 4235 |      |  |  |  |
|                       | 10H             | 1895 | 2195                       | 2495    | 2755 | 2975 | 3135 |      |      |      |  |  |  |
|                       | 25              | 1950 | 2265                       | 2575    | 2840 | 3065 | 3230 |      |      |      |  |  |  |
|                       | 30              | 1895 | 2195                       | 2495    | 2755 | 2975 | 3135 |      |      |      |  |  |  |
|                       | 40              | 2090 |                            | 2380    | 2620 | 2830 | 2985 |      |      |      |  |  |  |
|                       | 50              | 2005 |                            | 2280    | 2515 | 2715 | 2860 |      |      |      |  |  |  |
|                       | 65              |      |                            | 2170    | 2395 | 2585 | 2725 |      |      |      |  |  |  |
|                       | 70              |      |                            | 1975    | 2180 | 2350 | 2480 |      |      |      |  |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 540/65 R 30 150 D TL Traxion 65

|                       |                |      |                            |         |      |      |      |      |      |      |      |      |      |      |
|-----------------------|----------------|------|----------------------------|---------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692360534  |      | Section width              | 540 mm  |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,4 bar        |      | Overall diameter           | 1460 mm |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial         |      | Static loaded radius       | 660 mm  |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | DW16L          |      | Rolling circumference      | 4380 mm |      |      |      |      |      |      |      |      |      |      |
| Permitted rim width   | W/DW15L*,W16L, |      | SRI                        | 700     |      |      |      |      |      |      |      |      |      |      |
|                       | W/DW18L        |      | Tread depth                | 46 mm   |      |      |      |      |      |      |      |      |      |      |
| EAN Tube              | 8714692331381  |      | 75% of the tyre volume     | 305 l   |      |      |      |      |      |      |      |      |      |      |
|                       |                |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |      |      |      |
|                       |                |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |                |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L            | 2285 | 2590                       | 2905    | 3215 | 3530 | 3780 | 3990 | 4235 | 4415 | 4620 | 4825 | 5025 |      |
|                       | 10H            | 1895 | 2195                       | 2495    | 2755 | 2975 | 3135 | 3355 | 3525 | 3670 | 3850 |      |      |      |
|                       | 25             | 1950 | 2265                       | 2575    | 2840 | 3065 | 3230 | 3460 | 3630 | 3785 | 3970 |      |      |      |
|                       | 30             | 1895 | 2195                       | 2495    | 2755 | 2975 | 3135 | 3355 | 3525 | 3670 | 3850 |      |      |      |
|                       | 40             | 2090 |                            | 2380    | 2620 | 2830 | 2985 | 3195 | 3355 | 3495 | 3670 |      |      |      |
|                       | 50             | 2005 |                            | 2280    | 2515 | 2715 | 2860 | 3065 | 3215 | 3355 | 3520 |      |      |      |
|                       | 65             |      |                            | 2170    | 2395 | 2585 | 2725 | 2920 | 3065 | 3195 | 3350 |      |      |      |
|                       | 70             |      |                            | 1975    | 2180 | 2350 | 2480 | 2655 | 2790 | 2905 | 3050 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 540/65 R 34 145 D TL Traxion 65

|                       |     |                            |      |      |      |                        |      |         |      |  |  |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|--|
| EAN                   |     | 8714692360541              |      |      |      | Section width          |      | 540 mm  |      |  |  |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1575 mm |      |  |  |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 715 mm  |      |  |  |
| Recommended rim width |     | DW16L                      |      |      |      | Rolling circumference  |      | 4695 mm |      |  |  |
| Permitted rim width   |     | W/DW15L#, W16L,<br>W/DW18L |      |      |      | SRI                    |      | 750     |      |  |  |
|                       |     |                            |      |      |      | Tread depth            |      | 46 mm   |      |  |  |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 330 l   |      |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |  |
| Speed (km/h)          | 10L | 2420                       | 2745 | 3080 | 3410 | 3745                   | 4005 | 4225    | 4485 |  |  |
|                       | 10H | 2005                       | 2330 | 2645 | 2920 | 3150                   | 3335 |         |      |  |  |
|                       | 25  | 2070                       | 2400 | 2725 | 3010 | 3245                   | 3435 |         |      |  |  |
|                       | 30  | 2005                       | 2330 | 2645 | 2920 | 3150                   | 3335 |         |      |  |  |
|                       | 40  |                            | 2220 | 2520 | 2780 | 3000                   | 3175 |         |      |  |  |
|                       | 50  |                            | 2125 | 2415 | 2665 | 2875                   | 3045 |         |      |  |  |
|                       | 65  |                            |      | 2300 | 2540 | 2740                   | 2900 |         |      |  |  |
| 70                    |     |                            | 2095 | 2310 | 2495 | 2640                   |      |         |      |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 540/65 R 34 152 D TL Traxion 65

|                       |     |                            |      |      |      |                        |      |         |      |      |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|------|------|
| EAN                   |     | 8714692360558              |      |      |      | Section width          |      | 540 mm  |      |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      | Overall diameter       |      | 1575 mm |      |      |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 715 mm  |      |      |      |      |      |
| Recommended rim width |     | DW16L                      |      |      |      | Rolling circumference  |      | 4695 mm |      |      |      |      |      |
| Permitted rim width   |     | W/DW15L#, W16L,<br>W/DW18L |      |      |      | SRI                    |      | 750     |      |      |      |      |      |
|                       |     |                            |      |      |      | Tread depth            |      | 46 mm   |      |      |      |      |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 330 l   |      |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |      |      |
| Speed (km/h)          | 10L | 2420                       | 2745 | 3080 | 3410 | 3745                   | 4005 | 4225    | 4485 | 4680 | 4895 | 5115 | 5325 |
|                       | 10H | 2005                       | 2330 | 2645 | 2920 | 3150                   | 3335 | 3560    | 3735 | 3890 | 4080 |      |      |
|                       | 25  | 2070                       | 2400 | 2725 | 3010 | 3245                   | 3435 | 3665    | 3850 | 4010 | 4205 |      |      |
|                       | 30  | 2005                       | 2330 | 2645 | 2920 | 3150                   | 3335 | 3560    | 3735 | 3890 | 4080 |      |      |
|                       | 40  |                            | 2220 | 2520 | 2780 | 3000                   | 3175 | 3390    | 3555 | 3705 | 3885 |      |      |
|                       | 50  |                            | 2125 | 2415 | 2665 | 2875                   | 3045 | 3250    | 3410 | 3555 | 3730 |      |      |
|                       | 65  |                            |      | 2300 | 2540 | 2740                   | 2900 | 3095    | 3250 | 3385 | 3550 |      |      |
| 70                    |     |                            | 2095 | 2310 | 2495 | 2640                   | 2815 | 2955    | 3080 | 3230 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# TRACTOR TYRES DRIVE RADIAL

## 600/65 R 34 151 D TL Traxion 65

|                       |               |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360565 | Section width              | 595 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar       | Overall diameter           | 1640 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 740 mm  |      |      |      |      |      |      |
| Recommended rim width | DW18L         | Rolling circumference      | 4905 mm |      |      |      |      |      |      |
| Permitted rim width   | W18L, DW20B   | SRI                        | 775     |      |      |      |      |      |      |
| EAN Tube              | 8714692331411 | Tread depth                | 53 mm   |      |      |      |      |      |      |
|                       |               | 75% of the tyre volume     | 425 l   |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 2845                       | 3225    | 3620 | 4005 | 4400 | 4710 | 4970 | 5275 |
|                       | 10H           | 2360                       | 2735    | 3110 | 3430 | 3705 | 3965 |      |      |
|                       | 25            | 2430                       | 2820    | 3205 | 3535 | 3815 | 4090 |      |      |
|                       | 30            | 2360                       | 2735    | 3110 | 3430 | 3705 | 3965 |      |      |
|                       | 40            |                            | 2605    | 2960 | 3265 | 3525 | 3780 |      |      |
|                       | 50            |                            | 2500    | 2840 | 3135 | 3380 | 3625 |      |      |
|                       | 65            |                            |         | 2705 | 2985 | 3220 | 3450 |      |      |
|                       | 70            |                            |         | 2460 | 2715 | 2930 | 3140 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 540/65 R 38 147 D TL Traxion 65

|                       |               |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360572 | Section width              | 545 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar       | Overall diameter           | 1685 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 770 mm  |      |      |      |      |      |      |
| Recommended rim width | DW16L         | Rolling circumference      | 5020 mm |      |      |      |      |      |      |
| Permitted rim width   | W16L, W/DW18L | SRI                        | 800     |      |      |      |      |      |      |
| EAN Tube              | 8714692331459 | Tread depth                | 46 mm   |      |      |      |      |      |      |
|                       |               | 75% of the tyre volume     | 365 l   |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 2555                       | 2895    | 3250 | 3595 | 3950 | 4225 | 4460 | 4735 |
|                       | 10H           | 2120                       | 2455    | 2790 | 3080 | 3325 | 3535 |      |      |
|                       | 25            | 2180                       | 2530    | 2875 | 3175 | 3425 | 3645 |      |      |
|                       | 30            | 2120                       | 2455    | 2790 | 3080 | 3325 | 3535 |      |      |
|                       | 40            |                            | 2340    | 2660 | 2935 | 3165 | 3365 |      |      |
|                       | 50            |                            | 2245    | 2550 | 2810 | 3035 | 3230 |      |      |
|                       | 65            |                            |         | 2430 | 2680 | 2890 | 3075 |      |      |
|                       | 70            |                            |         | 2210 | 2435 | 2630 | 2800 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 600/65 R 38 153 D TL Traxion 65

|                       |     |                            |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692360589              |      | Section width          |      | 595 mm  |      |      |      |
| Nominal tyre pressure |     | 1,6 bar                    |      | Overall diameter       |      | 1750 mm |      |      |      |
| Tyre construction     |     | Radial                     |      | Static loaded radius   |      | 790 mm  |      |      |      |
| Recommended rim width |     | DW18L                      |      | Rolling circumference  |      | 5210 mm |      |      |      |
| Permitted rim width   |     | W18L, DW20B                |      | SRI                    |      | 825     |      |      |      |
| EAN Tube              |     | 8714692331466              |      | Tread depth            |      | 53 mm   |      |      |      |
|                       |     |                            |      | 75% of the tyre volume |      | 455 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00                   | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 2995                       | 3400 | 3815                   | 4220 | 4635    | 4960 | 5235 | 5555 |
|                       | 10H | 2485                       | 2885 | 3275                   | 3615 | 3900    | 4200 |      |      |
|                       | 25  | 2560                       | 2970 | 3375                   | 3725 | 4020    | 4325 |      |      |
|                       | 30  | 2485                       | 2885 | 3275                   | 3615 | 3900    | 4200 |      |      |
|                       | 40  |                            | 2745 | 3120                   | 3440 | 3715    | 3995 |      |      |
|                       | 50  |                            | 2635 | 2990                   | 3300 | 3560    | 3835 |      |      |
|                       | 65  |                            |      | 2850                   | 3145 | 3390    | 3650 |      |      |
|                       | 70  |                            |      | 2595                   | 2860 | 3085    | 3320 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/65 R 38 157 D TL Traxion 65

|                       |     |                            |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692360596              |      | Section width          |      | 650 mm  |      |      |      |
| Nominal tyre pressure |     | 1,6 bar                    |      | Overall diameter       |      | 1840 mm |      |      |      |
| Tyre construction     |     | Radial                     |      | Static loaded radius   |      | 830 mm  |      |      |      |
| Recommended rim width |     | DW20B                      |      | Rolling circumference  |      | 5480 mm |      |      |      |
| Permitted rim width   |     | W/DW18L#                   |      | SRI                    |      | 875     |      |      |      |
| EAN Tube              |     | 8714692331473              |      | Tread depth            |      | 55 mm   |      |      |      |
|                       |     |                            |      | 75% of the tyre volume |      | 575 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00                   | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 3385                       | 3840 | 4310                   | 4770 | 5240    | 5605 | 5915 | 6280 |
|                       | 10H | 2810                       | 3260 | 3705                   | 4085 | 4410    | 4745 |      |      |
|                       | 25  | 2895                       | 3360 | 3815                   | 4210 | 4545    | 4890 |      |      |
|                       | 30  | 2810                       | 3260 | 3705                   | 4085 | 4410    | 4745 |      |      |
|                       | 40  |                            | 3105 | 3525                   | 3890 | 4200    | 4515 |      |      |
|                       | 50  |                            | 2975 | 3380                   | 3730 | 4025    | 4330 |      |      |
|                       | 65  |                            |      | 3220                   | 3550 | 3835    | 4125 |      |      |
|                       | 70  |                            |      | 2930                   | 3235 | 3490    | 3755 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 650/65 R 42 158 D TL Traxion 65

|                       |               |      |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360602 |      | Section width              | 650 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar       |      | Overall diameter           | 1925 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 880 mm  |      |      |      |      |      |      |
| Recommended rim width | DW20B         |      | Rolling circumference      | 5740 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW18L#      |      | SRI                        | 925     |      |      |      |      |      |      |
|                       |               |      | Tread depth                | 55 mm   |      |      |      |      |      |      |
|                       |               |      | 75% of the tyre volume     | 620 l   |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 3550 | 4025                       | 4520    | 5000 | 5490 | 5875 | 6200 | 6580 |      |
|                       | 10H           | 2945 | 3415                       | 3885    | 4280 | 4620 | 4890 |      |      |      |
|                       | 25            | 3035 | 3520                       | 4000    | 4415 | 4765 | 5035 |      |      |      |
|                       | 30            | 2945 | 3415                       | 3885    | 4280 | 4620 | 4890 |      |      |      |
|                       | 40            |      | 3255                       | 3695    | 4075 | 4400 | 4655 |      |      |      |
|                       | 50            |      | 3120                       | 3545    | 3910 | 4220 | 4465 |      |      |      |
|                       | 65            |      |                            | 3375    | 3725 | 4020 | 4250 |      |      |      |
|                       | 70            |      |                            | 3070    | 3390 | 3655 | 3870 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL



## TRAXION 70

HIGHEST PRODUCTIVITY FOR  
MODERN HIGH-TECH TRACTORS

### FEATURES

Extra-large contact area in the centre

Widely spaced cleats in the shoulder

Genuine tread width

### BENEFITS

Longest lifespan




Excellent self-cleaning, highest traction

Large footprint, maximum traction



# TRAXION 70



| Ø  | Tyre size   | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |   |
|----|-------------|---------------------|----------------------------------|---|--|--|--|--|------|---|
| 16 | 240/70 R 16 | 104 D               | 2,4                              | W8  | 245  | 735  | 335  | 2190   | 54   |   |
|    | 260/70 R 16 | 109 D               | 2,4                              | W8  | 260  | 765  | 345  | 2280   | 54   |   |
|    | 280/70 R 16 | 112 D               | 2,4                              | W9  | 280  | 800  | 365  | 2390   | 55   |   |
| 18 | 280/70 R 18 | 114 D               | 2,4                              | W9  | 275  | 850  | 385  | 2540   | 55   |   |
| 20 | 260/70 R 20 | 113 D               | 2,4                              | W8  | 265  | 880  | 390  | 2620   | 56   |   |
|    | 280/70 R 20 | 116 D               | 2,4                              | W9  | 280  | 910  | 415  | 2715   | 56   |   |
|    | 300/70 R 20 | 120 D               | 2,4                              | W9  | 295  | 945  | 439  | 2815   | 57   |   |
|    | 320/70 R 20 | 123 D               | 2,4                              | W10   | 320  | 985  | 450  | 2935   | 57   |   |
|    | 360/70 R 20 | 129 D               | 2,4                              | W11   | 360  | 1045   | 479  | 3115   | 58   |   |
|    | 380/70 R 20 | 132 D               | 2,4                              | W12   | 390  | 1070   | 490  | 3190   | 58   |   |
| 24 | 320/70 R 24 | 116 D               | 1,6                              | W10   | 325  | 1100   | 505  | 3245   | 59   | N |
|    | 360/70 R 24 | 122 D               | 1,6                              | W11   | 360  | 1150   | 525  | 3395   | 59   | N |
|    | 380/70 R 24 | 125 D               | 1,6                              | W12   | 385  | 1185   | 540  | 3495   | 60   | N |
|    | 420/70 R 24 | 130 D               | 1,6                              | W13   | 430  | 1240   | 560  | 3675   | 60   | N |
|    | 480/70 R 24 | 138 D               | 1,6                              | DW15L   | 490  | 1305   | 585  | 3850   | 61   | N |
| 28 | 380/70 R 28 | 127 D               | 1,6                              | W12   | 390  | 1290   | 590  | 3825   | 61   | N |
|    | 420/70 R 28 | 133 D               | 1,6                              | W13   | 430  | 1345   | 615  | 3975   | 62   | N |
|    | 480/70 R 28 | 140 D               | 1,6                              | DW15L   | 495  | 1405   | 635  | 4155   | 62   | N |
| 30 | 480/70 R 30 | 141 D               | 1,6                              | DW15L   | 490  | 1470   | 665  | 4370   | 63   | N |
| 34 | 480/70 R 34 | 143 D               | 1,6                              | DW15L   | 485  | 1575   | 715  | 4645   | 63   | N |
|    | 520/70 R 34 | 148 D               | 1,6                              | DW16L   | 525  | 1640   | 740  | 4840   | 64   | N |
| 38 | 480/70 R 38 | 145 D               | 1,6                              | DW15L   | 485  | 1685   | 765  | 5015   | 64   | N |
|    | 520/70 R 38 | 150 D               | 1,6                              | DW16L   | 540  | 1750   | 790  | 5165   | 65   | N |
|    | 580/70 R 38 | 155 D               | 1,6                              | DW18L   | 595  | 1825   | 820  | 5385   | 65   | N |
| 42 | 620/70 R 42 | 166 D               | 2,4                              | DW20B   | 625  | 1930   | 885  | 5750   | 66   | N |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES

## DRIVE RADIAL

### 240/70 R 16 104 D TL Traxion 70

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692344602              |      |      |      |      |      | Section width          |      | 245 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 735 mm  |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 335 mm  |      |      |      |
| Recommended rim width |     | W8                         |      |      |      |      |      | Rolling circumference  |      | 2190 mm |      |      |      |
| Permitted rim width   |     | W8L, W9                    |      |      |      |      |      | SRI                    |      | 350     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 29 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 26 l    |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 550                        | 625  | 705  | 780  | 855  | 915  | 970                    | 1025 | 1120    | 1200 | 1270 | 1350 |
|                       | 10H | 460                        | 530  | 605  | 675  | 725  | 770  | 840                    | 910  | 970     | 1035 |      |      |
|                       | 25  | 470                        | 550  | 625  | 695  | 750  | 795  | 870                    | 940  | 1000    | 1065 |      |      |
|                       | 30  | 460                        | 530  | 605  | 675  | 725  | 770  | 840                    | 910  | 970     | 1035 |      |      |
|                       | 40  |                            | 505  | 575  | 645  | 690  | 735  | 800                    | 870  | 920     | 985  |      |      |
|                       | 50  |                            | 485  | 550  | 620  | 665  | 705  | 770                    | 835  | 885     | 945  |      |      |
|                       | 65  |                            |      | 525  | 590  | 630  | 670  | 730                    | 795  | 840     | 900  |      |      |
| 70                    |     |                            | 480  | 535  | 575  | 610  | 665  | 720                    | 765  | 820     |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

### 260/70 R 16 109 D TL Traxion 70

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692344619              |      |      |      |      |      | Section width          |      | 260 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 765 mm  |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 345 mm  |      |      |      |
| Recommended rim width |     | W8                         |      |      |      |      |      | Rolling circumference  |      | 2280 mm |      |      |      |
| Permitted rim width   |     | W8L, W9                    |      |      |      |      |      | SRI                    |      | 370     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 31 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 31 l    |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 630                        | 715  | 805  | 890  | 980  | 1050 | 1110                   | 1175 | 1285    | 1375 | 1450 | 1545 |
|                       | 10H | 525                        | 610  | 690  | 775  | 830  | 890  | 965                    | 1045 | 1110    | 1185 |      |      |
|                       | 25  | 540                        | 625  | 715  | 800  | 855  | 920  | 995                    | 1075 | 1140    | 1220 |      |      |
|                       | 30  | 525                        | 610  | 690  | 775  | 830  | 890  | 965                    | 1045 | 1110    | 1185 |      |      |
|                       | 40  |                            | 580  | 660  | 735  | 790  | 850  | 915                    | 995  | 1055    | 1130 |      |      |
|                       | 50  |                            | 555  | 630  | 705  | 760  | 815  | 880                    | 955  | 1010    | 1080 |      |      |
|                       | 65  |                            |      | 600  | 675  | 725  | 775  | 840                    | 905  | 965     | 1030 |      |      |
| 70                    |     |                            | 545  | 610  | 660  | 705  | 760  | 825                    | 875  | 935     |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 280/70 R 16 112 D TL Traxion 70

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|--|
| EAN                   |     | 8714692344633              |      |      |      |      |      | Section width          |      | 280 mm  |      |      |      |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 800 mm  |      |      |      |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 365 mm  |      |      |      |  |
| Recommended rim width |     | W9                         |      |      |      |      |      | Rolling circumference  |      | 2390 mm |      |      |      |  |
| Permitted rim width   |     | W8, W8L, W10               |      |      |      |      |      | SRI                    |      | 390     |      |      |      |  |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 33 mm   |      |      |      |  |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 39 l    |      |      |      |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |  |
| Speed (km/h)          | 10L | 700                        | 795  | 890  | 985  | 1085 | 1160 | 1230                   | 1300 | 1420    | 1525 | 1610 | 1680 |  |
|                       | 10H | 580                        | 675  | 765  | 860  | 920  | 975  | 1065                   | 1155 | 1225    | 1290 |      |      |  |
|                       | 25  | 600                        | 695  | 790  | 885  | 950  | 1005 | 1100                   | 1190 | 1265    | 1325 |      |      |  |
|                       | 30  | 580                        | 675  | 765  | 860  | 920  | 975  | 1065                   | 1155 | 1225    | 1290 |      |      |  |
|                       | 40  |                            | 640  | 730  | 815  | 875  | 930  | 1015                   | 1100 | 1170    | 1225 |      |      |  |
|                       | 50  |                            | 615  | 700  | 785  | 840  | 895  | 975                    | 1055 | 1120    | 1175 |      |      |  |
|                       | 65  |                            |      | 665  | 745  | 800  | 850  | 930                    | 1005 | 1065    | 1120 |      |      |  |
|                       | 70  |                            |      | 605  | 680  | 730  | 775  | 845                    | 915  | 970     | 1020 |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 280/70 R 18 114 D TL Traxion 70

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|--|
| EAN                   |     | 8714692344640              |      |      |      |      |      | Section width          |      | 275 mm  |      |      |      |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 850 mm  |      |      |      |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 385 mm  |      |      |      |  |
| Recommended rim width |     | W9                         |      |      |      |      |      | Rolling circumference  |      | 2540 mm |      |      |      |  |
| Permitted rim width   |     | W8, W8L, W10               |      |      |      |      |      | SRI                    |      | 410     |      |      |      |  |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 33 mm   |      |      |      |  |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 42 l    |      |      |      |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |  |
| Speed (km/h)          | 10L | 740                        | 840  | 940  | 1040 | 1145 | 1225 | 1295                   | 1375 | 1500    | 1610 | 1695 | 1770 |  |
|                       | 10H | 615                        | 710  | 810  | 905  | 970  | 1035 | 1125                   | 1220 | 1295    | 1355 |      |      |  |
|                       | 25  | 630                        | 735  | 835  | 935  | 1000 | 1065 | 1160                   | 1260 | 1335    | 1400 |      |      |  |
|                       | 30  | 615                        | 710  | 810  | 905  | 970  | 1035 | 1125                   | 1220 | 1295    | 1355 |      |      |  |
|                       | 40  |                            | 680  | 770  | 860  | 925  | 985  | 1075                   | 1160 | 1235    | 1290 |      |      |  |
|                       | 50  |                            | 650  | 740  | 825  | 890  | 945  | 1030                   | 1115 | 1185    | 1240 |      |      |  |
|                       | 65  |                            |      | 705  | 785  | 845  | 900  | 980                    | 1060 | 1125    | 1180 |      |      |  |
|                       | 70  |                            |      | 640  | 715  | 770  | 820  | 890                    | 965  | 1025    | 1075 |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 260/70 R 20 113 D TL Traxion 70

|                       |     |                            |      |      |      |      |                        |      |         |      |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|------|------|
| EAN                   |     | 8714692344626              |      |      |      |      | Section width          |      | 265 mm  |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      | Overall diameter       |      | 880 mm  |      |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 390 mm  |      |      |      |      |
| Recommended rim width |     | W8                         |      |      |      |      | Rolling circumference  |      | 2620 mm |      |      |      |      |
| Permitted rim width   |     | W9                         |      |      |      |      | SRI                    |      | 425     |      |      |      |      |
|                       |     |                            |      |      |      |      | Tread depth            |      | 31 mm   |      |      |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 38 l    |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |      |      |
| Speed (km/h)          | 10L | 705                        | 800  | 900  | 995  | 1095 | 1170                   | 1240 | 1315    | 1435 | 1540 | 1620 | 1725 |
|                       | 10H | 585                        | 680  | 775  | 865  | 930  | 975                    | 1075 | 1165    | 1240 | 1325 |      |      |
|                       | 25  | 605                        | 700  | 795  | 890  | 960  | 1005                   | 1110 | 1200    | 1275 | 1365 |      |      |
|                       | 30  | 585                        | 680  | 775  | 865  | 930  | 975                    | 1075 | 1165    | 1240 | 1325 |      |      |
|                       | 40  |                            | 650  | 735  | 825  | 885  | 930                    | 1025 | 1110    | 1180 | 1260 |      |      |
|                       | 50  |                            | 620  | 705  | 790  | 850  | 895                    | 985  | 1065    | 1130 | 1210 |      |      |
|                       | 65  |                            |      | 675  | 755  | 810  | 850                    | 935  | 1015    | 1075 | 1150 |      |      |
| 70                    |     |                            | 610  | 685  | 735  | 775  | 850                    | 925  | 980     | 1045 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 280/70 R 20 116 D TL Traxion 70

|                       |     |                            |      |      |      |      |                        |      |         |      |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|------|------|
| EAN                   |     | 8714692344657              |      |      |      |      | Section width          |      | 280 mm  |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      | Overall diameter       |      | 910 mm  |      |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 415 mm  |      |      |      |      |
| Recommended rim width |     | W9                         |      |      |      |      | Rolling circumference  |      | 2715 mm |      |      |      |      |
| Permitted rim width   |     | W10                        |      |      |      |      | SRI                    |      | 450     |      |      |      |      |
|                       |     |                            |      |      |      |      | Tread depth            |      | 33 mm   |      |      |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 46 l    |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |      |      |
| Speed (km/h)          | 10L | 775                        | 880  | 990  | 1095 | 1205 | 1290                   | 1365 | 1445    | 1575 | 1690 | 1785 | 1875 |
|                       | 10H | 645                        | 750  | 850  | 950  | 1020 | 1095                   | 1185 | 1285    | 1360 | 1440 |      |      |
|                       | 25  | 665                        | 770  | 875  | 980  | 1055 | 1125                   | 1220 | 1320    | 1405 | 1480 |      |      |
|                       | 30  | 645                        | 750  | 850  | 950  | 1020 | 1095                   | 1185 | 1285    | 1360 | 1440 |      |      |
|                       | 40  |                            | 710  | 810  | 905  | 975  | 1040                   | 1130 | 1220    | 1295 | 1370 |      |      |
|                       | 50  |                            | 685  | 775  | 870  | 935  | 1000                   | 1080 | 1170    | 1245 | 1315 |      |      |
|                       | 65  |                            |      | 740  | 830  | 890  | 950                    | 1030 | 1115    | 1185 | 1250 |      |      |
| 70                    |     |                            | 675  | 755  | 810  | 865  | 935                    | 1015 | 1080    | 1140 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# TRACTOR TYRES DRIVE RADIAL

## 300/70 R 20 120 D TL Traxion 70

|                       |               |     |                            |         |      |      |      |      |      |      |      |      |      |      |
|-----------------------|---------------|-----|----------------------------|---------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692344671 |     | Section width              | 295 mm  |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,4 bar       |     | Overall diameter           | 945 mm  |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial        |     | Static loaded radius       | 439 mm  |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | W9            |     | Rolling circumference      | 2815 mm |      |      |      |      |      |      |      |      |      |      |
| Permitted rim width   | W10           |     | SRI                        | 450     |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | Tread depth                | 36 mm   |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | 75% of the tyre volume     | 55 l    |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |               |     | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 865 | 980                        | 1100    | 1215 | 1335 | 1430 | 1515 | 1605 | 1750 | 1880 | 1980 | 2100 |      |
|                       | 10H           | 715 | 830                        | 945     | 1055 | 1135 | 1220 | 1315 | 1425 | 1515 | 1610 |      |      |      |
|                       | 25            | 740 | 855                        | 975     | 1090 | 1170 | 1255 | 1355 | 1470 | 1560 | 1660 |      |      |      |
|                       | 30            | 715 | 830                        | 945     | 1055 | 1135 | 1220 | 1315 | 1425 | 1515 | 1610 |      |      |      |
|                       | 40            |     | 790                        | 900     | 1005 | 1080 | 1160 | 1255 | 1355 | 1440 | 1535 |      |      |      |
|                       | 50            |     | 760                        | 865     | 965  | 1035 | 1115 | 1200 | 1300 | 1380 | 1470 |      |      |      |
|                       | 65            |     |                            | 820     | 920  | 985  | 1060 | 1145 | 1240 | 1315 | 1400 |      |      |      |
|                       | 70            |     |                            | 750     | 835  | 900  | 965  | 1040 | 1130 | 1195 | 1275 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 320/70 R 20 123 D TL Traxion 70

|                       |               |     |                            |         |      |      |      |      |      |      |      |      |      |      |
|-----------------------|---------------|-----|----------------------------|---------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692344701 |     | Section width              | 320 mm  |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,4 bar       |     | Overall diameter           | 985 mm  |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial        |     | Static loaded radius       | 450 mm  |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | W10           |     | Rolling circumference      | 2935 mm |      |      |      |      |      |      |      |      |      |      |
| Permitted rim width   | W9, W11       |     | SRI                        | 475     |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | Tread depth                | 36 mm   |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | 75% of the tyre volume     | 69 l    |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |      |      |      |
|                       |               |     | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |               |     | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 955 | 1080                       | 1215    | 1345 | 1475 | 1580 | 1670 | 1770 | 1935 | 2075 | 2190 | 2325 |      |
|                       | 10H           | 790 | 915                        | 1045    | 1165 | 1255 | 1325 | 1450 | 1575 | 1670 | 1780 |      |      |      |
|                       | 25            | 815 | 945                        | 1075    | 1205 | 1290 | 1365 | 1495 | 1620 | 1720 | 1835 |      |      |      |
|                       | 30            | 790 | 915                        | 1045    | 1165 | 1255 | 1325 | 1450 | 1575 | 1670 | 1780 |      |      |      |
|                       | 40            |     | 875                        | 995     | 1110 | 1195 | 1260 | 1385 | 1500 | 1590 | 1695 |      |      |      |
|                       | 50            |     | 840                        | 950     | 1065 | 1145 | 1210 | 1325 | 1435 | 1525 | 1630 |      |      |      |
|                       | 65            |     |                            | 905     | 1015 | 1090 | 1150 | 1265 | 1370 | 1450 | 1550 |      |      |      |
|                       | 70            |     |                            | 825     | 925  | 990  | 1045 | 1150 | 1245 | 1320 | 1410 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 360/70 R 20 129 D TL Traxion 70

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692344756              |      |      |      |      |      | Section width          |      | 360 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 1045 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 479 mm  |      |      |      |
| Recommended rim width |     | W11                        |      |      |      |      |      | Rolling circumference  |      | 3115 mm |      |      |      |
| Permitted rim width   |     | W10, W12                   |      |      |      |      |      | SRI                    |      | 500     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 38 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 95 l    |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 1145                       | 1295 | 1455 | 1610 | 1770 | 1895 | 2005                   | 2125 | 2320    | 2490 | 2625 | 2775 |
|                       | 10H | 950                        | 1100 | 1250 | 1400 | 1505 | 1610 | 1740                   | 1890 | 2005    | 2130 |      |      |
|                       | 25  | 975                        | 1135 | 1290 | 1445 | 1550 | 1660 | 1795                   | 1945 | 2065    | 2190 |      |      |
|                       | 30  | 950                        | 1100 | 1250 | 1400 | 1505 | 1610 | 1740                   | 1890 | 2005    | 2130 |      |      |
|                       | 40  |                            | 1050 | 1190 | 1335 | 1430 | 1535 | 1660                   | 1795 | 1910    | 2025 |      |      |
|                       | 50  |                            | 1005 | 1140 | 1280 | 1375 | 1470 | 1590                   | 1725 | 1830    | 1945 |      |      |
|                       | 65  |                            |      | 1090 | 1215 | 1310 | 1400 | 1515                   | 1640 | 1740    | 1850 |      |      |
| 70                    |     |                            | 990  | 1110 | 1190 | 1275 | 1380 | 1495                   | 1585 | 1685    |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 380/70 R 20 132 D TL Traxion 70

|                       |     |                            |      |      |      |      |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692344763              |      |      |      |      |      | Section width          |      | 390 mm  |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 1070 mm |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 490 mm  |      |      |      |
| Recommended rim width |     | W12                        |      |      |      |      |      | Rolling circumference  |      | 3190 mm |      |      |      |
| Permitted rim width   |     | W11, W13                   |      |      |      |      |      | SRI                    |      | 525     |      |      |      |
|                       |     |                            |      |      |      |      |      | Tread depth            |      | 40 mm   |      |      |      |
|                       |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 108 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 1245                       | 1410 | 1585 | 1755 | 1925 | 2060 | 2180                   | 2310 | 2525    | 2705 | 2855 | 3000 |
|                       | 10H | 1030                       | 1195 | 1360 | 1525 | 1635 | 1725 | 1895                   | 2055 | 2180    | 2300 |      |      |
|                       | 25  | 1065                       | 1235 | 1405 | 1570 | 1685 | 1780 | 1955                   | 2115 | 2245    | 2370 |      |      |
|                       | 30  | 1030                       | 1195 | 1360 | 1525 | 1635 | 1725 | 1895                   | 2055 | 2180    | 2300 |      |      |
|                       | 40  |                            | 1140 | 1295 | 1450 | 1560 | 1645 | 1805                   | 1955 | 2075    | 2190 |      |      |
|                       | 50  |                            | 1095 | 1245 | 1390 | 1495 | 1575 | 1730                   | 1875 | 1990    | 2100 |      |      |
|                       | 65  |                            |      | 1185 | 1325 | 1425 | 1500 | 1650                   | 1785 | 1895    | 2000 |      |      |
| 70                    |     |                            | 1075 | 1205 | 1295 | 1365 | 1500 | 1625                   | 1725 | 1820    |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 320/70 R 24 116 D TL Traxion 70

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360688              |      |      |      | Section width          |      | 325 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1100 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 505 mm  |      |
| Recommended rim width |     | W10                        |      |      |      | Rolling circumference  |      | 3245 mm |      |
| Permitted rim width   |     | W9, W11                    |      |      |      | SRI                    |      | 525     |      |
|                       |     |                            |      |      |      | Tread depth            |      | 40 mm   |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 85 l    |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 1040                       | 1180 | 1325 | 1465 | 1610                   | 1725 | 1820    | 1930 |
|                       | 10H | 860                        | 1000 | 1135 | 1275 | 1365                   | 1440 |         |      |
|                       | 25  | 890                        | 1030 | 1170 | 1310 | 1410                   | 1480 |         |      |
|                       | 30  | 860                        | 1000 | 1135 | 1275 | 1365                   | 1440 |         |      |
|                       | 40  |                            | 955  | 1085 | 1210 | 1300                   | 1370 |         |      |
|                       | 50  |                            | 915  | 1040 | 1160 | 1250                   | 1315 |         |      |
|                       | 65  |                            |      | 990  | 1105 | 1190                   | 1250 |         |      |
|                       | 70  |                            |      | 900  | 1005 | 1080                   | 1140 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 360/70 R 24 122 D TL Traxion 70

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360695              |      |      |      | Section width          |      | 360 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1150 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 545 mm  |      |
| Recommended rim width |     | W11                        |      |      |      | Rolling circumference  |      | 3395 mm |      |
| Permitted rim width   |     | W10, W12                   |      |      |      | SRI                    |      | 550     |      |
|                       |     |                            |      |      |      | Tread depth            |      | 42 mm   |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 115 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 1245                       | 1410 | 1585 | 1750 | 1925                   | 2060 | 2180    | 2310 |
|                       | 10H | 1030                       | 1195 | 1360 | 1520 | 1635                   | 1725 |         |      |
|                       | 25  | 1060                       | 1235 | 1400 | 1570 | 1685                   | 1780 |         |      |
|                       | 30  | 1030                       | 1195 | 1360 | 1520 | 1635                   | 1725 |         |      |
|                       | 40  |                            | 1140 | 1295 | 1450 | 1555                   | 1645 |         |      |
|                       | 50  |                            | 1095 | 1240 | 1390 | 1495                   | 1575 |         |      |
|                       | 65  |                            |      | 1185 | 1325 | 1420                   | 1500 |         |      |
|                       | 70  |                            |      | 1075 | 1205 | 1295                   | 1365 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 380/70 R 24 125 D TL Traxion 70

|                       |     |                            |      |                        |      |         |      |      |      |
|-----------------------|-----|----------------------------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692360701              |      | Section width          |      | 385 mm  |      |      |      |
| Nominal tyre pressure |     | 1,6 bar                    |      | Overall diameter       |      | 1185 mm |      |      |      |
| Tyre construction     |     | Radial                     |      | Static loaded radius   |      | 540 mm  |      |      |      |
| Recommended rim width |     | W12                        |      | Rolling circumference  |      | 3495 mm |      |      |      |
| Permitted rim width   |     | W11, W12L,<br>W/DW13(L)    |      | SRI                    |      | 575     |      |      |      |
| EAN Tube              |     | 8714692239748              |      | Tread depth            |      | 44 mm   |      |      |      |
|                       |     |                            |      | 75% of the tyre volume |      | 140 l   |      |      |      |
|                       |     | Tyre pressure (bar)        |      |                        |      |         |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00                   | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 1350                       | 1530 | 1720                   | 1905 | 2090    | 2240 | 2370 | 2510 |
|                       | 10H | 1120                       | 1300 | 1480                   | 1655 | 1775    | 1895 |      |      |
|                       | 25  | 1155                       | 1340 | 1525                   | 1705 | 1830    | 1955 |      |      |
|                       | 30  | 1120                       | 1300 | 1480                   | 1655 | 1775    | 1895 |      |      |
|                       | 40  |                            | 1240 | 1405                   | 1575 | 1690    | 1805 |      |      |
|                       | 50  |                            | 1185 | 1350                   | 1510 | 1620    | 1735 |      |      |
|                       | 65  |                            |      | 1285                   | 1440 | 1545    | 1650 |      |      |
|                       | 70  |                            |      | 1170                   | 1310 | 1405    | 1500 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 420/70 R 24 130 D TL Traxion 70

|                       |     |                             |      |                        |      |         |      |      |      |
|-----------------------|-----|-----------------------------|------|------------------------|------|---------|------|------|------|
| EAN                   |     | 8714692360718               |      | Section width          |      | 430 mm  |      |      |      |
| Nominal tyre pressure |     | 1,6 bar                     |      | Overall diameter       |      | 1240 mm |      |      |      |
| Tyre construction     |     | Radial                      |      | Static loaded radius   |      | 560 mm  |      |      |      |
| Recommended rim width |     | W13                         |      | Rolling circumference  |      | 3675 mm |      |      |      |
| Permitted rim width   |     | W12(L), DW13(L),<br>W/DW14L |      | SRI                    |      | 600     |      |      |      |
| EAN Tube              |     | 8714692239755               |      | Tread depth            |      | 46 mm   |      |      |      |
|                       |     |                             |      | 75% of the tyre volume |      | 175 l   |      |      |      |
|                       |     | Tyre pressure (bar)         |      |                        |      |         |      |      |      |
|                       |     | 0,60                        | 0,80 | 1,00                   | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 |
|                       |     | Load capacity per tyre(kg)  |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10L | 1575                        | 1790 | 2005                   | 2220 | 2440    | 2615 | 2765 | 2930 |
|                       | 10H | 1305                        | 1515 | 1725                   | 1930 | 2075    | 2185 |      |      |
|                       | 25  | 1345                        | 1565 | 1775                   | 1990 | 2135    | 2250 |      |      |
|                       | 30  | 1305                        | 1515 | 1725                   | 1930 | 2075    | 2185 |      |      |
|                       | 40  |                             | 1445 | 1640                   | 1840 | 1975    | 2080 |      |      |
|                       | 50  |                             | 1385 | 1575                   | 1760 | 1895    | 1995 |      |      |
|                       | 65  |                             |      | 1500                   | 1680 | 1800    | 1900 |      |      |
|                       | 70  |                             |      | 1365                   | 1525 | 1640    | 1730 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 480/70 R 24 138 D TL Traxion 70

|                       |                           |      |                            |         |      |      |      |      |      |      |
|-----------------------|---------------------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360725             |      | Section width              | 490 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar                   |      | Overall diameter           | 1305 mm |      |      |      |      |      |      |
| Tyre construction     | Radial                    |      | Static loaded radius       | 585 mm  |      |      |      |      |      |      |
| Recommended rim width | DW15L                     |      | Rolling circumference      | 3850 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW14L, W15L,<br>W/DW16L |      | SRI                        | 625     |      |      |      |      |      |      |
|                       |                           |      | Tread depth                | 48 mm   |      |      |      |      |      |      |
|                       |                           |      | 75% of the tyre volume     | 240 l   |      |      |      |      |      |      |
|                       |                           |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                           |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                           |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L                       | 1940 | 2200                       | 2470    | 2735 | 3005 | 3220 | 3405 | 3605 |      |
|                       | 10H                       | 1610 | 1870                       | 2125    | 2375 | 2555 | 2715 |      |      |      |
|                       | 25                        | 1660 | 1925                       | 2190    | 2450 | 2630 | 2795 |      |      |      |
|                       | 30                        | 1610 | 1870                       | 2125    | 2375 | 2555 | 2715 |      |      |      |
|                       | 40                        |      | 1780                       | 2020    | 2265 | 2430 | 2585 |      |      |      |
|                       | 50                        |      | 1705                       | 1940    | 2170 | 2330 | 2480 |      |      |      |
|                       | 65                        |      |                            | 1845    | 2065 | 2220 | 2360 |      |      |      |
|                       | 70                        |      |                            | 1680    | 1880 | 2020 | 2150 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 380/70 R 28 127 D TL Traxion 70

|                       |                |      |                            |         |      |      |      |      |      |      |
|-----------------------|----------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360732  |      | Section width              | 390 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar        |      | Overall diameter           | 1290 mm |      |      |      |      |      |      |
| Tyre construction     | Radial         |      | Static loaded radius       | 590 mm  |      |      |      |      |      |      |
| Recommended rim width | W12            |      | Rolling circumference      | 3825 mm |      |      |      |      |      |      |
| Permitted rim width   | W11, W12L, W13 |      | SRI                        | 625     |      |      |      |      |      |      |
|                       |                |      | Tread depth                | 44 mm   |      |      |      |      |      |      |
|                       |                |      | 75% of the tyre volume     | 155 l   |      |      |      |      |      |      |
|                       |                |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L            | 1450 | 1650                       | 1850    | 2050 | 2250 | 2410 | 2550 | 2700 |      |
|                       | 10H            | 1205 | 1400                       | 1590    | 1780 | 1910 | 2010 |      |      |      |
|                       | 25             | 1240 | 1440                       | 1640    | 1835 | 1970 | 2075 |      |      |      |
|                       | 30             | 1205 | 1400                       | 1590    | 1780 | 1910 | 2010 |      |      |      |
|                       | 40             |      | 1330                       | 1515    | 1695 | 1820 | 1915 |      |      |      |
|                       | 50             |      | 1275                       | 1450    | 1625 | 1745 | 1840 |      |      |      |
|                       | 65             |      |                            | 1385    | 1545 | 1660 | 1750 |      |      |      |
|                       | 70             |      |                            | 1260    | 1410 | 1510 | 1595 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES

## DRIVE RADIAL

### 420/70 R 28 133 D TL Traxion 70

|                       |     |                            |      |      |      |                       |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|-----------------------|------|---------|------|
| EAN                   |     | 8714692360749              |      |      |      | Section width         |      | 430 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter      |      | 1345 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius  |      | 615 mm  |      |
| Recommended rim width |     | W13                        |      |      |      | Rolling circumference |      | 3975 mm |      |
| Permitted rim width   |     | W12(L), W/DW14L            |      |      |      | SRI                   |      | 650     |      |
| EAN Tube              |     | 8714692239793              |      |      |      | Tread depth           |      | 46 mm   |      |
|                       |     | 75% of the tyre volume     |      |      |      |                       |      |         |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                       |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                  | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                       |      |         |      |
| Speed (km/h)          | 10L | 1690                       | 1920 | 2155 | 2385 | 2620                  | 2805 | 2965    | 3145 |
|                       | 10H | 1405                       | 1630 | 1850 | 2070 | 2225                  | 2370 |         |      |
|                       | 25  | 1445                       | 1680 | 1910 | 2135 | 2295                  | 2440 |         |      |
|                       | 30  | 1405                       | 1630 | 1850 | 2070 | 2225                  | 2370 |         |      |
|                       | 40  |                            | 1550 | 1765 | 1975 | 2120                  | 2255 |         |      |
|                       | 50  |                            | 1485 | 1690 | 1890 | 2030                  | 2165 |         |      |
|                       | 65  |                            |      | 1610 | 1800 | 1935                  | 2060 |         |      |
| 70                    |     |                            | 1465 | 1640 | 1760 | 1875                  |      |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

### 480/70 R 28 140 D TL Traxion 70

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360756              |      |      |      | Section width          |      | 495 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1405 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 635 mm  |      |
| Recommended rim width |     | DW15L                      |      |      |      | Rolling circumference  |      | 4155 mm |      |
| Permitted rim width   |     | W/DW14L, W15L,             |      |      |      | SRI                    |      | 675     |      |
|                       |     | W/DW16L                    |      |      |      | Tread depth            |      | 48 mm   |      |
| EAN Tube              |     | 8714692239809              |      |      |      | 75% of the tyre volume |      | 255 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 2075                       | 2355 | 2645 | 2930 | 3215                   | 3445 | 3645    | 3860 |
|                       | 10H | 1725                       | 2000 | 2275 | 2545 | 2735                   | 2875 |         |      |
|                       | 25  | 1775                       | 2060 | 2345 | 2620 | 2815                   | 2965 |         |      |
|                       | 30  | 1725                       | 2000 | 2275 | 2545 | 2735                   | 2875 |         |      |
|                       | 40  |                            | 1905 | 2165 | 2425 | 2600                   | 2740 |         |      |
|                       | 50  |                            | 1825 | 2075 | 2325 | 2495                   | 2625 |         |      |
|                       | 65  |                            |      | 1975 | 2210 | 2375                   | 2500 |         |      |
| 70                    |     |                            | 1800 | 2015 | 2160 | 2275                   |      |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 480/70 R 30 141 D TL Traxion 70

|                       |                |      |                            |         |      |      |      |      |      |      |
|-----------------------|----------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360763  |      | Section width              | 490 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar        |      | Overall diameter           | 1470 mm |      |      |      |      |      |      |
| Tyre construction     | Radial         |      | Static loaded radius       | 665 mm  |      |      |      |      |      |      |
| Recommended rim width | DW15L          |      | Rolling circumference      | 4370 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW14L, W15L, |      | SRI                        | 700     |      |      |      |      |      |      |
|                       | W/DW16L        |      | Tread depth                | 48 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692331381  |      | 75% of the tyre volume     | 270 l   |      |      |      |      |      |      |
|                       |                |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L            | 2145 | 2435                       | 2730    | 3020 | 3320 | 3555 | 3760 | 3985 |      |
|                       | 10H            | 1780 | 2065                       | 2345    | 2625 | 2820 | 2960 |      |      |      |
|                       | 25             | 1835 | 2125                       | 2420    | 2705 | 2905 | 3050 |      |      |      |
|                       | 30             | 1780 | 2065                       | 2345    | 2625 | 2820 | 2960 |      |      |      |
|                       | 40             |      | 1965                       | 2235    | 2500 | 2685 | 2820 |      |      |      |
|                       | 50             |      | 1885                       | 2145    | 2400 | 2575 | 2705 |      |      |      |
|                       | 65             |      |                            | 2040    | 2285 | 2450 | 2575 |      |      |      |
|                       | 70             |      |                            | 1855    | 2080 | 2230 | 2345 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 480/70 R 34 143 D TL Traxion 70

|                       |                |      |                            |         |      |      |      |      |      |      |
|-----------------------|----------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360770  |      | Section width              | 485 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar        |      | Overall diameter           | 1575 mm |      |      |      |      |      |      |
| Tyre construction     | Radial         |      | Static loaded radius       | 715 mm  |      |      |      |      |      |      |
| Recommended rim width | DW15L          |      | Rolling circumference      | 4645 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW14L, W15L, |      | SRI                        | 750     |      |      |      |      |      |      |
|                       | W/DW16L        |      | Tread depth                | 52 mm   |      |      |      |      |      |      |
|                       |                |      | 75% of the tyre volume     | 295 l   |      |      |      |      |      |      |
|                       |                |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L            | 2275 | 2580                       | 2895    | 3205 | 3520 | 3770 | 3990 | 4230 |      |
|                       | 10H            | 1885 | 2190                       | 2490    | 2785 | 2990 | 3135 |      |      |      |
|                       | 25             | 1945 | 2255                       | 2565    | 2870 | 3085 | 3230 |      |      |      |
|                       | 30             | 1885 | 2190                       | 2490    | 2785 | 2990 | 3135 |      |      |      |
|                       | 40             |      | 2085                       | 2370    | 2650 | 2850 | 2985 |      |      |      |
|                       | 50             |      | 2000                       | 2275    | 2545 | 2730 | 2860 |      |      |      |
|                       | 65             |      |                            | 2165    | 2420 | 2600 | 2725 |      |      |      |
|                       | 70             |      |                            | 1970    | 2205 | 2365 | 2480 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 520/70 R 34 148 D TL Traxion 70

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360787              |      |      |      | Section width          |      | 525 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1640 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 740 mm  |      |
| Recommended rim width |     | DW16L                      |      |      |      | Rolling circumference  |      | 4840 mm |      |
| Permitted rim width   |     | W/DW15L, W16L,             |      |      |      | SRI                    |      | 775     |      |
|                       |     | W/DW18L                    |      |      |      | Tread depth            |      | 54 mm   |      |
| EAN Tube              |     | 8714692331411              |      |      |      | 75% of the tyre volume |      | 360 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 2570                       | 2915 | 3275 | 3625 | 3980                   | 4260 | 4505    | 4775 |
|                       | 10H | 2130                       | 2475 | 2810 | 3145 | 3380                   | 3620 |         |      |
|                       | 25  | 2195                       | 2550 | 2900 | 3245 | 3485                   | 3735 |         |      |
|                       | 30  | 2130                       | 2475 | 2810 | 3145 | 3380                   | 3620 |         |      |
|                       | 40  |                            | 2355 | 2680 | 2995 | 3220                   | 3450 |         |      |
|                       | 50  |                            | 2260 | 2570 | 2875 | 3085                   | 3310 |         |      |
|                       | 65  |                            |      | 2445 | 2735 | 2940                   | 3150 |         |      |
|                       | 70  |                            |      | 2225 | 2490 | 2675                   | 2865 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 480/70 R 38 145 D TL Traxion 70

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692360794              |      |      |      | Section width          |      | 485 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1685 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 765 mm  |      |
| Recommended rim width |     | DW15L                      |      |      |      | Rolling circumference  |      | 5015 mm |      |
| Permitted rim width   |     | W/DW14L, W15L,             |      |      |      | SRI                    |      | 800     |      |
|                       |     | W/DW16L                    |      |      |      | Tread depth            |      | 52 mm   |      |
| EAN Tube              |     | 8714692331459              |      |      |      | 75% of the tyre volume |      | 320 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 2400                       | 2725 | 3060 | 3385 | 3720                   | 3980 | 4210    | 4465 |
|                       | 10H | 1990                       | 2310 | 2630 | 2940 | 3160                   | 3335 |         |      |
|                       | 25  | 2050                       | 2380 | 2710 | 3030 | 3255                   | 3435 |         |      |
|                       | 30  | 1990                       | 2310 | 2630 | 2940 | 3160                   | 3335 |         |      |
|                       | 40  |                            | 2200 | 2500 | 2800 | 3005                   | 3175 |         |      |
|                       | 50  |                            | 2110 | 2400 | 2685 | 2885                   | 3045 |         |      |
|                       | 65  |                            |      | 2285 | 2555 | 2745                   | 2900 |         |      |
|                       | 70  |                            |      | 2080 | 2325 | 2500                   | 2640 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# TRACTOR TYRES DRIVE RADIAL

## 520/70 R 38 150 D TL Traxion 70

|                       |                |                            |         |      |      |      |      |      |      |
|-----------------------|----------------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360800  | Section width              | 540 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar        | Overall diameter           | 1750 mm |      |      |      |      |      |      |
| Tyre construction     | Radial         | Static loaded radius       | 790 mm  |      |      |      |      |      |      |
| Recommended rim width | DW16L          | Rolling circumference      | 5165 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW15L, W16L, | SRI                        | 825     |      |      |      |      |      |      |
|                       | W/DW18L        | Tread depth                | 54 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692331466  | 75% of the tyre volume     | 405 l   |      |      |      |      |      |      |
|                       |                | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L            | 2750                       | 3120    | 3500 | 3875 | 4255 | 4560 | 4820 | 5110 |
|                       | 10H            | 2280                       | 2645    | 3010 | 3365 | 3615 | 3850 |      |      |
|                       | 25             | 2350                       | 2725    | 3100 | 3470 | 3725 | 3970 |      |      |
|                       | 30             | 2280                       | 2645    | 3010 | 3365 | 3615 | 3850 |      |      |
|                       | 40             |                            | 2520    | 2865 | 3205 | 3445 | 3670 |      |      |
|                       | 50             |                            | 2415    | 2745 | 3075 | 3300 | 3520 |      |      |
|                       | 65             |                            |         | 2615 | 2930 | 3145 | 3350 |      |      |
|                       | 70             |                            |         | 2380 | 2665 | 2860 | 3050 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 580/70 R 38 155 D TL Traxion 70

|                       |               |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692360817 | Section width              | 595 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar       | Overall diameter           | 1825 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 820 mm  |      |      |      |      |      |      |
| Recommended rim width | DW18L         | Rolling circumference      | 5385 mm |      |      |      |      |      |      |
| Permitted rim width   | W18L          | SRI                        | 875     |      |      |      |      |      |      |
|                       |               | Tread depth                | 56 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692331473 | 75% of the tyre volume     | 525 l   |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 3200                       | 3630    | 4075 | 4510 | 4955 | 5305 | 5610 | 5950 |
|                       | 10H           | 2655                       | 3080    | 3500 | 3920 | 4210 | 4455 |      |      |
|                       | 25            | 2735                       | 3175    | 3610 | 4040 | 4340 | 4590 |      |      |
|                       | 30            | 2655                       | 3080    | 3500 | 3920 | 4210 | 4455 |      |      |
|                       | 40            |                            | 2935    | 3335 | 3730 | 4010 | 4245 |      |      |
|                       | 50            |                            | 2815    | 3200 | 3580 | 3845 | 4070 |      |      |
|                       | 65            |                            |         | 3045 | 3410 | 3660 | 3875 |      |      |
|                       | 70            |                            |         | 2770 | 3100 | 3330 | 3525 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES






## DRIVE RADIAL

### 620/70 R 42 166 D TL Traxion 70

|                       |     |                            |      |      |      |      |      |      |                        |      |         |      |      |  |
|-----------------------|-----|----------------------------|------|------|------|------|------|------|------------------------|------|---------|------|------|--|
| EAN                   |     | 8714692360824              |      |      |      |      |      |      | Section width          |      | 625 mm  |      |      |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      |      |      |      | Overall diameter       |      | 1930 mm |      |      |  |
| Tyre construction     |     | Radial                     |      |      |      |      |      |      | Static loaded radius   |      | 885 mm  |      |      |  |
| Recommended rim width |     | DW20B                      |      |      |      |      |      |      | Rolling circumference  |      | 5750 mm |      |      |  |
| Permitted rim width   |     | W18L, DW18L                |      |      |      |      |      |      | SRI                    |      | 925     |      |      |  |
|                       |     |                            |      |      |      |      |      |      | Tread depth            |      | 58 mm   |      |      |  |
|                       |     |                            |      |      |      |      |      |      | 75% of the tyre volume |      | 585 l   |      |      |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |      |      |                        |      |         |      |      |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00                   | 2,20 | 2,40    | 2,60 | 2,80 |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |      |      |                        |      |         |      |      |  |
| Speed (km/h)          | 10L | 3715                       | 4215 | 4730 | 5235 | 5750 | 6160 | 6515 | 6905                   | 7195 | 7445    | 7745 | 7950 |  |
|                       | 10H | 3080                       | 3575 | 4065 | 4550 | 4885 | 5175 | 5460 | 5695                   | 5895 | 6095    |      |      |  |
|                       | 25  | 3175                       | 3685 | 4190 | 4690 | 5035 | 5335 | 5625 | 5870                   | 6075 | 6280    |      |      |  |
|                       | 30  | 3080                       | 3575 | 4065 | 4550 | 4885 | 5175 | 5460 | 5695                   | 5895 | 6095    |      |      |  |
|                       | 40  |                            | 3405 | 3870 | 4330 | 4655 | 4930 | 5200 | 5425                   | 5615 | 5805    |      |      |  |
|                       | 50  |                            | 3265 | 3710 | 4155 | 4460 | 4725 | 4985 | 5200                   | 5385 | 5565    |      |      |  |
|                       | 65  |                            |      | 3535 | 3955 | 4250 | 4500 | 4745 | 4950                   | 5130 | 5300    |      |      |  |
| 70                    |     |                            | 3215 | 3600 | 3865 | 4095 | 4320 | 4505 | 4665                   | 4825 |         |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRAXION+ 70

| Ø  | Tyre size   | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 24 | 320/70 R 24 | 116 D               | 1,6                              | W10   | 320  | 1095   | 520  | 3280   | 59   |
|    | 360/70 R 24 | 122 D               | 1,6                              | W11   | 360  | 1150   | 545  | 3445   | 59   |
|    | 380/70 R 24 | 125 D               | 1,6                              | W12   | 390  | 1190   | 565  | 3570   | 60   |
|    | 420/70 R 24 | 130 D               | 1,6                              | W13   | 430  | 1245   | 595  | 3755   | 60   |
|    | 480/70 R 24 | 138 D               | 1,6                              | DW15L   | 495  | 1315   | 620  | 3950   | 61   |
| 28 | 380/70 R 28 | 127 D               | 1,6                              | W12   | 390  | 1295   | 620  | 3895   | 61   |
|    | 420/70 R 28 | 133 D               | 1,6                              | W13   | 430  | 1350   | 640  | 4055   | 62   |
|    | 480/70 R 28 | 140 D               | 1,6                              | DW15L   | 495  | 1415   | 655  | 4240   | 62   |
| 34 | 480/70 R 30 | 141 D               | 1,6                              | DW15L   | 495  | 1475   | 695  | 4440   | 63   |
|    | 480/70 R 34 | 143 D               | 1,6                              | DW15L   | 495  | 1575   | 750  | 4765   | 63   |
|    | 520/70 R 34 | 148 D               | 1,6                              | DW16L   | 540  | 1640   | 770  | 4950   | 64   |
| 38 | 480/70 R 38 | 145 D               | 1,6                              | DW15L   | 495  | 1680   | 795  | 5025   | 64   |
|    | 520/70 R 38 | 150 D               | 1,6                              | DW16L   | 540  | 1750   | 815  | 5275   | 65   |
|    | 580/70 R 38 | 155 D               | 1,6                              | DW18L   | 600  | 1830   | 840  | 5515   | 65   |
| 42 | 620/70 R 42 | 166 D               | 2,4                              | DW20B   | 625  | 1930   | 880  | 5780   | 66   |



N  
N  
N  
N  
N

# TRACTOR TYRES DRIVE RADIAL



## TRAXION 85

THE STANDARD FOR MEDIUM  
CLASS TRACTORS

### FEATURES






- Non-parallel cleats
- Reinforced bead design
- Distinctive curved cleats

### BENEFITS

- Excellent self-cleaning and improved traction
- Optimal stability at high speeds
- Improved ride and long lifespan



# TRAXION 85

| Ø  | Tyre size   | Service description | Nominal inflation pressure (bar) |  |  |  |  |  | Pag. |                 |
|----|-------------|---------------------|----------------------------------|---|---|---|---|---|------|-----------------|
| 16 | 210/95 R 16 | 110 D               | 2,8                              | W7  | 215*  | 800*  | 360*  | 2415*   | 70   | N <sup>II</sup> |
| 18 | 210/95 R 18 | 112 D               | 2,8                              | W7  | 215*  | 850*  | 385*  | 2560*   | 70   | N <sup>II</sup> |
| 20 | 280/85 R 20 | 118 D               | 2,0                              | W10   | 295*  | 980*  | 440*  | 2955*   | 71   | N <sup>II</sup> |
|    | 320/85 R 20 | 124 D               | 2,0                              | W10   | 330*  | 1050*   | 470*  | 3160*   | 71   | N <sup>II</sup> |
| 24 | 280/85 R 24 | 115 A8/B            | 1,6                              | W10   | 295   | 1090  | 520   | 3275  | 72   | "               |
|    | 280/85 R 24 | 130 A8/B            | 4                                | W10   | 295   | 1095  | 515   | 3320  | 72   | "               |
|    | 320/85 R 24 | 122 A8/B            | 1,6                              | W11   | 335   | 1145  | 540   | 3430  | 73   | "               |
|    | 340/85 R 24 | 125 A8/B            | 1,6                              | W12   | 360   | 1190  | 550   | 3535  | 73   | "               |
|    | 380/85 R 24 | 131 A8/B            | 1,6                              | W13   | 400   | 1240  | 580   | 3710  | 74   | "               |
|    | 420/85 R 24 | 137 A8/B            | 1,6                              | DW15L   | 450   | 1320  | 620   | 3925  | 74   | "               |
| 28 | 280/85 R 28 | 118 A8/B            | 1,6                              | W10   | 285   | 1195  | 545   | 3570  | 75   | "               |
|    | 320/85 R 28 | 124 A8/B            | 1,6                              | W11   | 335   | 1250  | 585   | 3725  | 75   | "               |
|    | 340/85 R 28 | 127 A8/B            | 1,6                              | W12   | 360   | 1290  | 610   | 3870  | 76   | "               |
|    | 380/85 R 28 | 133 A8/B            | 1,6                              | W13   | 400   | 1345  | 630   | 3985  | 76   | "               |
|    | 380/85 R 28 | 145 A8/B            | 3,2                              | W13   | 395   | 1350  | 610   | 4020  | 77   | N <sup>II</sup> |
|    | 420/85 R 28 | 139 A8/B            | 1,6                              | DW15L   | 455   | 1415  | 660   | 4215  | 77   | "               |
| 30 | 380/85 R 30 | 135 A8/B            | 1,6                              | W12   | 385   | 1410  | 640   | 4155  | 78   | "               |
|    | 420/85 R 30 | 140 A8/B            | 1,6                              | DW15L   | 455   | 1470  | 685   | 4425  | 78   | "               |
|    | 460/85 R 30 | 145 A8/B            | 1,6                              | DW16L   | 490   | 1545  | 725   | 4605  | 79   | "               |
| 34 | 380/85 R 34 | 137 A8/B            | 1,6                              | W12   | 390   | 1505  | 680   | 4475  | 79   | "               |
|    | 420/85 R 34 | 142 A8/B            | 1,6                              | DW15L   | 455   | 1570  | 735   | 4700  | 80   | "               |
|    | 460/85 R 34 | 147 A8/B            | 1,6                              | DW16L   | 490   | 1640  | 765   | 4915  | 80   | "               |
| 38 | 340/85 R 38 | 133 A8/B            | 1,6                              | W12   | 360   | 1550  | 730   | 4680  | 81   | "               |
|    | 380/80 R 38 | 142 A8/B            | 2,4                              | W12   | 390   | 1580  | 735   | 4820  | 81   | "               |
|    | 420/85 R 38 | 144 A8/B            | 1,6                              | DW15L   | 455   | 1670  | 780   | 5035  | 82   | "               |
|    | 460/85 R 38 | 149 A8/B            | 1,6                              | DW16L   | 490   | 1750  | 815   | 5205  | 82   | "               |
|    | 520/85 R 38 | 155 A8/B            | 1,6                              | DW18L   | 555   | 1830  | 850   | 5465  | 83   | "               |
|    | 420/80 R 38 | 156 A8/B            | 2,4                              | DW16L   | 500   | 1850  | 855   | 5600  | 83   | "               |
| 42 | 520/85 R 42 | 157 A8/B            | 1,6                              | DW18L   | 555   | 1930  | 905   | 5785  | 84   | "               |
|    | 480/80 R 46 | 158 A8/B            | 2,4                              | DW16L   | 500   | 1950  | 900   | 5885  | 84   | "               |
| 46 | 520/85 R 46 | 158 A8/B            | 1,6                              | DW16 L  | 535   | 2050  | 930   | 6150  | 85   | "               |
|    | 480/80 R 50 | 159 A8/B            | 2,4                              | DW16L   | 500   | 2045  | 950   | 6225  | 85   | "               |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values II = Traxion 85 II

# TRACTOR TYRES DRIVE RADIAL

## 210/95 R 16 110 D TL Traxion 85 II

|                       |                         |     |                            |          |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------------------|-------------------------|-----|----------------------------|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692805493           |     | Section width              | 215* mm  |      |      |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,8 bar                 |     | Overall diameter           | 800* mm  |      |      |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial                  |     | Static loaded radius       | 360* mm  |      |      |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | W7                      |     | Rolling circumference      | 2415* mm |      |      |      |      |      |      |      |      |      |      |      |      |
| Permitted rim width   | 5.50F, 6.00F, W6, 6.00F |     | SRI                        | 390      |      |      |      |      |      |      |      |      |      |      |      |      |
| Alternative tyre size | 7.50 R 16               |     | Tread depth                | 32* mm   |      |      |      |      |      |      |      |      |      |      |      |      |
|                       |                         |     | 75% of the tyre volume     | 39 l     |      |      |      |      |      |      |      |      |      |      |      |      |
|                       |                         |     | Tyre pressure (bar)        |          |      |      |      |      |      |      |      |      |      |      |      |      |
|                       |                         |     | 0,60                       | 0,80     | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 | 3,00 | 3,20 |
|                       |                         |     | Load capacity per tyre(kg) |          |      |      |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L                     | 585 | 665                        | 750      | 830  | 910  | 975  | 1030 | 1105 | 1190 | 1280 | 1350 | 1425 | 1510 | 1590 |      |
|                       | 10H                     | 485 | 565                        | 645      | 720  | 770  | 815  | 895  | 970  | 1030 | 1095 | 1160 | 1220 |      |      |      |
|                       | 25                      | 500 | 585                        | 660      | 740  | 795  | 840  | 920  | 1000 | 1060 | 1125 | 1195 | 1255 |      |      |      |
|                       | 30                      | 485 | 565                        | 645      | 720  | 770  | 815  | 895  | 970  | 1030 | 1095 | 1160 | 1220 |      |      |      |
|                       | 40                      |     | 540                        | 610      | 685  | 735  | 775  | 850  | 925  | 980  | 1040 | 1105 | 1160 |      |      |      |
|                       | 50                      |     | 515                        | 585      | 655  | 705  | 745  | 815  | 885  | 940  | 1000 | 1060 | 1115 |      |      |      |
|                       | 65                      |     |                            | 560      | 625  | 670  | 710  | 780  | 845  | 895  | 950  | 1010 | 1060 |      |      |      |
|                       | 70                      |     |                            | 510      | 570  | 610  | 645  | 710  | 765  | 815  | 865  | 915  | 965  |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

## 210/95 R 18 112 D TL Traxion 85 II

|                       |                         |     |                            |          |      |      |      |      |      |      |      |      |      |      |      |      |
|-----------------------|-------------------------|-----|----------------------------|----------|------|------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692805509           |     | Section width              | 215* mm  |      |      |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,8 bar                 |     | Overall diameter           | 850* mm  |      |      |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial                  |     | Static loaded radius       | 385* mm  |      |      |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | W7                      |     | Rolling circumference      | 2560* mm |      |      |      |      |      |      |      |      |      |      |      |      |
| Permitted rim width   | 5.50F, 6.00F, W6, 6.00F |     | SRI                        | 410      |      |      |      |      |      |      |      |      |      |      |      |      |
| Alternative tyre size | 7.50 R 18               |     | Tread depth                | 32 mm    |      |      |      |      |      |      |      |      |      |      |      |      |
|                       |                         |     | 75% of the tyre volume     | 41 l     |      |      |      |      |      |      |      |      |      |      |      |      |
|                       |                         |     | Tyre pressure (bar)        |          |      |      |      |      |      |      |      |      |      |      |      |      |
|                       |                         |     | 0,60                       | 0,80     | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 | 3,00 | 3,20 |
|                       |                         |     | Load capacity per tyre(kg) |          |      |      |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L                     | 620 | 705                        | 790      | 875  | 960  | 1030 | 1085 | 1165 | 1255 | 1350 | 1425 | 1500 | 1595 | 1680 |      |
|                       | 10H                     | 515 | 595                        | 680      | 760  | 815  | 860  | 945  | 1025 | 1085 | 1150 | 1225 | 1290 |      |      |      |
|                       | 25                      | 530 | 615                        | 700      | 780  | 840  | 890  | 975  | 1055 | 1120 | 1185 | 1260 | 1325 |      |      |      |
|                       | 30                      | 515 | 595                        | 680      | 760  | 815  | 860  | 945  | 1025 | 1085 | 1150 | 1225 | 1290 |      |      |      |
|                       | 40                      |     | 570                        | 645      | 725  | 775  | 820  | 900  | 975  | 1035 | 1095 | 1165 | 1225 |      |      |      |
|                       | 50                      |     | 545                        | 620      | 695  | 745  | 790  | 860  | 935  | 990  | 1050 | 1115 | 1175 |      |      |      |
|                       | 65                      |     |                            | 590      | 660  | 710  | 750  | 820  | 890  | 945  | 1000 | 1065 | 1120 |      |      |      |
|                       | 70                      |     |                            | 535      | 600  | 645  | 685  | 745  | 810  | 860  | 910  | 970  | 1020 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

# TRACTOR TYRES DRIVE RADIAL

## 280/85 R 20 118 D TL Traxion 85 II

|                       |     |                            |      |      |      |      |                        |      |          |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|----------|------|------|
| EAN                   |     | 8714692805516              |      |      |      |      | Section width          |      | 295* mm  |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 980* mm  |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 440* mm  |      |      |
| Recommended rim width |     | W10                        |      |      |      |      | Rolling circumference  |      | 2955* mm |      |      |
| Permitted rim width   |     | W8, W9                     |      |      |      |      | SRI                    |      | 475      |      |      |
| Alternative tyre size |     | 11.2 R 20                  |      |      |      |      | Tread depth            |      | 37 mm    |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 81 l     |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |          |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00     | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |          |      |      |
| Speed (km/h)          | 10L | 920                        | 1045 | 1170 | 1295 | 1425 | 1525                   | 1610 | 1730     | 1865 | 1980 |
|                       | 10H | 765                        | 885  | 1005 | 1125 | 1210 | 1290                   | 1400 | 1520     |      |      |
|                       | 25  | 785                        | 910  | 1035 | 1160 | 1245 | 1325                   | 1445 | 1565     |      |      |
|                       | 30  | 765                        | 885  | 1005 | 1125 | 1210 | 1290                   | 1400 | 1520     |      |      |
|                       | 40  |                            | 845  | 960  | 1070 | 1150 | 1225                   | 1335 | 1445     |      |      |
|                       | 50  |                            | 810  | 920  | 1030 | 1105 | 1175                   | 1280 | 1385     |      |      |
|                       | 65  |                            |      | 875  | 980  | 1050 | 1120                   | 1220 | 1320     |      |      |
|                       | 70  |                            |      | 795  | 890  | 955  | 1020                   | 1110 | 1200     |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

## 320/85 R 20 124 D TL Traxion 85 II

|                       |     |                            |      |      |      |      |                        |      |          |      |      |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|----------|------|------|
| EAN                   |     | 8714692805523              |      |      |      |      | Section width          |      | 330* mm  |      |      |
| Nominal tyre pressure |     | 2,0 bar                    |      |      |      |      | Overall diameter       |      | 1050* mm |      |      |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 470* mm  |      |      |
| Recommended rim width |     | W11                        |      |      |      |      | Rolling circumference  |      | 3160* mm |      |      |
| Permitted rim width   |     | W9, W10, DW11              |      |      |      |      | SRI                    |      | 500      |      |      |
| Alternative tyre size |     | 12.4 R 20                  |      |      |      |      | Tread depth            |      | 40 mm    |      |      |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 110 l    |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |          |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00     | 2,20 | 2,40 |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |          |      |      |
| Speed (km/h)          | 10L | 1130                       | 1285 | 1440 | 1595 | 1750 | 1875                   | 1985 | 2130     | 2295 | 2400 |
|                       | 10H | 940                        | 1090 | 1240 | 1385 | 1490 | 1565                   | 1725 | 1840     |      |      |
|                       | 25  | 965                        | 1120 | 1275 | 1430 | 1535 | 1610                   | 1775 | 1895     |      |      |
|                       | 30  | 940                        | 1090 | 1240 | 1385 | 1490 | 1565                   | 1725 | 1840     |      |      |
|                       | 40  |                            | 1035 | 1180 | 1320 | 1415 | 1490                   | 1640 | 1750     |      |      |
|                       | 50  |                            | 995  | 1130 | 1265 | 1360 | 1430                   | 1575 | 1680     |      |      |
|                       | 65  |                            |      | 1075 | 1205 | 1295 | 1360                   | 1500 | 1600     |      |      |
|                       | 70  |                            |      | 980  | 1095 | 1180 | 1240                   | 1365 | 1455     |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

# TRACTOR TYRES DRIVE RADIAL

## 280/85 R 24 115 A8/B TL Traxion 85

|                       |               |                            |         |      |      |      |      |      |      |  |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|--|
| EAN                   | 8714692244551 | Section width              | 295 mm  |      |      |      |      |      |      |  |
| Nominal tyre pressure | 1,6 bar       | Overall diameter           | 1090 mm |      |      |      |      |      |      |  |
| Tyre construction     | Radial        | Static loaded radius       | 520 mm  |      |      |      |      |      |      |  |
| Recommended rim width | W10           | Rolling circumference      | 3275 mm |      |      |      |      |      |      |  |
| Permitted rim width   | W9            | SRI                        | 525     |      |      |      |      |      |      |  |
| Alternative tyre size | 11.2 R 24     | Tread depth                | 37 mm   |      |      |      |      |      |      |  |
| EAN Tube              | 8714692239724 | 75% of the tyre volume     | 75 l    |      |      |      |      |      |      |  |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |  |
|                       |               | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |  |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |  |
| Speed (km/h)          | 10L           | 1000                       | 1135    | 1275 | 1410 | 1550 | 1660 | 1755 | 1860 |  |
|                       | 10H           | 775                        | 895     | 1020 | 1140 | 1225 | 1300 |      |      |  |
|                       | 25            | 800                        | 930     | 1055 | 1185 | 1270 | 1350 |      |      |  |
|                       | 30            | 775                        | 895     | 1020 | 1140 | 1225 | 1300 |      |      |  |
|                       | 40            |                            | 840     | 955  | 1065 | 1145 | 1215 |      |      |  |
|                       | 50            |                            | 840     | 955  | 1065 | 1145 | 1215 |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 280/85 R 24 130 A8/B TL Traxion 85 II

|                       |               |                            |         |      |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692350566 | Section width              | 295 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar       | Overall diameter           | 1090 mm |      |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 520 mm  |      |      |      |      |      |      |      |
| Recommended rim width | W10           | Rolling circumference      | 3275 mm |      |      |      |      |      |      |      |
| Permitted rim width   | W9            | SRI                        | 525     |      |      |      |      |      |      |      |
| Alternative tyre size | 11.2 R 24     | Tread depth                | 37 mm   |      |      |      |      |      |      |      |
| EAN Tube              | 8714692239724 | 75% of the tyre volume     | 75 l    |      |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |
|                       |               | 0,80                       | 1,20    | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 1165                       | 1385    | 1610 | 1860 | 2005 | 2100 | 2265 | 2430 | 2520 |
|                       | 10H           | 925                        | 1095    | 1300 | 1430 | 1500 | 1665 | 1800 | 1915 | 2035 |
|                       | 25            | 955                        | 1135    | 1350 | 1480 | 1555 | 1730 | 1865 | 1990 | 2110 |
|                       | 30            | 925                        | 1095    | 1300 | 1430 | 1500 | 1665 | 1800 | 1915 | 2035 |
|                       | 40            |                            | 1025    | 1215 | 1335 | 1400 | 1555 | 1680 | 1790 | 1900 |
|                       | 50            |                            | 1025    | 1215 | 1335 | 1400 | 1555 | 1680 | 1790 | 1900 |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# TRACTOR TYRES DRIVE RADIAL

| 320/85 R 24 TL 122 A8/B Traxion 85 |     |                            |      |      |      |                        |      |         |      |  |
|------------------------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|
| EAN                                |     | 8714692109751              |      |      |      | Section width          |      | 335 mm  |      |  |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1145 mm |      |  |
| Tyre construction                  |     | Radial                     |      |      |      | Static loaded radius   |      | 540 mm  |      |  |
| Recommended rim width              |     | W11                        |      |      |      | Rolling circumference  |      | 3430 mm |      |  |
| Permitted rim width                |     | W9, W/DW10                 |      |      |      | SRI                    |      | 550     |      |  |
| Alternative tyre size              |     | 12.4 R 24                  |      |      |      | Tread depth            |      | 40 mm   |      |  |
| EAN Tube                           |     | 8714692239731              |      |      |      | 75% of the tyre volume |      | 100 l   |      |  |
|                                    |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |
|                                    |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |
| Speed (km/h)                       | 10L | 1225                       | 1395 | 1565 | 1730 | 1900                   | 2035 | 2155    | 2280 |  |
|                                    | 10H | 950                        | 1100 | 1250 | 1400 | 1505                   | 1605 |         |      |  |
|                                    | 25  | 985                        | 1140 | 1295 | 1450 | 1560                   | 1665 |         |      |  |
|                                    | 30  | 950                        | 1100 | 1250 | 1400 | 1505                   | 1605 |         |      |  |
|                                    | 40  |                            | 1030 | 1170 | 1310 | 1405                   | 1500 |         |      |  |
|                                    | 50  |                            | 1030 | 1170 | 1310 | 1405                   | 1500 |         |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

| 340/85 R 24 125 A8/B TL Traxion 85 |     |                            |      |      |      |                        |      |         |      |  |
|------------------------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|
| EAN                                |     | 8714692109768              |      |      |      | Section width          |      | 360 mm  |      |  |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1190 mm |      |  |
| Tyre construction                  |     | Radial                     |      |      |      | Static loaded radius   |      | 550 mm  |      |  |
| Recommended rim width              |     | W12                        |      |      |      | Rolling circumference  |      | 3535 mm |      |  |
| Permitted rim width                |     | W11, W12L                  |      |      |      | SRI                    |      | 575     |      |  |
| Alternative tyre size              |     | 13.6 R 24                  |      |      |      | Tread depth            |      | 41 mm   |      |  |
| EAN Tube                           |     | 8714692239748              |      |      |      | 75% of the tyre volume |      | 125 l   |      |  |
|                                    |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |
|                                    |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |
| Speed (km/h)                       | 10L | 1350                       | 1530 | 1715 | 1900 | 2085                   | 2235 | 2365    | 2505 |  |
|                                    | 10H | 1040                       | 1210 | 1375 | 1535 | 1650                   | 1765 |         |      |  |
|                                    | 25  | 1080                       | 1255 | 1425 | 1595 | 1710                   | 1830 |         |      |  |
|                                    | 30  | 1040                       | 1210 | 1375 | 1535 | 1650                   | 1765 |         |      |  |
|                                    | 40  |                            | 1130 | 1285 | 1435 | 1540                   | 1650 |         |      |  |
|                                    | 50  |                            | 1130 | 1285 | 1435 | 1540                   | 1650 |         |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 380/85 R 24 131 A8/B TL Traxion 85

|                       |                         |      |                            |         |      |      |      |      |      |      |
|-----------------------|-------------------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692109775           |      | Section width              | 400 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar                 |      | Overall diameter           | 1240 mm |      |      |      |      |      |      |
| Tyre construction     | Radial                  |      | Static loaded radius       | 580 mm  |      |      |      |      |      |      |
| Recommended rim width | W13                     |      | Rolling circumference      | 3710 mm |      |      |      |      |      |      |
| Permitted rim width   | W11, W12(L),<br>DW13(L) |      | SRI                        | 600     |      |      |      |      |      |      |
| Alternative tyre size | 14.9 R 24               |      | Tread depth                | 43 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692239755           |      | 75% of the tyre volume     | 155 l   |      |      |      |      |      |      |
|                       |                         |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                         |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                         |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L                     | 1600 | 1820                       | 2040    | 2260 | 2480 | 2660 | 2810 | 2980 |      |
|                       | 10H                     | 1235 | 1435                       | 1630    | 1825 | 1960 | 2085 |      |      |      |
|                       | 25                      | 1285 | 1490                       | 1695    | 1895 | 2035 | 2165 |      |      |      |
|                       | 30                      | 1235 | 1435                       | 1630    | 1825 | 1960 | 2085 |      |      |      |
|                       | 40                      |      | 1340                       | 1525    | 1705 | 1835 | 1950 |      |      |      |
|                       | 50                      |      | 1340                       | 1525    | 1705 | 1835 | 1950 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 420/85 R 24 137 A8/B TL Traxion 85

|                       |                             |      |                            |         |      |      |      |      |      |      |
|-----------------------|-----------------------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692206344               |      | Section width              | 450 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar                     |      | Overall diameter           | 1320 mm |      |      |      |      |      |      |
| Tyre construction     | Radial                      |      | Static loaded radius       | 620 mm  |      |      |      |      |      |      |
| Recommended rim width | DW15L                       |      | Rolling circumference      | 3925 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW13(L),<br>W/DW14L, W15L |      | SRI                        | 625     |      |      |      |      |      |      |
| Alternative tyre size | 16.9 R 24                   |      | Tread depth                | 45 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692239755               |      | 75% of the tyre volume     | 210 l   |      |      |      |      |      |      |
|                       |                             |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                             |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                             |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L                         | 1875 | 2130                       | 2390    | 2645 | 2905 | 3110 | 3290 | 3485 |      |
|                       | 10H                         | 1450 | 1680                       | 1910    | 2140 | 2295 | 2460 |      |      |      |
|                       | 25                          | 1500 | 1745                       | 1980    | 2220 | 2380 | 2555 |      |      |      |
|                       | 30                          | 1450 | 1680                       | 1910    | 2140 | 2295 | 2460 |      |      |      |
|                       | 40                          |      | 1570                       | 1785    | 2000 | 2145 | 2300 |      |      |      |
|                       | 50                          |      | 1570                       | 1785    | 2000 | 2145 | 2300 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

| 280/85 R 28 118 A8/B TL Traxion 85 |     |                            |      |      |      |                        |      |         |      |  |
|------------------------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|
| EAN                                |     | 8714692309779              |      |      |      | Section width          |      | 285 mm  |      |  |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1195 mm |      |  |
| Tyre construction                  |     | Radial                     |      |      |      | Static loaded radius   |      | 555 mm  |      |  |
| Recommended rim width              |     | W10                        |      |      |      | Rolling circumference  |      | 3540 mm |      |  |
| Permitted rim width                |     | W9                         |      |      |      | SRI                    |      | 575     |      |  |
| Alternative tyre size              |     | 11.2 R 28                  |      |      |      | Tread depth            |      | 36 mm   |      |  |
| EAN Tube                           |     | 8714692239762              |      |      |      | 75% of the tyre volume |      | 90 l    |      |  |
|                                    |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |
|                                    |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |
| Speed (km/h)                       | 10L | 1080                       | 1225 | 1375 | 1520 | 1670                   | 1790 | 1895    | 2005 |  |
|                                    | 10H | 835                        | 965  | 1100 | 1230 | 1320                   | 1410 |         |      |  |
|                                    | 25  | 865                        | 1005 | 1140 | 1275 | 1370                   | 1465 |         |      |  |
|                                    | 30  | 835                        | 965  | 1100 | 1230 | 1320                   | 1410 |         |      |  |
|                                    | 40  |                            | 905  | 1025 | 1150 | 1235                   | 1320 |         |      |  |
|                                    | 50  |                            | 905  | 1025 | 1150 | 1235                   | 1320 |         |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

| 320/85 R 28 124 A8/B TL Traxion 85 |     |                            |      |      |      |                        |      |         |      |  |
|------------------------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|
| EAN                                |     | 8714692109782              |      |      |      | Section width          |      | 335 mm  |      |  |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1250 mm |      |  |
| Tyre construction                  |     | Radial                     |      |      |      | Static loaded radius   |      | 585 mm  |      |  |
| Recommended rim width              |     | W11                        |      |      |      | Rolling circumference  |      | 3725 mm |      |  |
| Permitted rim width                |     | W9, W/DW10                 |      |      |      | SRI                    |      | 600     |      |  |
| Alternative tyre size              |     | 12.4 R 28                  |      |      |      | Tread depth            |      | 40 mm   |      |  |
| EAN Tube                           |     | 8714692239779              |      |      |      | 75% of the tyre volume |      | 115 l   |      |  |
|                                    |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |
|                                    |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |
| Speed (km/h)                       | 10L | 1320                       | 1500 | 1680 | 1860 | 2045                   | 2190 | 2315    | 2455 |  |
|                                    | 10H | 1020                       | 1185 | 1345 | 1505 | 1615                   | 1710 |         |      |  |
|                                    | 25  | 1055                       | 1225 | 1395 | 1560 | 1675                   | 1775 |         |      |  |
|                                    | 30  | 1020                       | 1185 | 1345 | 1505 | 1615                   | 1710 |         |      |  |
|                                    | 40  |                            | 1105 | 1255 | 1405 | 1510                   | 1600 |         |      |  |
|                                    | 50  |                            | 1105 | 1255 | 1405 | 1510                   | 1600 |         |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 340/85 R 28 127 A8/B TL Traxion 85

|                       |               |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692109799 | Section width              | 360 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar       | Overall diameter           | 1290 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 610 mm  |      |      |      |      |      |      |
| Recommended rim width | W12           | Rolling circumference      | 3870 mm |      |      |      |      |      |      |
| Permitted rim width   | W11, W12L     | SRI                        | 625     |      |      |      |      |      |      |
| Alternative tyre size | 13.6 R 28     | Tread depth                | 41 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692239786 | 75% of the tyre volume     | 135 l   |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 1445                       | 1645    | 1845 | 2040 | 2240 | 2400 | 2540 | 2690 |
|                       | 10H           | 1120                       | 1295    | 1475 | 1650 | 1770 | 1875 |      |      |
|                       | 25            | 1160                       | 1345    | 1530 | 1710 | 1840 | 1945 |      |      |
|                       | 30            | 1120                       | 1295    | 1475 | 1650 | 1770 | 1875 |      |      |
|                       | 40            |                            | 1210    | 1380 | 1540 | 1655 | 1750 |      |      |
|                       | 50            |                            | 1210    | 1380 | 1540 | 1655 | 1750 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 380/85 R 28 133 A8/B TL Traxion 85

|                       |               |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692109805 | Section width              | 400 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar       | Overall diameter           | 1345 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 630 mm  |      |      |      |      |      |      |
| Recommended rim width | W13           | Rolling circumference      | 3985 mm |      |      |      |      |      |      |
| Permitted rim width   | W11, W12(L)   | SRI                        | 650     |      |      |      |      |      |      |
| Alternative tyre size | 14.9 R 28     | Tread depth                | 43 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692239793 | 75% of the tyre volume     | 175 l   |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 1715                       | 1950    | 2185 | 2420 | 2660 | 2850 | 3010 | 3190 |
|                       | 10H           | 1325                       | 1540    | 1750 | 1955 | 2100 | 2205 |      |      |
|                       | 25            | 1375                       | 1595    | 1815 | 2030 | 2180 | 2285 |      |      |
|                       | 30            | 1325                       | 1540    | 1750 | 1955 | 2100 | 2205 |      |      |
|                       | 40            |                            | 1440    | 1635 | 1830 | 1965 | 2060 |      |      |
|                       | 50            |                            | 1440    | 1635 | 1830 | 1965 | 2060 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 380/85 R 28 145 A8/B TL Traxion 85 II

|                       |               |                        |         |
|-----------------------|---------------|------------------------|---------|
| EAN                   | 8714692800610 | Section width          | 395 mm  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter       | 1350 mm |
| Tyre construction     | Radial        | Static loaded radius   | 610 mm  |
| Recommended rim width | W13           | Rolling circumference  | 4020 mm |
| Permitted rim width   | W11, W12(L)   | SRI                    | 650     |
| Alternative tyre size | 14.9 R 28     | Tread depth            | 43 mm   |
| EAN Tube              | 8714692239793 | 75% of the tyre volume | 175 l   |

|              |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |
|--------------|-----|----------------------------|------|------|------|------|------|------|------|
|              |     | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 |
|              |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |
| Speed (km/h) | 10L | 1995                       | 2375 | 2760 | 3190 | 3440 | 3645 | 3890 | 4170 |
|              | 10H | 1585                       | 1880 | 2205 | 2450 | 2600 | 2860 | 3105 |      |
|              | 25  | 1640                       | 1950 | 2285 | 2540 | 2695 | 2965 | 3220 |      |
|              | 30  | 1585                       | 1880 | 2205 | 2450 | 2600 | 2860 | 3105 |      |
|              | 40  |                            | 1755 | 2060 | 2290 | 2430 | 2670 | 2900 |      |
|              | 50  |                            | 1755 | 2060 | 2290 | 2430 | 2670 | 2900 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 420/85 R 28 139 A8/B TL Traxion 85

|                       |                       |                        |         |
|-----------------------|-----------------------|------------------------|---------|
| EAN                   | 8714692109812         | Section width          | 455 mm  |
| Nominal tyre pressure | 1,6 bar               | Overall diameter       | 1415 mm |
| Tyre construction     | Radial                | Static loaded radius   | 660 mm  |
| Recommended rim width | DW15L                 | Rolling circumference  | 4215 mm |
| Permitted rim width   | W13, W/DW14L,<br>W15L | SRI                    | 675     |
| Alternative tyre size | 16.9 R 28             | Tread depth            | 45 mm   |
| EAN Tube              | 8714692239809         | 75% of the tyre volume | 235 l   |

|              |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |
|--------------|-----|----------------------------|------|------|------|------|------|------|------|
|              |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|              |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |
| Speed (km/h) | 10L | 2005                       | 2275 | 2555 | 2825 | 3105 | 3325 | 3515 | 3725 |
|              | 10H | 1550                       | 1795 | 2040 | 2285 | 2455 | 2600 |      |      |
|              | 25  | 1605                       | 1865 | 2120 | 2370 | 2545 | 2695 |      |      |
|              | 30  | 1550                       | 1795 | 2040 | 2285 | 2455 | 2600 |      |      |
|              | 40  |                            | 1680 | 1910 | 2135 | 2295 | 2430 |      |      |
|              | 50  |                            | 1680 | 1910 | 2135 | 2295 | 2430 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 380/85 R 30 135 A8/B TL Traxion 85 II

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692336591              |      |      |      | Section width          |      | 390 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1410 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 645 mm  |      |
| Recommended rim width |     | W12                        |      |      |      | Rolling circumference  |      | 4150 mm |      |
| Permitted rim width   |     | W11, W13                   |      |      |      | SRI                    |      | 675     |      |
| Alternative tyre size |     | 14.9 R 30                  |      |      |      | Tread depth            |      | 43 mm   |      |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 230 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 1770                       | 2010 | 2260 | 2500 | 2745                   | 2940 | 3110    | 3295 |
|                       | 10H | 1370                       | 1590 | 1805 | 2020 | 2170                   | 2335 |         |      |
|                       | 25  | 1420                       | 1650 | 1875 | 2095 | 2250                   | 2420 |         |      |
|                       | 30  | 1370                       | 1590 | 1805 | 2020 | 2170                   | 2335 |         |      |
|                       | 40  |                            | 1485 | 1685 | 1890 | 2030                   | 2180 |         |      |
|                       | 50  |                            | 1485 | 1685 | 1890 | 2030                   | 2180 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 420/85 R 30 140 A8/B TL Traxion 85

|                       |     |                            |      |      |      |                        |      |         |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |     | 8714692109829              |      |      |      | Section width          |      | 455 mm  |      |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1470 mm |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 685 mm  |      |
| Recommended rim width |     | DW15L                      |      |      |      | Rolling circumference  |      | 4425 mm |      |
| Permitted rim width   |     | W13, W/DW14L,<br>W15L      |      |      |      | SRI                    |      | 700     |      |
| Alternative tyre size |     | 16.9 R 30                  |      |      |      | Tread depth            |      | 45 mm   |      |
| EAN Tube              |     | 8714692331381              |      |      |      | 75% of the tyre volume |      | 245 l   |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10L | 2070                       | 2345 | 2635 | 2915 | 3200                   | 3430 | 3625    | 3845 |
|                       | 10H | 1595                       | 1855 | 2105 | 2355 | 2530                   | 2675 |         |      |
|                       | 25  | 1655                       | 1920 | 2185 | 2445 | 2625                   | 2775 |         |      |
|                       | 30  | 1595                       | 1855 | 2105 | 2355 | 2530                   | 2675 |         |      |
|                       | 40  |                            | 1730 | 1970 | 2205 | 2365                   | 2500 |         |      |
|                       | 50  |                            | 1730 | 1970 | 2205 | 2365                   | 2500 |         |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 460/85 R 30 145 A8/B TL Traxion 85

|                       |                     |                        |         |
|-----------------------|---------------------|------------------------|---------|
| EAN                   | 8714692309809       | Section width          | 490 mm  |
| Nominal tyre pressure | 1,6 bar             | Overall diameter       | 1545 mm |
| Tyre construction     | Radial              | Static loaded radius   | 725 mm  |
| Recommended rim width | DW15L               | Rolling circumference  | 4605 mm |
| Permitted rim width   | DW13, W/DW14L, W15L | SRI                    | 725     |
| Alternative tyre size | 18.4 R 30           | Tread depth            | 47 mm   |
| EAN Tube              | 8714692331527       | 75% of the tyre volume | 330 l   |

|              |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |
|--------------|-----|----------------------------|------|------|------|------|------|------|------|
|              |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|              |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |
| Speed (km/h) | 10L | 2380                       | 2705 | 3035 | 3360 | 3690 | 3950 | 4175 | 4430 |
|              | 10H | 1840                       | 2135 | 2425 | 2715 | 2915 | 3105 |      |      |
|              | 25  | 1905                       | 2215 | 2515 | 2815 | 3025 | 3220 |      |      |
|              | 30  | 1840                       | 2135 | 2425 | 2715 | 2915 | 3105 |      |      |
|              | 40  |                            | 1995 | 2265 | 2535 | 2725 | 2900 |      |      |
|              | 50  |                            | 1995 | 2265 | 2535 | 2725 | 2900 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 380/85 R 34 137 A8/B TL Traxion 85 II

|                       |               |                        |         |
|-----------------------|---------------|------------------------|---------|
| EAN                   | 8714692336607 | Section width          | 390 mm  |
| Nominal tyre pressure | 1,6 bar       | Overall diameter       | 1505 mm |
| Tyre construction     | Radial        | Static loaded radius   | 680 mm  |
| Recommended rim width | W12           | Rolling circumference  | 4470 mm |
| Permitted rim width   | W11, W13      | SRI                    | 725     |
| Alternative tyre size | 14.9 R 34     | Tread depth            | 43 mm   |
|                       |               | 75% of the tyre volume | 250 l   |

|              |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |
|--------------|-----|----------------------------|------|------|------|------|------|------|------|
|              |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|              |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |
| Speed (km/h) | 10L | 1880                       | 2135 | 2395 | 2655 | 2915 | 3120 | 3300 | 3500 |
|              | 10H | 1455                       | 1685 | 1915 | 2145 | 2305 | 2460 |      |      |
|              | 25  | 1505                       | 1750 | 1990 | 2225 | 2390 | 2555 |      |      |
|              | 30  | 1455                       | 1685 | 1915 | 2145 | 2305 | 2460 |      |      |
|              | 40  |                            | 1575 | 1790 | 2005 | 2155 | 2300 |      |      |
|              | 50  |                            | 1575 | 1790 | 2005 | 2155 | 2300 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

| 420/85 R 34 142 A8/B TL Traxion 85 |     |                            |      |      |                        |      |         |      |      |
|------------------------------------|-----|----------------------------|------|------|------------------------|------|---------|------|------|
| EAN                                |     | 8714692109836              |      |      | Section width          |      | 455 mm  |      |      |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      | Overall diameter       |      | 1570 mm |      |      |
| Tyre construction                  |     | Radial                     |      |      | Static loaded radius   |      | 735 mm  |      |      |
| Recommended rim width              |     | DW15L                      |      |      | Rolling circumference  |      | 4700 mm |      |      |
| Permitted rim width                |     | W/DW13,                    |      |      | SRI                    |      | 750     |      |      |
|                                    |     | W/DW14L, W15L              |      |      | Tread depth            |      | 45 mm   |      |      |
| Alternative tyre size              |     | 16.9 R 34                  |      |      | 75% of the tyre volume |      | 265 l   |      |      |
| EAN Tube                           |     | 8714692331404              |      |      |                        |      |         |      |      |
|                                    |     | Tyre pressure (bar)        |      |      |                        |      |         |      |      |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20                   | 1,40 | 1,60    | 1,80 | 2,00 |
|                                    |     | Load capacity per tyre(kg) |      |      |                        |      |         |      |      |
| Speed (km/h)                       | 10L | 2190                       | 2485 | 2790 | 3090                   | 3395 | 3635    | 3845 | 4075 |
|                                    | 10H | 1690                       | 1965 | 2230 | 2495                   | 2680 | 2835    |      |      |
|                                    | 25  | 1755                       | 2035 | 2315 | 2590                   | 2785 | 2940    |      |      |
|                                    | 30  | 1690                       | 1965 | 2230 | 2495                   | 2680 | 2835    |      |      |
|                                    | 40  |                            | 1835 | 2085 | 2335                   | 2505 | 2650    |      |      |
|                                    | 50  |                            | 1835 | 2085 | 2335                   | 2505 | 2650    |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

| 460/85 R 34 147 A8/B TL Traxion 85 |     |                            |      |      |                        |      |         |      |      |
|------------------------------------|-----|----------------------------|------|------|------------------------|------|---------|------|------|
| EAN                                |     | 8714692109843              |      |      | Section width          |      | 490 mm  |      |      |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      | Overall diameter       |      | 1640 mm |      |      |
| Tyre construction                  |     | Radial                     |      |      | Static loaded radius   |      | 765 mm  |      |      |
| Recommended rim width              |     | DW16L                      |      |      | Rolling circumference  |      | 4915 mm |      |      |
| Permitted rim width                |     | W/DW14L,                   |      |      | SRI                    |      | 775     |      |      |
|                                    |     | W/DW15L, W16L              |      |      | Tread depth            |      | 48 mm   |      |      |
| Alternative tyre size              |     | 18.4 R 34                  |      |      | 75% of the tyre volume |      | 340 l   |      |      |
| EAN Tube                           |     | 8714692331411              |      |      |                        |      |         |      |      |
|                                    |     | Tyre pressure (bar)        |      |      |                        |      |         |      |      |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20                   | 1,40 | 1,60    | 1,80 | 2,00 |
|                                    |     | Load capacity per tyre(kg) |      |      |                        |      |         |      |      |
| Speed (km/h)                       | 10L | 2520                       | 2860 | 3210 | 3550                   | 3900 | 4180    | 4420 | 4685 |
|                                    | 10H | 1945                       | 2255 | 2565 | 2870                   | 3085 | 3290    |      |      |
|                                    | 25  | 2020                       | 2340 | 2660 | 2980                   | 3200 | 3415    |      |      |
|                                    | 30  | 1945                       | 2255 | 2565 | 2870                   | 3085 | 3290    |      |      |
|                                    | 40  |                            | 2110 | 2400 | 2685                   | 2885 | 3075    |      |      |
|                                    | 50  |                            | 2110 | 2400 | 2685                   | 2885 | 3075    |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# TRACTOR TYRES DRIVE RADIAL



| 340/85 R 38 133 A8/B TL Traxion 85 |     |                            |      |      |      |                        |      |         |      |  |
|------------------------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|
| EAN                                |     | 8714692109850              |      |      |      | Section width          |      | 360 mm  |      |  |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1550 mm |      |  |
| Tyre construction                  |     | Radial                     |      |      |      | Static loaded radius   |      | 730 mm  |      |  |
| Recommended rim width              |     | W12                        |      |      |      | Rolling circumference  |      | 4680 mm |      |  |
| Permitted rim width                |     | W11,DW12                   |      |      |      | SRI                    |      | 750     |      |  |
| Alternative tyre size              |     | 13.6 R 38                  |      |      |      | Tread depth            |      | 41 mm   |      |  |
| EAN Tube                           |     | 8714692331442              |      |      |      | 75% of the tyre volume |      | 170 l   |      |  |
|                                    |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |
|                                    |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |
| Speed (km/h)                       | 10L | 1685                       | 1910 | 2145 | 2375 | 2605                   | 2790 | 2955    | 3130 |  |
|                                    | 10H | 1300                       | 1510 | 1715 | 1920 | 2060                   | 2205 |         |      |  |
|                                    | 25  | 1350                       | 1565 | 1780 | 1990 | 2140                   | 2285 |         |      |  |
|                                    | 30  | 1300                       | 1510 | 1715 | 1920 | 2060                   | 2205 |         |      |  |
|                                    | 40  |                            | 1410 | 1600 | 1795 | 1925                   | 2060 |         |      |  |
|                                    | 50  |                            | 1410 | 1600 | 1795 | 1925                   | 2060 |         |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

| 380/80 R 38 142 A8/B TL Traxion 85 |     |                            |      |      |      |      |      |                        |      |         |      |      |      |  |
|------------------------------------|-----|----------------------------|------|------|------|------|------|------------------------|------|---------|------|------|------|--|
| EAN                                |     | 8714692327155              |      |      |      |      |      | Section width          |      | 390 mm  |      |      |      |  |
| Nominal tyre pressure              |     | 2,4 bar                    |      |      |      |      |      | Overall diameter       |      | 1580 mm |      |      |      |  |
| Tyre construction                  |     | Radial                     |      |      |      |      |      | Static loaded radius   |      | 735 mm  |      |      |      |  |
| Recommended rim width              |     | W12                        |      |      |      |      |      | Rolling circumference  |      | 4820 mm |      |      |      |  |
| Permitted rim width                |     | W11, W13                   |      |      |      |      |      | SRI                    |      | 750     |      |      |      |  |
| Alternative tyre size              |     | 14.9 R 38                  |      |      |      |      |      | Tread depth            |      | 43 mm   |      |      |      |  |
|                                    |     |                            |      |      |      |      |      | 75% of the tyre volume |      | 260 l   |      |      |      |  |
|                                    |     | Tyre pressure (bar)        |      |      |      |      |      |                        |      |         |      |      |      |  |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80                   | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 |  |
|                                    |     | Load capacity per tyre(kg) |      |      |      |      |      |                        |      |         |      |      |      |  |
| Speed (km/h)                       | 10L | 1890                       | 2145 | 2410 | 2665 | 2925 | 3135 | 3315                   | 3515 | 3660    | 3790 | 3945 | 3975 |  |
|                                    | 10H | 1460                       | 1695 | 1925 | 2155 | 2315 | 2460 | 2585                   | 2695 | 2795    | 2835 |      |      |  |
|                                    | 25  | 1515                       | 1755 | 1995 | 2235 | 2400 | 2555 | 2680                   | 2800 | 2895    | 2940 |      |      |  |
|                                    | 30  | 1460                       | 1695 | 1925 | 2155 | 2315 | 2460 | 2585                   | 2695 | 2795    | 2835 |      |      |  |
|                                    | 40  |                            | 1800 | 2015 | 2160 | 2300 | 2415 | 2520                   | 2610 | 2650    |      |      |      |  |
|                                    | 50  |                            | 1800 | 2015 | 2160 | 2300 | 2415 | 2520                   | 2610 | 2650    |      |      |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 420/85 R 38 144 A8/B TL Traxion 85

|                       |               |      |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692109867 |      | Section width              | 455 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar       |      | Overall diameter           | 1670 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 780 mm  |      |      |      |      |      |      |
| Recommended rim width | DW15L         |      | Rolling circumference      | 5035 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW14L, W15L |      | SRI                        | 800     |      |      |      |      |      |      |
| Alternative tyre size | 16.9 R 38     |      | Tread depth                | 45 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692331459 |      | 75% of the tyre volume     | 290 l   |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L           | 2310 | 2625                       | 2945    | 3260 | 3580 | 3835 | 4055 | 4295 |      |
|                       | 10H           | 1785 | 2070                       | 2355    | 2635 | 2830 | 2995 |      |      |      |
|                       | 25            | 1850 | 2150                       | 2440    | 2735 | 2935 | 3110 |      |      |      |
|                       | 30            | 1785 | 2070                       | 2355    | 2635 | 2830 | 2995 |      |      |      |
|                       | 40            |      | 1935                       | 2200    | 2460 | 2645 | 2800 |      |      |      |
|                       | 50            |      | 1935                       | 2200    | 2460 | 2645 | 2800 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 460/85 R 38 149 A8/B TL Traxion 85

|                       |                           |      |                            |         |      |      |      |      |      |      |
|-----------------------|---------------------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692109874             |      | Section width              | 490 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 1,6 bar                   |      | Overall diameter           | 1750 mm |      |      |      |      |      |      |
| Tyre construction     | Radial                    |      | Static loaded radius       | 815 mm  |      |      |      |      |      |      |
| Recommended rim width | DW16L                     |      | Rolling circumference      | 5205 mm |      |      |      |      |      |      |
| Permitted rim width   | W/DW14L,<br>W/DW15L, W16L |      | SRI                        | 825     |      |      |      |      |      |      |
| Alternative tyre size | 18.4 R 38                 |      | Tread depth                | 48 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692331466             |      | 75% of the tyre volume     | 365 l   |      |      |      |      |      |      |
|                       |                           |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |                           |      | 0,60                       | 0,80    | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|                       |                           |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10L                       | 2655 | 3010                       | 3380    | 3740 | 4110 | 4400 | 4655 | 4935 |      |
|                       | 10H                       | 2050 | 2380                       | 2705    | 3025 | 3250 | 3480 |      |      |      |
|                       | 25                        | 2125 | 2465                       | 2805    | 3140 | 3370 | 3610 |      |      |      |
|                       | 30                        | 2050 | 2380                       | 2705    | 3025 | 3250 | 3480 |      |      |      |
|                       | 40                        |      | 2220                       | 2525    | 2825 | 3035 | 3250 |      |      |      |
|                       | 50                        |      | 2220                       | 2525    | 2825 | 3035 | 3250 |      |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL

## 520/85 R 38 155 A8/B TL Traxion 85

|                       |                         |                        |         |
|-----------------------|-------------------------|------------------------|---------|
| EAN                   | 8714692109881           | Section width          | 555 mm  |
| Nominal tyre pressure | 1,6 bar                 | Overall diameter       | 1830 mm |
| Tyre construction     | Radial                  | Static loaded radius   | 850 mm  |
| Recommended rim width | DW18L                   | Rolling circumference  | 5465 mm |
| Permitted rim width   | DD16L,<br>W/DW16L, W18L | SRI                    | 875     |
| Alternative tyre size | 20.8 R 38               | Tread depth            | 52 mm   |
| EAN Tube              | 8714692331473           | 75% of the tyre volume | 490 l   |

|              |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |
|--------------|-----|----------------------------|------|------|------|------|------|------|------|
|              |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 |
|              |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |
| Speed (km/h) | 10L | 3200                       | 3635 | 4080 | 4515 | 4960 | 5315 | 5620 | 5955 |
|              | 10H | 2475                       | 2870 | 3260 | 3650 | 3920 | 4145 |      |      |
|              | 25  | 2565                       | 2975 | 3385 | 3785 | 4070 | 4300 |      |      |
|              | 30  | 2475                       | 2870 | 3260 | 3650 | 3920 | 4145 |      |      |
|              | 40  |                            | 2680 | 3050 | 3410 | 3665 | 3875 |      |      |
|              | 50  |                            | 2680 | 3050 | 3410 | 3665 | 3875 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 480/80 R 42 156 A8/B TL Traxion 85

|                       |                          |                        |         |
|-----------------------|--------------------------|------------------------|---------|
| EAN                   | 8714692327179            | Section width          | 500 mm  |
| Nominal tyre pressure | 2,4 bar                  | Overall diameter       | 1850 mm |
| Tyre construction     | Radial                   | Static loaded radius   | 855 mm  |
| Recommended rim width | DW16L                    | Rolling circumference  | 5600 mm |
| Permitted rim width   | DD16L, W16L,<br>W/DW16A* | SRI                    | 875     |
| Alternative tyre size | 18.4 R 42                | Tread depth            | 49 mm   |
|                       |                          | 75% of the tyre volume | 490 l   |

|              |     | Tyre pressure (bar)        |      |      |      |      |      |      |      |      |      |      |      |
|--------------|-----|----------------------------|------|------|------|------|------|------|------|------|------|------|------|
|              |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|              |     | Load capacity per tyre(kg) |      |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h) | 10L | 2820                       | 3200 | 3595 | 3980 | 4370 | 4680 | 4950 | 5245 | 5465 | 5655 | 5885 | 6000 |
|              | 10H | 2180                       | 2530 | 2875 | 3215 | 3455 | 3690 | 3860 | 4025 | 4170 | 4280 |      |      |
|              | 25  | 2260                       | 2620 | 2980 | 3335 | 3585 | 3830 | 4005 | 4175 | 4325 | 4440 |      |      |
|              | 30  | 2180                       | 2530 | 2875 | 3215 | 3455 | 3690 | 3860 | 4025 | 4170 | 4280 |      |      |
|              | 40  |                            |      | 2685 | 3005 | 3230 | 3450 | 3605 | 3760 | 3895 | 4000 |      |      |
|              | 50  |                            |      | 2685 | 3005 | 3230 | 3450 | 3605 | 3760 | 3895 | 4000 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES

## DRIVE RADIAL

### 520/85 R 42 157 A8/B TL Traxion 85

|                       |     |                            |      |      |      |                        |      |         |      |  |  |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|--|
| EAN                   |     | 8714692244544              |      |      |      | Section width          |      | 555 mm  |      |  |  |
| Nominal tyre pressure |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 1930 mm |      |  |  |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 905 mm  |      |  |  |
| Recommended rim width |     | DW18L                      |      |      |      | Rolling circumference  |      | 5785 mm |      |  |  |
| Permitted rim width   |     | DW16L, DD18L               |      |      |      | SRI                    |      | 925     |      |  |  |
| Alternative tyre size |     | 20.8 R 42                  |      |      |      | Tread depth            |      | 52 mm   |      |  |  |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 510 l   |      |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |  |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |  |
| Speed (km/h)          | 10L | 3355                       | 3810 | 4275 | 4730 | 5195                   | 5565 | 5885    | 6240 |  |  |
|                       | 10H | 2590                       | 3005 | 3415 | 3825 | 4105                   | 4415 |         |      |  |  |
|                       | 25  | 2685                       | 3120 | 3545 | 3965 | 4260                   | 4580 |         |      |  |  |
|                       | 30  | 2590                       | 3005 | 3415 | 3825 | 4105                   | 4415 |         |      |  |  |
|                       | 40  |                            | 2810 | 3195 | 3575 | 3840                   | 4125 |         |      |  |  |
|                       | 50  |                            | 2810 | 3195 | 3575 | 3840                   | 4125 |         |      |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

### 480/80 R 46 158 A8/B TL Traxion 85

|                       |     |                            |      |      |      |                        |      |         |      |      |      |      |      |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|------|------|
| EAN                   |     | 8714692327193              |      |      |      | Section width          |      | 500 mm  |      |      |      |      |      |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      | Overall diameter       |      | 1950 mm |      |      |      |      |      |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 900 mm  |      |      |      |      |      |
| Recommended rim width |     | DW16L                      |      |      |      | Rolling circumference  |      | 5885 mm |      |      |      |      |      |
| Permitted rim width   |     | DD16L, W16L,               |      |      |      | SRI                    |      | 925     |      |      |      |      |      |
| Alternative tyre size |     | W/DW16A*                   |      |      |      | Tread depth            |      | 49 mm   |      |      |      |      |      |
|                       |     | 18.4 R 46                  |      |      |      | 75% of the tyre volume |      | 525 l   |      |      |      |      |      |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |      |      |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |      |      |
| Speed (km/h)          | 10L | 2950                       | 3350 | 3760 | 4160 | 4570                   | 4895 | 5175    | 5490 | 5720 | 5915 | 6155 | 6375 |
|                       | 10H | 2280                       | 2645 | 3005 | 3365 | 3615                   | 3800 | 4035    | 4210 | 4360 | 4550 |      |      |
|                       | 25  | 2365                       | 2745 | 3120 | 3490 | 3750                   | 3940 | 4190    | 4370 | 4525 | 4720 |      |      |
|                       | 30  | 2280                       | 2645 | 3005 | 3365 | 3615                   | 3800 | 4035    | 4210 | 4360 | 4550 |      |      |
|                       | 40  |                            |      | 2810 | 3145 | 3375                   | 3550 | 3775    | 3935 | 4075 | 4250 |      |      |
|                       | 50  |                            |      | 2810 | 3145 | 3375                   | 3550 | 3775    | 3935 | 4075 | 4250 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE RADIAL



| 520/85 R 46 158 A8/B TL Traxion 85 |     |                            |      |      |      |                        |      |         |      |  |
|------------------------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|--|
| EAN                                |     | 8714692244544              |      |      |      | Section width          |      | 535 mm  |      |  |
| Nominal tyre pressure              |     | 1,6 bar                    |      |      |      | Overall diameter       |      | 2050 mm |      |  |
| Tyre construction                  |     | Radial                     |      |      |      | Static loaded radius   |      | 930 mm  |      |  |
| Recommended rim width              |     | DW16L                      |      |      |      | Rolling circumference  |      | 6150 mm |      |  |
| Permitted rim width                |     | DW18L                      |      |      |      | SRI                    |      | 975     |      |  |
| Alternative tyre size              |     | 20.8 R 46                  |      |      |      | Tread depth            |      | 51 mm   |      |  |
|                                    |     |                            |      |      |      | 75% of the tyre volume |      | 650 l   |      |  |
|                                    |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 |  |
|                                    |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |
| Speed (km/h)                       | 10L | 3505                       | 3975 | 4465 | 4940 | 5425                   | 5810 | 6145    | 6515 |  |
|                                    | 10H | 2705                       | 3140 | 3570 | 3995 | 4290                   | 4550 |         |      |  |
|                                    | 25  | 2805                       | 3255 | 3705 | 4145 | 4450                   | 4720 |         |      |  |
|                                    | 30  | 2705                       | 3140 | 3570 | 3995 | 4290                   | 4550 |         |      |  |
|                                    | 40  |                            | 2935 | 3335 | 3735 | 4010                   | 4250 |         |      |  |
|                                    | 50  |                            | 2935 | 3335 | 3735 | 4010                   | 4250 |         |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

| 480/80 R 50 159 A8/B TL Traxion 85 |     |                            |      |      |      |      |                        |      |         |      |      |      |      |
|------------------------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|------|------|------|
| EAN                                |     | 8714692327216              |      |      |      |      | Section width          |      | 500 mm  |      |      |      |      |
| Nominal tyre pressure              |     | 2,4 bar                    |      |      |      |      | Overall diameter       |      | 2045 mm |      |      |      |      |
| Tyre construction                  |     | Radial                     |      |      |      |      | Static loaded radius   |      | 950 mm  |      |      |      |      |
| Recommended rim width              |     | DW16L                      |      |      |      |      | Rolling circumference  |      | 6225 mm |      |      |      |      |
| Permitted rim width                |     | DWL14L,<br>W/DW15L, W16L   |      |      |      |      | SRI                    |      | 975     |      |      |      |      |
| Alternative tyre size              |     | 18.4 R 50                  |      |      |      |      | Tread depth            |      | 49 mm   |      |      |      |      |
|                                    |     |                            |      |      |      |      | 75% of the tyre volume |      | 550 l   |      |      |      |      |
|                                    |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |      |      |      |
|                                    |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80 | 2,00    | 2,20 | 2,40 | 2,60 | 2,80 |
|                                    |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |      |      |      |
| Speed (km/h)                       | 10L | 3080                       | 3495 | 3925 | 4340 | 4770 | 5105                   | 5400 | 5725    | 5965 | 6175 | 6425 | 6565 |
|                                    | 10H | 2375                       | 2760 | 3135 | 3510 | 3770 | 4015                   | 4210 | 4395    | 4550 | 4680 |      |      |
|                                    | 25  | 2465                       | 2860 | 3255 | 3640 | 3910 | 4165                   | 4370 | 4560    | 4720 | 4855 |      |      |
|                                    | 30  | 2375                       | 2760 | 3135 | 3510 | 3770 | 4015                   | 4210 | 4395    | 4550 | 4680 |      |      |
|                                    | 40  |                            |      | 2930 | 3280 | 3525 | 3750                   | 3935 | 4105    | 4250 | 4375 |      |      |
|                                    | 50  |                            |      | 2930 | 3280 | 3525 | 3750                   | 3935 | 4105    | 4250 | 4375 |      |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE BIAS —



## FAKTOR-S

THE PERFECT CHOICE  
FOR LIGHT TRACTORS

### FEATURES

Strong nylon carcass

Wide, long cleats

Sturdy sidewall structure

### BENEFITS






Durability, reliability and stability

Very comfortable ride

Resistance to external damage



# FAKTOR-S

| Ø  | Tyre size | TT/TL | PR | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-----------|-------|----|---------------------|----------------------------------|---|--|--|--|--|------|
| 24 | 9.5 - 24  | TT    | 8  | 112 A8              | 2,8                              | W8  | 240  | 1050   | 490  | 3150   | 88   |
|    | 11.2 - 24 | TT    | 8  | 116 A8              | 2,4                              | DW10  | 290  | 1100   | 515  | 3305   | 88   |
|    | 12.4 - 24 | TT    | 8  | 121 A8              | 2,3                              | W11   | 315  | 1160   | 540  | 3475   | 88   |
|    | 13.6 - 24 | TT    | 8  | 123 A8              | 2,0                              | W12   | 345  | 1205   | 560  | 3615   | 88   |
|    | 14.9 - 24 | TT    | 8  | 128 A8              | 1,8                              | W13   | 375  | 1260   | 590  | 3780   | 88   |
| 28 | 11.2 - 28 | TT    | 8  | 118 A8              | 2,4                              | DW10  | 285  | 1205   | 560  | 3615   | 89   |
|    | 12.4 - 28 | TT    | 8  | 123 A8              | 2,3                              | W11   | 315  | 1260   | 590  | 3780   | 89   |
|    | 13.6 - 28 | TT    | 8  | 125 A8              | 2,0                              | W12   | 340  | 1305   | 610  | 3920   | 89   |
|    | 14.9 - 28 | TT    | 8  | 130 A8              | 1,8                              | W13   | 375  | 1360   | 635  | 4080   | 89   |
|    | 16.9 - 28 | TT    | 10 | 139 A8              | 2,0                              | DW15L   | 430  | 1435   | 670  | 4305   | 89   |
| 30 | 16.9 - 30 | TT    | 8  | 137 A8              | 1,7                              | DW15L   | 430  | 1485   | 690  | 4450   | 90   |
|    | 18.4 - 30 | TT    | 12 | 149 A8              | 1,4                              | DW16L   | 465  | 1545   | 720  | 4630   | 90   |
| 32 | 12.4 - 32 | TT    | 8  | 125 A8              | 2,2                              | W11   | 315  | 1360   | 635  | 4080   | 90   |
| 34 | 16.9 - 34 | TT    | 8  | 139 A8              | 1,7                              | DW15L   | 430  | 1580   | 735  | 4745   | 90   |
|    | 18.4 - 34 | TT    | 8  | 142 A8              | 1,4                              | DW16L   | 465  | 1645   | 765  | 4940   | 90   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES DRIVE BIAS —

## 9.5 - 24 8 PR / 112 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692291920 | Section width            | 240 mm  |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 1050 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 490 mm  |
| Recommended rim width | W8            | Rolling circumference    | 3150 mm |
| Permitted rim width   | W7            | Load capacity at 10 km/h | 1800 kg |
| Tread depth           | 29 mm         | Load capacity at 30 km/h | 1200 kg |
| EAN Tube              | 8714692320576 | Load capacity at 40 km/h | 1120 kg |

## 11.2 - 24 8 PR / 116 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692291937 | Section width            | 290 mm  |
| Nominal tyre pressure | 2,4 bar       | Overall diameter         | 1100 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 515 mm  |
| Recommended rim width | DW10          | Rolling circumference    | 3305 mm |
| Permitted rim width   | W9, W10       | Load capacity at 10 km/h | 2010 kg |
| Tread depth           | 29 mm         | Load capacity at 30 km/h | 1340 kg |
| EAN Tube              | 8714692285646 | Load capacity at 40 km/h | 1250 kg |

## 12.4 - 24 8 PR / 121 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692291944 | Section width            | 315 mm  |
| Nominal tyre pressure | 2,3 bar       | Overall diameter         | 1160 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 540 mm  |
| Recommended rim width | W11           | Rolling circumference    | 3475 mm |
| Permitted rim width   | W9, W/DW10    | Load capacity at 10 km/h | 2325 kg |
| Tread depth           | 33 mm         | Load capacity at 30 km/h | 1550 kg |
| EAN Tube              | 8714692285653 | Load capacity at 40 km/h | 1450 kg |

## 13.6 - 24 8 PR / 123 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692319686 | Section width            | 345 mm  |
| Nominal tyre pressure | 2,0 bar       | Overall diameter         | 1205 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 560 mm  |
| Recommended rim width | W12           | Rolling circumference    | 3615 mm |
| Permitted rim width   | W11, W12L     | Load capacity at 10 km/h | 2490 kg |
| Tread depth           | 36 mm         | Load capacity at 30 km/h | 1660 kg |
| EAN Tube              | 8714692285660 | Load capacity at 40 km/h | 1550 kg |

## 14.9 - 24 8 PR / 128 A8 TT FAKTOR-S

|                       |                      |                          |         |
|-----------------------|----------------------|--------------------------|---------|
| EAN                   | 8714692291951        | Section width            | 375 mm  |
| Nominal tyre pressure | 1,8 bar              | Overall diameter         | 1260 mm |
| Tyre construction     | Diagonaal            | Static loaded radius     | 590 mm  |
| Recommended rim width | W13                  | Rolling circumference    | 3780 mm |
| Permitted rim width   | W11, W12(L), DW13(L) | Load capacity at 10 km/h | 2890 kg |
| Tread depth           | 36 mm                | Load capacity at 30 km/h | 1925 kg |
| EAN Tube              | 8714692285677        | Load capacity at 40 km/h | 1800 kg |



# TRACTOR TYRES — DRIVE BIAS

## 11.2 - 28 8 PR / 118 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692291968 | Section width            | 285 mm  |
| Nominal tyre pressure | 2,4 bar       | Overall diameter         | 1205 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 560 mm  |
| Recommended rim width | DW10          | Rolling circumference    | 3615 mm |
| Permitted rim width   | W9, W10       | Load capacity at 10 km/h | 2115 kg |
| Tread depth           | 34 mm         | Load capacity at 30 km/h | 1410 kg |
| EAN Tube              | 8714692285684 | Load capacity at 40 km/h | 1320 kg |

## 12.4 - 28 8 PR / 123 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692291975 | Section width            | 315 mm  |
| Nominal tyre pressure | 2,3 bar       | Overall diameter         | 1260 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 590 mm  |
| Recommended rim width | W11           | Rolling circumference    | 3780 mm |
| Permitted rim width   | W9, W/DW10    | Load capacity at 10 km/h | 2490 kg |
| Tread depth           | 33 mm         | Load capacity at 30 km/h | 1660 kg |
| EAN Tube              | 8714692285691 | Load capacity at 40 km/h | 1550 kg |

## 13.6 - 28 8 PR / 125 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692291982 | Section width            | 340 mm  |
| Nominal tyre pressure | 2,0 bar       | Overall diameter         | 1305 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 610 mm  |
| Recommended rim width | W12           | Rolling circumference    | 3920 mm |
| Permitted rim width   | W11, W12L     | Load capacity at 10 km/h | 2650 kg |
| Tread depth           | 36 mm         | Load capacity at 30 km/h | 1765 kg |
| EAN Tube              | 8714692285707 | Load capacity at 40 km/h | 1650 kg |

## 14.9 - 28 8 PR / 130 A8 TT FAKTOR-S

|                       |                      |                          |         |
|-----------------------|----------------------|--------------------------|---------|
| EAN                   | 8714692291999        | Section width            | 375 mm  |
| Nominal tyre pressure | 1,8 bar              | Overall diameter         | 1360 mm |
| Tyre construction     | Diagonaal            | Static loaded radius     | 635 mm  |
| Recommended rim width | W13                  | Rolling circumference    | 4080 mm |
| Permitted rim width   | W11, W12(L), DW13(L) | Load capacity at 10 km/h | 3055 kg |
| Tread depth           | 36 mm                | Load capacity at 30 km/h | 2035 kg |
| EAN Tube              | 8714692285714        | Load capacity at 40 km/h | 1900 kg |

## 16.9 - 28 10 PR / 139 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692322273 | Section width            | 430 mm  |
| Nominal tyre pressure | 2,0 bar       | Overall diameter         | 1435 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 670 mm  |
| Recommended rim width | DW15L         | Rolling circumference    | 4305 mm |
| Permitted rim width   | WDW14L, W15L  | Load capacity at 10 km/h | 3900 kg |
| Tread depth           | 37 mm         | Load capacity at 30 km/h | 2600 kg |
| EAN Tube              | 8714692331374 | Load capacity at 40 km/h | 2430 kg |

# TRACTOR TYRES DRIVE BIAS —

## 16.9 - 30 8 PR / 137 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692292002 | Section width            | 430 mm  |
| Nominal tyre pressure | 1,7 bar       | Overall diameter         | 1485 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 690 mm  |
| Recommended rim width | DW15L         | Rolling circumference    | 4450 mm |
| Permitted rim width   | W/DW14L, W15L | Load capacity at 10 km/h | 3690 kg |
| Tread depth           | 39 mm         | Load capacity at 30 km/h | 2460 kg |
| EAN Tube              | 8714692239816 | Load capacity at 40 km/h | 2300 kg |

## 18.4 - 30 12 PR / 149 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692292026 | Section width            | 465 mm  |
| Nominal tyre pressure | 2,3 bar       | Overall diameter         | 1545 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 720 mm  |
| Recommended rim width | DW16L         | Rolling circumference    | 4630 mm |
| Permitted rim width   | W/DW15L, W16L | Load capacity at 10 km/h | 5220 kg |
| Tread depth           | 41 mm         | Load capacity at 30 km/h | 3480 kg |
| EAN Tube              | 8714692320583 | Load capacity at 40 km/h | 3250 kg |

## 12.4 - 32 8 PR / 125 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692292033 | Section width            | 315 mm  |
| Nominal tyre pressure | 2,2 bar       | Overall diameter         | 1360 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 635 mm  |
| Recommended rim width | W11           | Rolling circumference    | 4080 mm |
| Permitted rim width   | W9, W/DW10    | Load capacity at 10 km/h | 2650 kg |
| Tread depth           | 33 mm         | Load capacity at 30 km/h | 1765 kg |
| EAN Tube              | 8714692239823 | Load capacity at 40 km/h | 1650 kg |

## 16.9 - 34 8 PR / 139 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692292040 | Section width            | 430 mm  |
| Nominal tyre pressure | 1,7 bar       | Overall diameter         | 1580 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 735 mm  |
| Recommended rim width | DW15L         | Rolling circumference    | 4745 mm |
| Permitted rim width   | W/DW14L, W15L | Load capacity at 10 km/h | 3900 kg |
| Tread depth           | 39 mm         | Load capacity at 30 km/h | 2600 kg |
| EAN Tube              | 8714692239830 | Load capacity at 40 km/h | 2430 kg |

## 18.4 - 34 8 PR / 142 A8 TT FAKTOR-S

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692292057 | Section width            | 465 mm  |
| Nominal tyre pressure | 1,4 bar       | Overall diameter         | 1645 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 765 mm  |
| Recommended rim width | DW16L         | Rolling circumference    | 4940 mm |
| Permitted rim width   | W/DW15L, W16L | Load capacity at 10 km/h | 4255 kg |
| Tread depth           | 41 mm         | Load capacity at 30 km/h | 2835 kg |
| EAN Tube              | 8714692239847 | Load capacity at 40 km/h | 2650 kg |

# TRACTOR TYRES — DRIVE BIAS



# TRACTOR TYRES FRONT



## MULTI RILL




FRONT TYRE FOR  
GRASS AND CROP

### FEATURES

- Ribbed tread
- Wide, longitudinal grooves
- Rounded contour

### BENEFITS

- Good self-cleaning
- Excellent course stability
- Prevents damage to the grass

| Ø    | Tyre size      | TT/TL | PR | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm | Pag. |
|------|----------------|-------|----|---------------------|----------------------------------|---|--|--|--|------|
| 15.3 | 11.5/80 - 15.3 | TT    | 8  | 119 A8              | 2,7                              | 9.00  | 300  | 875  | 400  | 93   |
| 16   | 5.50 - 16      | TT    | 6  | 86 A8               | 3,8                              | 4.00E   | 160  | 720  | 340  | 93   |
|      | 6.00 - 16      | TT    | 6  | 88 A8               | 3,4                              | 4.50E   | 175  | 750  | 355  | 93   |
|      | 6.50 - 16      | TT    | 6  | 91 A8               | 3,2                              | 4.50E   | 185  | 780  | 375  | 93   |
|      | 7.50 - 16      | TT    | 6  | 98 A8               | 2,8                              | 5.50F   | 210  | 825  | 390  | 93   |
|      | 7.50 - 16      | TT    | 8  | 103 A8              | 3,8                              | 5.50F   | 210  | 825  | 390  | 94   |
|      | 9.00 - 16      | TT    | 10 | 116 A8              | 4,0                              | W8  | 265  | 885  | 420  | 94   |
|      | 10.00 - 16     | TT    | 8  | 115 A8              | 2,8                              | W8  | 285  | 915  | 430  | 94   |
|      | 11.00 - 16     | TT    | 10 | 122 A8              | 3,2                              | W10L  | 330  | 990  | 465  | 94   |
| 18   | 7.50 - 18      | TT    | 8  | 106 A8              | 3,8                              | 5.50F   | 215  | 880  | 415  | 94   |
| 19   | 6.00 - 19      | TT    | 6  | 93 A8               | 3,4                              | 4.50E   | 170  | 830  | 390  | 95   |
| 20   | 7.50 - 20      | TT    | 8  | 109 A8              | 3,4                              | 5.50F   | 215  | 935  | 445  | 95   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# MULTI RILL

## 11.5/80 - 15.3 8 PR / 119 A8 TT MULTI RILL

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692051814 | Section width            | 300 mm  |
| Nominal tyre pressure | 2,7 bar       | Overall diameter         | 875 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 400 mm  |
| Recommended rim width | 9.00          | Load capacity at 30 km/h | 1510 kg |
| Permitted rim width   |               | Load capacity at 40 km/h | 1360 kg |
| EAN Tube              | 8714692239014 | Tread depth              | 18 mm   |

## 5.50 - 16 6 PR / 86 A8 TT MULTI RILL

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692051852 | Section width            | 160 mm |
| Nominal tyre pressure | 3,8 bar       | Overall diameter         | 720 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 340 mm |
| Recommended rim width | 4.00E         | Load capacity at 30 km/h | 590 kg |
| Permitted rim width   | 3.50D, 4.50E  | Load capacity at 40 km/h | 530 kg |
| EAN Tube              | 8714692239137 | Tread depth              | 15 mm  |

## 6.00 - 16 6 PR / 88 A8 TT MULTI RILL

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692051876 | Section width            | 175 mm |
| Nominal tyre pressure | 3,4 bar       | Overall diameter         | 750 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 355 mm |
| Recommended rim width | 4.50E         | Load capacity at 30 km/h | 620 kg |
| Permitted rim width   | 4.00E, 5.00F  | Load capacity at 40 km/h | 560 kg |
| EAN Tube              | 8714692239137 | Tread depth              | 16 mm  |

## 6.50 - 16 6 PR / 91 A8 TT MULTI RILL

|                       |                     |                          |        |
|-----------------------|---------------------|--------------------------|--------|
| EAN                   | 8714692051890       | Section width            | 185 mm |
| Nominal tyre pressure | 3,2 bar             | Overall diameter         | 780 mm |
| Tyre construction     | Diagonaal           | Static loaded radius     | 375 mm |
| Recommended rim width | 4.50E               | Load capacity at 30 km/h | 680 kg |
| Permitted rim width   | 4.00E, 5.00F, 5.50F | Load capacity at 40 km/h | 615 kg |
| EAN Tube              | 8714692239144       | Tread depth              | 18 mm  |

## 7.50 - 16 6 PR / 98 A8 TT MULTI RILL

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692051913 | Section width            | 210 mm |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 825 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 390 mm |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 830 kg |
| Permitted rim width   | 5.00F, 6.00F  | Load capacity at 40 km/h | 750 kg |
| EAN Tube              | 8714692239151 | Tread depth              | 20 mm  |



# TRACTOR TYRES

## FRONT

### 7.50 - 16 8 PR / 103 A8 TT MULTI RILL

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692051937 | Section width            | 210 mm |
| Nominal tyre pressure | 3,8 bar       | Overall diameter         | 825 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 390 mm |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 970 kg |
| Permitted rim width   | 5.00F, 6.00F  | Load capacity at 40 km/h | 875 kg |
| EAN Tube              | 8714692239151 | Tread depth              | 20 mm  |

### 9.00 - 16 10 PR / 116 A8 TT MULTI RILL

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692051951 | Section width            | 265 mm  |
| Nominal tyre pressure | 4,0 bar       | Overall diameter         | 885 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 420 mm  |
| Recommended rim width | W8            | Load capacity at 30 km/h | 1385 kg |
| Permitted rim width   | 6.00F, W8L    | Load capacity at 40 km/h | 1250 kg |
| EAN Tube              | 8714692239168 | Tread depth              | 22 mm   |

### 10.00 - 16 8 PR / 115 A8 TT MULTI RILL

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692051975 | Section width            | 285 mm  |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 915 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 430 mm  |
| Recommended rim width | W8            | Load capacity at 30 km/h | 1350 kg |
| Permitted rim width   | W8L           | Load capacity at 40 km/h | 1215 kg |
| EAN Tube              | 8714692239175 | Tread depth              | 24 mm   |

### 11.00 - 16 10 PR / 122 A8 TT MULTI RILL

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692051999 | Section width            | 330 mm  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter         | 990 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 465 mm  |
| Recommended rim width | W10L          | Load capacity at 30 km/h | 1665 kg |
| Permitted rim width   | W8, W8L       | Load capacity at 40 km/h | 1500 kg |
| EAN Tube              | 8714692239182 | Tread depth              | 26 mm   |

### 7.50 - 18 8 PR / 106 A8 TT MULTI RILL

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692052033 | Section width            | 215 mm  |
| Nominal tyre pressure | 3,8 bar       | Overall diameter         | 880 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 415 mm  |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 1055 kg |
| Permitted rim width   |               | Load capacity at 40 km/h | 950 kg  |
| EAN Tube              | 8714692239199 | Tread depth              | 21 mm   |

# TRACTOR TYRES FRONT

## 6.00 - 19 6 PR / 93 A8 TT MULTI RILL

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692052057 | Section width            | 170 mm |
| Nominal tyre pressure | 3,4 bar       | Overall diameter         | 830 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 390 mm |
| Recommended rim width | 4.50E         | Load capacity at 30 km/h | 720 kg |
| Permitted rim width   | 4.00E, 5.00F  | Load capacity at 40 km/h | 650 kg |
| EAN Tube              | 8714692239700 | Tread depth              | 16 mm  |

## 7.50 - 20 8 PR / 109 A8 TT MULTI RILL

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692052071 | Section width            | 215 mm  |
| Nominal tyre pressure | 3,4 bar       | Overall diameter         | 935 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 445 mm  |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 1145 kg |
| Permitted rim width   | 5.00F         | Load capacity at 40 km/h | 1030 kg |
| EAN Tube              | 8714692239717 | Tread depth              | 21 mm   |



# TRACTOR TYRES FRONT



## LUG RING





FRONT TYRE FOR  
LAND AND ROAD

### FEATURES

- Robust shoulder bars
- Wide tread
- Good rolling capacity

### BENEFITS

- Protection against punctures
- Large tread surface
- Also suitable for planting & sowing machines

| Ø  | Tyre size | TT/TL | PR | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm | Pag. |
|----|-----------|-------|----|---------------------|----------------------------------|---|--|--|--|------|
| 16 | 5.50 - 16 | TT    | 6  | 86 A8               | 3,75                             | 4.00E   | 160  | 720  | 340  | 97   |
|    | 6.00 - 16 | TT    | 6  | 88 A8               | 3,40                             | 4.50E   | 175  | 750  | 355  | 97   |
|    | 6.50 - 16 | TT    | 6  | 91 A8               | 3,20                             | 4.50E   | 185  | 780  | 375  | 97   |
|    | 7.50 - 16 | TT    | 6  | 98 A8               | 2,80                             | 5.50F   | 210  | 825  | 390  | 97   |
| 18 | 7.50 - 18 | TT    | 6  | 101 A8              | 2,75                             | 5.50F   | 215  | 880  | 415  | 97   |
|    | 7.50 - 18 | TT    | 8  | 106 A8              | 3,75                             | 5.50F   | 215  | 880  | 415  | 98   |
| 19 | 6.00 - 19 | TT    | 6  | 93 A8               | 3,40                             | 4.50E   | 170  | 830  | 390  | 98   |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# LUG RING

## 5.50 - 16 6 PR / 86 A8 TT LUG RING

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692052095 | Section width            | 160 mm |
| Nominal tyre pressure | 3,8 bar       | Overall diameter         | 720 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 340 mm |
| Recommended rim width | 4.00E         | Load capacity at 30 km/h | 590 kg |
| Permitted rim width   | 3.50D, 4.50E  | Load capacity at 40 km/h | 530 kg |
| EAN Tube              | 8714692239137 | Tread depth              | 13 mm  |

## 6.00 - 16 6 PR / 88 A8 TT LUG RING

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692052118 | Section width            | 175 mm |
| Nominal tyre pressure | 3,4 bar       | Overall diameter         | 750 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 355 mm |
| Recommended rim width | 4.50E         | Load capacity at 30 km/h | 620 kg |
| Permitted rim width   | 4.00E, 5.00F  | Load capacity at 40 km/h | 560 kg |
| EAN Tube              | 8714692239137 | Tread depth              | 15 mm  |

## 6.50 - 16 6 PR / 91 A8 TT LUG RING

|                       |                     |                          |        |
|-----------------------|---------------------|--------------------------|--------|
| EAN                   | 8714692052132       | Section width            | 185 mm |
| Nominal tyre pressure | 3,2 bar             | Overall diameter         | 780 mm |
| Tyre construction     | Diagonaal           | Static loaded radius     | 375 mm |
| Recommended rim width | 4.50E               | Load capacity at 30 km/h | 680 kg |
| Permitted rim width   | 4.00E, 5.00F, 5.50F | Load capacity at 40 km/h | 615 kg |
| EAN Tube              | 8714692239144       | Tread depth              | 17 mm  |

## 7.50 - 16 6 PR / 98 A8 TT LUG RING

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692052156 | Section width            | 210 mm |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 825 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 390 mm |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 830 kg |
| Permitted rim width   | 5.00F, 6.00F  | Load capacity at 40 km/h | 750 kg |
| EAN Tube              | 8714692239151 | Tread depth              | 20 mm  |

## 7.50 - 18 6 PR / 101 A8 TT LUG RING

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692052170 | Section width            | 215 mm |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 880 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 415 mm |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 915 kg |
| Permitted rim width   |               | Load capacity at 40 km/h | 825 kg |
| EAN Tube              | 8714692239199 | Tread depth              | 20 mm  |

# TRACTOR TYRES

## FRONT

### 7.50 - 18 8 PR / 106 A8 TT LUG RING

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692052194 | Section width            | 215 mm  |
| Nominal tyre pressure | 3,8 bar       | Overall diameter         | 880 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 415 mm  |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 1055 kg |
| Permitted rim width   |               | Load capacity at 40 km/h | 950 kg  |
| EAN Tube              | 8714692239199 | Tread depth              | 20 mm   |

### 6.00 - 19 6 PR / 93 A8 TT LUG RING

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692052217 | Section width            | 170 mm |
| Nominal tyre pressure | 3,4 bar       | Overall diameter         | 830 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 390 mm |
| Recommended rim width | 4.50E         | Load capacity at 30 km/h | 720 kg |
| Permitted rim width   | 4.00E, 5.00F  | Load capacity at 40 km/h | 650 kg |
| EAN Tube              | 8714692239700 | Tread depth              | 15 mm  |



## FAKTOR-F

THE TRACTOR FRONT TYRE  
FOR THE COST CONSCIOUS FARMER







### FEATURES

- Wide longitudinal grooves
- Strong nylon carcass
- A8-rated

### BENEFITS

- Good self-cleaning
- Good resistance to peak loads, e.g. using front loader
- Suitable for driving speeds up to 40 km/h

| Ø  | Tyre size  | TT/TL | PR | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm | Pag. |
|----|------------|-------|----|---------------------|----------------------------------|---|--|--|--|------|
| 15 | 5.00 - 15  | TT    | 6  | 82 A8               | 3,70                             | 4.00E   | 140  | 655  | 305  | 100  |
| 16 | 5.50 - 16  | TT    | 6  | 86 A8               | 3,70                             | 4.00E   | 155  | 715  | 335  | 100  |
|    | 6.00 - 16  | TT    | 8  | 94 A8               | 4,50                             | 4.50E   | 170  | 735  | 345  | 100  |
|    | 6.50 - 16  | TT    | 8  | 98 A8               | 4,20                             | 4.50E   | 180  | 765  | 355  | 100  |
|    | 7.50 - 16  | TT    | 8  | 103 A8              | 3,70                             | 5.50F   | 205  | 810  | 380  | 100  |
|    | 10.00 - 16 | TT    | 8  | 115 A8              | 2,80                             | W8  | 280  | 905  | 425  | 101  |
|    | 11.00 - 16 | TT    | 10 | 122 A8              | 3,10                             | W10L  | 330  | 975  | 455  | 101  |
| 18 | 7.50 - 18  | TT    | 8  | 106 A8              | 3,65                             | 5.50F   | 205  | 860  | 400  | 101  |
| 19 | 4.00 - 19  | TT    | 4  | 72 A8               | 3,40                             | 3.00D   | 110  | 715  | 335  | 101  |
| 20 | 7.50 - 20  | TT    | 8  | 109 A8              | 3,40                             | 5.50F   | 205  | 915  | 425  | 101  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# TRACTOR TYRES

## FRONT

### 5.00 - 15 6 PR / 82 A8 TT FAKTOR-F

|                       |                 |                          |        |
|-----------------------|-----------------|--------------------------|--------|
| EAN                   | 8714692335075   | Section width            | 140 mm |
| Nominal tyre pressure | 3,7 bar         | Overall diameter         | 655 mm |
| Tyre construction     | Diagonaal       | Static loaded radius     | 305 mm |
| Recommended rim width | 4.00E           | Load capacity at 30 km/h | 525 kg |
| Permitted rim width   | 3.00D, 4J, 4.5J | Load capacity at 40 km/h | 475 kg |
|                       |                 | Tread depth              | 11 mm  |

### 5.50 - 16 6 PR / 86 A8 TT FAKTOR-F

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692327278 | Section width            | 155 mm |
| Nominal tyre pressure | 3,7 bar       | Overall diameter         | 715 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 335 mm |
| Recommended rim width | 4.00E         | Load capacity at 30 km/h | 585 kg |
| Permitted rim width   | 3.50D, 4.50E  | Load capacity at 40 km/h | 530 kg |
| EAN Tube              | 8714692239137 | Tread depth              | 13 mm  |

### 6.00 - 16 8 PR / 94 A8 TT FAKTOR-F

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692327315 | Section width            | 170 mm |
| Nominal tyre pressure | 4,5 bar       | Overall diameter         | 735 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 345 mm |
| Recommended rim width | 4.50E         | Load capacity at 30 km/h | 740 kg |
| Permitted rim width   | 4.00E, 5.00F  | Load capacity at 40 km/h | 670 kg |
| EAN Tube              | 8714692239137 | Tread depth              | 13 mm  |

### 6.50 - 16 8 PR / 98 A8 TT FAKTOR-F

|                       |                     |                          |        |
|-----------------------|---------------------|--------------------------|--------|
| EAN                   | 8714692335082       | Section width            | 180 mm |
| Nominal tyre pressure | 4,2 bar             | Overall diameter         | 765 mm |
| Tyre construction     | Diagonaal           | Static loaded radius     | 355 mm |
| Recommended rim width | 4.50E               | Load capacity at 30 km/h | 830 kg |
| Permitted rim width   | 4.00E, 5.00F, 5.50F | Load capacity at 40 km/h | 750 kg |
| EAN Tube              | 8714692239144       | Tread depth              | 16 mm  |

### 7.50 - 16 8 PR / 103 A8 TT FAKTOR-F

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692327353 | Section width            | 205 mm |
| Nominal tyre pressure | 3,7 bar       | Overall diameter         | 810 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 380 mm |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 970 kg |
| Permitted rim width   | 5.00F, 6.00F  | Load capacity at 40 km/h | 875 kg |
| EAN Tube              | 8714692239151 | Tread depth              | 18 mm  |

# TRACTOR TYRES FRONT

## 10.00 - 16 8 PR / 115 A8 TT FAKTOR-F

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692327377 | Section width            | 280 mm  |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 905 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 425 mm  |
| Recommended rim width | W8            | Load capacity at 30 km/h | 1345 kg |
| Permitted rim width   | W8L           | Load capacity at 40 km/h | 1215 kg |
| EAN Tube              | 8714692239175 | Tread depth              | 21 mm   |

## 11.00 - 16 10 PR / 122 A8 TT FAKTOR-F

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692335099 | Section width            | 330 mm  |
| Nominal tyre pressure | 3,1 bar       | Overall diameter         | 975 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 455 mm  |
| Recommended rim width | W10L          | Load capacity at 30 km/h | 1665 kg |
| Permitted rim width   | W8, W8L       | Load capacity at 40 km/h | 1500 kg |
| EAN Tube              | 8714692239182 | Tread depth              | 22 mm   |

## 7.50 - 18 8 PR / 106 A8 TT FAKTOR-F

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692327414 | Section width            | 205 mm  |
| Nominal tyre pressure | 3,7 bar       | Overall diameter         | 860 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 400 mm  |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 1050 kg |
| Permitted rim width   |               | Load capacity at 40 km/h | 950 kg  |
| EAN Tube              | 8714692239199 | Tread depth              | 18 mm   |

## 4.00 - 19 4 PR / 72 A8 TT FAKTOR-F

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692327438 | Section width            | 110 mm |
| Nominal tyre pressure | 3,4 bar       | Overall diameter         | 715 mm |
| Tyre construction     | Diagonaal     | Static loaded radius     | 335 mm |
| Recommended rim width | 3.00D         | Load capacity at 30 km/h | 390 kg |
| Permitted rim width   |               | Load capacity at 40 km/h | 355 kg |
|                       |               | Tread depth              | 10 mm  |

## 7.50 - 20 8 PR / 109 A8 TT FAKTOR-F

|                       |               |                          |         |
|-----------------------|---------------|--------------------------|---------|
| EAN                   | 8714692327452 | Section width            | 205 mm  |
| Nominal tyre pressure | 3,4 bar       | Overall diameter         | 915 mm  |
| Tyre construction     | Diagonaal     | Static loaded radius     | 425 mm  |
| Recommended rim width | 5.50F         | Load capacity at 30 km/h | 1140 kg |
| Permitted rim width   | 5.00F         | Load capacity at 40 km/h | 1030 kg |
| EAN Tube              | 8714692239177 | Tread depth              | 18 mm   |





# HARVESTER TYRES

## DRIVE WHEEL

Pag.

|                  |     |
|------------------|-----|
| Traxion Harvest  | 104 |
| Traxion Optimall | 114 |
| TraxionXXL       | 115 |

## STEERING WHEEL

|                         |     |
|-------------------------|-----|
| Traxion Harvest         | 116 |
| Traxion Versa           | 122 |
| TraxionXXL / Traxion 65 | 123 |



# HARVESTER TYRES DRIVE WHEEL —



## TRAXION HARVEST

PROVIDING HIGHEST PRODUCTIVITY  
WITH MODERN HARVESTING EQUIPMENT

### FEATURES

Unique curved cleats  
Strong yet flexible carcass  
CHO technology




### BENEFITS

High traction, stability & comfort  
High load capacity and durability  
Maximum soil preservation






# TRAXION HARVEST

| Ø               | Tyre size       | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|-----------------|-----------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 26              | 620/75 R 26     | 166 A8/B            | 3,2                              | DW20B   | 610  | 1585   | 710  | 4720   | 106  |
|                 | 650/75 R 32     | 172 A8/B            | 3,2                              | DW20B   | 630  | 1790   | 825  | 5350   | 106  |
|                 | 680/85 R 32     | 173 A8/B            | 2,4                              | DW21B   | 665  | 1950   | 875  | 5805   | 107  |
|                 | 680/85 R 32     | 179 A8/B            | 3,2                              | DW21B   | 670  | 1950   | 875  | 5805   | 107  |
|                 | 680/85 R 32 CHO | 179 A8/B            | 3,2                              | DW21B   | 670  | 1950   | 875  | 5805   | 108  |
|                 | 800/65 R 32     | 172 A8/B            | 2,4                              | DW27B   | 770  | 1830   | 835  | 5450   | 108  |
|                 | 800/65 R 32 CHO | 172 A8/B            | 2,4                              | DW27B   | 770  | 1830   | 835  | 5450   | 109  |
|                 | 800/65 R 32     | 178 A8/B            | 3,2                              | DW27B   | 760  | 1840   | 835  | 5500   | 109  |
|                 | 800/70 R 32     | 175 A8/B            | 2,4                              | DW27B   | 770  | 1925   | 870  | 5700   | 110  |
|                 | 800/70 R 32 CHO | 175 A8/B            | 2,4                              | DW27B   | 770  | 1925   | 870  | 5700   | 110  |
|                 | 800/70 R 32     | 181 A8/B            | 3,2                              | DW27B   | 780  | 1925   | 870  | 5700   | 111  |
|                 | 900/60 R 32     | 176 A8/B            | 2,4                              | DW27B   | 835  | 1885   | 850  | 5610   | 111  |
|                 | 900/60 R 32 CHO | 176 A8/B            | 2,4                              | DW27B   | 835  | 1885   | 850  | 5610   | 112  |
|                 | 900/60 R 32     | 181 A8/B            | 3,2                              | DW27B   | 835  | 1885   | 850  | 5610   | 112  |
|                 | 38              | 800/70 R 38         | 181 D                            | 2,8   | DW25B  | 755  | 2050   | 920  | 6080 |
| 800/70 R 38 CHO |                 | 181 D               | 2,8                              | DW25B   | 755  | 2050   | 920  | 6080   | 113  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

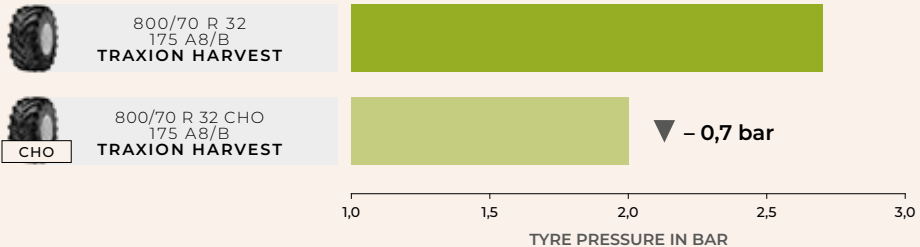

MAXIMUM CYCLIC TYRE LOAD OF 11,500 KG IN HARVESTING OPERATIONS

# HARVESTER TYRES DRIVE WHEEL

## 620/75 R 26 166 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |      |      |                        |      |         |      |  |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|------|--|
| EAN                   |     | 8714692311314              |      |      |      |      | Section width          |      | 610 mm  |      |  |
| Nominal tyre pressure |     | 3,2 bar                    |      |      |      |      | Overall diameter       |      | 1585 mm |      |  |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 710 mm  |      |  |
| Recommended rim width |     | DW20B                      |      |      |      |      | Rolling circumference  |      | 4720 mm |      |  |
| Permitted rim width   |     |                            |      |      |      |      | SRI                    |      | 750     |      |  |
| Alternative tyre size |     | 23.1 R 26                  |      |      |      |      | Tread depth            |      | 46 mm   |      |  |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 457 l   |      |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |  |
|                       |     | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |  |
| Speed (km/h)          | 10C | 4175                       | 4970 | 5775 | 6675 | 7195 | 7650                   | 8135 | 8720    | 9010 |  |
|                       | 10L | 3685                       | 4385 | 5095 | 5890 | 6350 | 6750                   | 7175 | 7695    | 7950 |  |
|                       | 10H | 2920                       | 3465 | 4145 | 4520 | 4815 | 5275                   | 5670 |         |      |  |
|                       | 25  | 3030                       | 3595 | 4300 | 4690 | 4995 | 5470                   | 5885 |         |      |  |
|                       | 30  | 2920                       | 3465 | 4145 | 4520 | 4815 | 5275                   | 5670 |         |      |  |
|                       | 40  |                            |      | 3875 | 4225 | 4500 | 4930                   | 5300 |         |      |  |
|                       | 50  |                            |      | 3875 | 4225 | 4500 | 4930                   | 5300 |         |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/75 R 32 172 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |      |      |                        |      |         |       |  |
|-----------------------|-----|----------------------------|------|------|------|------|------------------------|------|---------|-------|--|
| EAN                   |     | 8714692309632              |      |      |      |      | Section width          |      | 630 mm  |       |  |
| Nominal tyre pressure |     | 3,2 bar                    |      |      |      |      | Overall diameter       |      | 1790 mm |       |  |
| Tyre construction     |     | Radial                     |      |      |      |      | Static loaded radius   |      | 825 mm  |       |  |
| Recommended rim width |     | DW20B                      |      |      |      |      | Rolling circumference  |      | 5350 mm |       |  |
| Permitted rim width   |     | DW21B, DW23B               |      |      |      |      | SRI                    |      | 825     |       |  |
|                       |     |                            |      |      |      |      | Tread depth            |      | 56 mm   |       |  |
|                       |     |                            |      |      |      |      | 75% of the tyre volume |      | 566 l   |       |  |
|                       |     | Tyre pressure (bar)        |      |      |      |      |                        |      |         |       |  |
|                       |     | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |       |  |
| Speed (km/h)          | 10C | 4960                       | 5905 | 6860 | 7930 | 8550 | 9010                   | 9665 | 10360   | 10710 |  |
|                       | 10L | 4380                       | 5210 | 6050 | 7000 | 7545 | 7950                   | 8525 | 9140    | 9450  |  |
|                       | 10H | 3470                       | 4120 | 4950 | 5370 | 5670 | 6265                   | 6740 |         |       |  |
|                       | 25  | 3600                       | 4270 | 5135 | 5570 | 5885 | 6500                   | 6995 |         |       |  |
|                       | 30  | 3470                       | 4120 | 4950 | 5370 | 5670 | 6265                   | 6740 |         |       |  |
|                       | 40  |                            |      | 4625 | 5020 | 5300 | 5855                   | 6300 |         |       |  |
|                       | 50  |                            |      | 4625 | 5020 | 5300 | 5855                   | 6300 |         |       |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES — DRIVE WHEEL

## 680/85 R 32 173 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |      |                        |      |         |      |      |       |       |       |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|-------|-------|-------|
| EAN                   |     | 8714692335495              |      |      |      | Section width          |      | 665 mm  |      |      |       |       |       |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      | Overall diameter       |      | 1950 mm |      |      |       |       |       |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 875 mm  |      |      |       |       |       |
| Recommended rim width |     | DW21B                      |      |      |      | Rolling circumference  |      | 5805 mm |      |      |       |       |       |
| Permitted rim width   |     | DW20B, DW23B               |      |      |      | SRI                    |      | 925     |      |      |       |       |       |
|                       |     |                            |      |      |      | Tread depth            |      | 44 mm   |      |      |       |       |       |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 758 l   |      |      |       |       |       |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |       |       |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40  | 2,60  | 2,80  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |       |       |       |
| Speed (km/h)          | 10C | 5230                       | 5990 | 6750 | 7125 | 7700                   | 8280 | 8950    | 9575 | 9975 | 10325 | 10745 | 11050 |
|                       | 10L | 4615                       | 5285 | 5955 | 6290 | 6795                   | 7305 | 7900    | 8450 | 8805 | 9110  | 9480  | 9750  |
|                       | 10H | 3590                       | 4190 | 4545 | 4970 | 5450                   | 5830 | 6215    | 6485 | 6715 | 6955  |       |       |
|                       | 25  | 3725                       | 4345 | 4710 | 5160 | 5650                   | 6050 | 6450    | 6725 | 6965 | 7215  |       |       |
|                       | 30  | 3590                       | 4190 | 4545 | 4970 | 5450                   | 5830 | 6215    | 6485 | 6715 | 6955  |       |       |
|                       | 40  |                            |      | 4245 | 4645 | 5090                   | 5450 | 5810    | 6060 | 6275 | 6500  |       |       |
|                       | 50  |                            |      | 4245 | 4645 | 5090                   | 5450 | 5810    | 6060 | 6275 | 6500  |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 680/85 R 32 179 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |      |                        |       |         |       |       |  |  |  |
|-----------------------|-----|----------------------------|------|------|------|------------------------|-------|---------|-------|-------|--|--|--|
| EAN                   |     | 8714692344886              |      |      |      | Section width          |       | 670 mm  |       |       |  |  |  |
| Nominal tyre pressure |     | 3,2 bar                    |      |      |      | Overall diameter       |       | 1950 mm |       |       |  |  |  |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |       | 875 mm  |       |       |  |  |  |
| Recommended rim width |     | DW21B                      |      |      |      | Rolling circumference  |       | 5805 mm |       |       |  |  |  |
| Permitted rim width   |     | DW20B, DW23B               |      |      |      | SRI                    |       | 925     |       |       |  |  |  |
|                       |     |                            |      |      |      | Tread depth            |       | 44 mm   |       |       |  |  |  |
|                       |     |                            |      |      |      | 75% of the tyre volume |       | 755 l   |       |       |  |  |  |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |       |         |       |       |  |  |  |
|                       |     | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80  | 3,20    | 3,60  | 4,00  |  |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |       |         |       |       |  |  |  |
| Speed (km/h)          | 10C | 5990                       | 7125 | 8280 | 9575 | 10325                  | 11050 | 11665   | 12510 | 13175 |  |  |  |
|                       | 10L | 5285                       | 6290 | 7305 | 8450 | 9110                   | 9750  | 10295   | 11035 | 11625 |  |  |  |
|                       | 10H | 4190                       | 4970 | 5830 | 6485 | 6955                   | 7565  | 8295    |       |       |  |  |  |
|                       | 25  | 4345                       | 5160 | 6050 | 6725 | 7215                   | 7850  | 8605    |       |       |  |  |  |
|                       | 30  | 4190                       | 4970 | 5830 | 6485 | 6955                   | 7565  | 8295    |       |       |  |  |  |
|                       | 40  |                            | 4645 | 5450 | 6060 | 6500                   | 7070  | 7750    |       |       |  |  |  |
|                       | 50  |                            | 4645 | 5450 | 6060 | 6500                   | 7070  | 7750    |       |       |  |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES DRIVE WHEEL

## 680/85 R 32 CHO 179 A8/B TL TRAXION HARVEST

|                       |       |                            |      |      |       |                        |       |         |  |
|-----------------------|-------|----------------------------|------|------|-------|------------------------|-------|---------|--|
| EAN                   |       | 8714692344879              |      |      |       | Section width          |       | 670 mm  |  |
| Nominal tyre pressure |       | 3,2 bar                    |      |      |       | Overall diameter       |       | 1950 mm |  |
| Tyre construction     |       | Radial                     |      |      |       | Static loaded radius   |       | 875 mm  |  |
| Recommended rim width |       | DW21B                      |      |      |       | Rolling circumference  |       | 5805 mm |  |
| Permitted rim width   |       | DW20B, DW23B               |      |      |       | SRI                    |       | 925     |  |
|                       |       |                            |      |      |       | Tread depth            |       | 44 mm   |  |
|                       |       |                            |      |      |       | 75% of the tyre volume |       | 755 l   |  |
|                       |       | Tyre pressure (bar)        |      |      |       |                        |       |         |  |
|                       |       | 0,80                       | 1,20 | 1,60 | 2,00  | 2,40                   | 2,80  | 3,20    |  |
|                       |       | Load capacity per tyre(kg) |      |      |       |                        |       |         |  |
| Speed (km/h)          | 10CHO | 6345                       | 7545 | 8770 | 10140 | 10930                  | 11700 | 12355   |  |
|                       | 15CHO | 5815                       | 6915 | 8035 | 9295  | 10020                  | 10725 | 11325   |  |
|                       | 25    | 4345                       | 5160 | 6050 | 6725  | 7215                   | 7850  | 8605    |  |
|                       | 30    | 4190                       | 4970 | 5830 | 6485  | 6955                   | 7565  | 8295    |  |
|                       | 40    |                            | 4645 | 5450 | 6060  | 6500                   | 7070  | 7750    |  |
|                       | 50    |                            | 4645 | 5450 | 6060  | 6500                   | 7070  | 7750    |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/65 R 32 172 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |      |                        |      |         |      |      |      |       |       |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|-------|-------|
| EAN                   |     | 8714692309656              |      |      |      | Section width          |      | 770 mm  |      |      |      |       |       |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      | Overall diameter       |      | 1830 mm |      |      |      |       |       |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 835 mm  |      |      |      |       |       |
| Recommended rim width |     | DW27B                      |      |      |      | Rolling circumference  |      | 5450 mm |      |      |      |       |       |
| Permitted rim width   |     | DW25B                      |      |      |      | SRI                    |      | 875     |      |      |      |       |       |
|                       |     |                            |      |      |      | Tread depth            |      | 56 mm   |      |      |      |       |       |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 747 l   |      |      |      |       |       |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |       |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00 | 2,20 | 2,40 | 2,60  | 2,80  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |       |       |
| Speed (km/h)          | 10C | 5145                       | 5895 | 6570 | 7000 | 7550                   | 8065 | 8600    | 9135 | 9530 | 9970 | 10410 | 10710 |
|                       | 10L | 4540                       | 5200 | 5800 | 6270 | 6890                   | 7370 | 7775    | 8255 | 8405 | 8795 | 9185  | 9450  |
|                       | 10H | 3530                       | 4120 | 4530 | 4995 | 5395                   | 5830 | 5950    | 6245 | 6505 | 6740 |       |       |
|                       | 25  | 3665                       | 4275 | 4700 | 5185 | 5595                   | 6050 | 6170    | 6475 | 6750 | 6995 |       |       |
|                       | 30  | 3530                       | 4120 | 4530 | 4995 | 5395                   | 5830 | 5950    | 6245 | 6505 | 6740 |       |       |
|                       | 40  |                            |      | 4235 | 4670 | 5040                   | 5450 | 5560    | 5835 | 6080 | 6300 |       |       |
|                       | 50  |                            |      | 4235 | 4670 | 5040                   | 5450 | 5560    | 5835 | 6080 | 6300 |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES — DRIVE WHEEL

## 800/65 R 32 CHO 172 A8/B TL TRAXION HARVEST

|                       |       |                            |      |      |      |                        |       |         |       |       |
|-----------------------|-------|----------------------------|------|------|------|------------------------|-------|---------|-------|-------|
| EAN                   |       | 8714692324192              |      |      |      | Section width          |       | 770 mm  |       |       |
| Nominal tyre pressure |       | 2,4 bar                    |      |      |      | Overall diameter       |       | 1830 mm |       |       |
| Tyre construction     |       | Radial                     |      |      |      | Static loaded radius   |       | 835 mm  |       |       |
| Recommended rim width |       | DW27B                      |      |      |      | Rolling circumference  |       | 5450 mm |       |       |
| Permitted rim width   |       | DW25B                      |      |      |      | SRI                    |       | 875     |       |       |
|                       |       |                            |      |      |      | Tread depth            |       | 56 mm   |       |       |
|                       |       |                            |      |      |      | 75% of the tyre volume |       | 737 l   |       |       |
|                       |       | Tyre pressure (bar)        |      |      |      |                        |       |         |       |       |
|                       |       | 0,80                       | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80  | 2,00    | 2,20  | 2,40  |
|                       |       | Load capacity per tyre(kg) |      |      |      |                        |       |         |       |       |
| Speed (km/h)          | 10CHO | 6935                       | 7505 | 8210 | 8860 | 9540                   | 10010 | 10505   | 10945 | 11340 |
|                       | 15CHO | 6355                       | 6880 | 7525 | 8125 | 8745                   | 9175  | 9630    | 10035 | 10395 |
|                       | 25    | 4275                       | 4700 | 5185 | 5595 | 6050                   | 6170  | 6475    | 6750  | 6995  |
|                       | 30    | 4120                       | 4530 | 4995 | 5395 | 5830                   | 5950  | 6245    | 6505  | 6740  |
|                       | 40    |                            | 4235 | 4670 | 5040 | 5450                   | 5560  | 5835    | 6080  | 6300  |
|                       | 50    |                            | 4235 | 4670 | 5040 | 5450                   | 5560  | 5835    | 6080  | 6300  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/65 R 32 178 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |      |                        |       |         |       |       |  |
|-----------------------|-----|----------------------------|------|------|------|------------------------|-------|---------|-------|-------|--|
| EAN                   |     | 8714692336652              |      |      |      | Section width          |       | 760 mm  |       |       |  |
| Nominal tyre pressure |     | 3,2 bar                    |      |      |      | Overall diameter       |       | 1840 mm |       |       |  |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |       | 835 mm  |       |       |  |
| Recommended rim width |     | DW27B                      |      |      |      | Rolling circumference  |       | 5500 mm |       |       |  |
| Permitted rim width   |     | DW25B                      |      |      |      | SRI                    |       | 875     |       |       |  |
|                       |     |                            |      |      |      | Tread depth            |       | 56 mm   |       |       |  |
|                       |     |                            |      |      |      | 75% of the tyre volume |       | 737 l   |       |       |  |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |       |         |       |       |  |
|                       |     | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80  | 3,20    | 3,60  | 4,00  |  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |       |         |       |       |  |
| Speed (km/h)          | 10C | 5895                       | 7000 | 8065 | 9135 | 9970                   | 10710 | 11370   | 12185 | 12750 |  |
|                       | 10L | 5200                       | 6270 | 7370 | 8255 | 8795                   | 9450  | 10035   | 10750 | 11250 |  |
|                       | 10H | 4120                       | 4995 | 5830 | 6245 | 6740                   | 7375  | 8025    |       |       |  |
|                       | 25  | 4275                       | 5185 | 6050 | 6475 | 6995                   | 7650  | 8325    |       |       |  |
|                       | 30  | 4120                       | 4995 | 5830 | 6245 | 6740                   | 7375  | 8025    |       |       |  |
|                       | 40  |                            | 4670 | 5450 | 5835 | 6300                   | 6890  | 7500    |       |       |  |
|                       |     |                            |      | 4670 | 5450 | 5835                   | 6300  | 6890    | 7500  |       |  |
|                       | 50  |                            | 4670 | 5450 | 5835 | 6300                   | 6890  | 7500    |       |       |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES DRIVE WHEEL

## 800/70 R 32 175 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |      |                        |      |         |       |       |       |       |       |
|-----------------------|-----|----------------------------|------|------|------|------------------------|------|---------|-------|-------|-------|-------|-------|
| EAN                   |     | 8714692309670              |      |      |      | Section width          |      | 770 mm  |       |       |       |       |       |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |      | Overall diameter       |      | 1925 mm |       |       |       |       |       |
| Tyre construction     |     | Radial                     |      |      |      | Static loaded radius   |      | 870 mm  |       |       |       |       |       |
| Recommended rim width |     | DW27B                      |      |      |      | Rolling circumference  |      | 5700 mm |       |       |       |       |       |
| Permitted rim width   |     | DW30B                      |      |      |      | SRI                    |      | 925     |       |       |       |       |       |
|                       |     |                            |      |      |      | Tread depth            |      | 56 mm   |       |       |       |       |       |
|                       |     |                            |      |      |      | 75% of the tyre volume |      | 844 l   |       |       |       |       |       |
|                       |     | Tyre pressure (bar)        |      |      |      |                        |      |         |       |       |       |       |       |
|                       |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40                   | 1,60 | 1,80    | 2,00  | 2,20  | 2,40  | 2,60  | 2,80  |
|                       |     | Load capacity per tyre(kg) |      |      |      |                        |      |         |       |       |       |       |       |
| Speed (km/h)          | 10C | 5660                       | 6480 | 7305 | 7710 | 8330                   | 8960 | 9685    | 10360 | 10790 | 11170 | 11620 | 11730 |
|                       | 10L | 4990                       | 5720 | 6445 | 6805 | 7350                   | 7905 | 8545    | 9140  | 9520  | 9855  | 10255 | 10350 |
|                       | 10H | 3885                       | 4530 | 4915 | 5380 | 5895                   | 6420 | 6725    | 7015  | 7265  | 7385  |       |       |
|                       | 25  | 4030                       | 4700 | 5100 | 5580 | 6115                   | 6660 | 6975    | 7275  | 7535  | 7660  |       |       |
|                       | 30  | 3885                       | 4530 | 4915 | 5380 | 5895                   | 6420 | 6725    | 7015  | 7265  | 7385  |       |       |
|                       | 40  |                            |      | 4595 | 5025 | 5510                   | 6000 | 6285    | 6555  | 6790  | 6900  |       |       |
| 50                    |     |                            | 4595 | 5025 | 5510 | 6000                   | 6285 | 6555    | 6790  | 6900  |       |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/70 R 32 CHO 175 A8/B TL TRAXION HARVEST

|                       |       |                            |      |      |      |                        |       |         |       |       |  |  |  |
|-----------------------|-------|----------------------------|------|------|------|------------------------|-------|---------|-------|-------|--|--|--|
| EAN                   |       | 8714692324215              |      |      |      | Section width          |       | 770 mm  |       |       |  |  |  |
| Nominal tyre pressure |       | 2,4 bar                    |      |      |      | Overall diameter       |       | 1925 mm |       |       |  |  |  |
| Tyre construction     |       | Radial                     |      |      |      | Static loaded radius   |       | 870 mm  |       |       |  |  |  |
| Recommended rim width |       | DW27B                      |      |      |      | Rolling circumference  |       | 5700 mm |       |       |  |  |  |
| Permitted rim width   |       | DW30B                      |      |      |      | SRI                    |       | 925     |       |       |  |  |  |
|                       |       |                            |      |      |      | Tread depth            |       | 56 mm   |       |       |  |  |  |
|                       |       |                            |      |      |      | 75% of the tyre volume |       | 844 l   |       |       |  |  |  |
|                       |       | Tyre pressure (bar)        |      |      |      |                        |       |         |       |       |  |  |  |
|                       |       | 0,80                       | 1,00 | 1,20 | 1,40 | 1,60                   | 1,80  | 2,00    | 2,20  | 2,40  |  |  |  |
|                       |       | Load capacity per tyre(kg) |      |      |      |                        |       |         |       |       |  |  |  |
| Speed (km/h)          | 10CHO | 7625                       | 8265 | 9050 | 9915 | 10800                  | 11310 | 11800   | 12220 | 12420 |  |  |  |
|                       | 15CHO | 6990                       | 7580 | 8295 | 9090 | 9900                   | 10370 | 10815   | 11200 | 11385 |  |  |  |
|                       | 25    | 4700                       | 5100 | 5580 | 6115 | 6660                   | 6975  | 7275    | 7535  | 7660  |  |  |  |
|                       | 30    | 4530                       | 4915 | 5380 | 5895 | 6420                   | 6725  | 7015    | 7265  | 7385  |  |  |  |
|                       | 40    |                            | 4595 | 5025 | 5510 | 6000                   | 6285  | 6555    | 6790  | 6900  |  |  |  |
|                       | 50    |                            | 4595 | 5025 | 5510 | 6000                   | 6285  | 6555    | 6790  | 6900  |  |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES — DRIVE WHEEL

## 800/70 R 32 181 A8/B TL TRAXION HARVEST

|                       |               |                        |         |
|-----------------------|---------------|------------------------|---------|
| EAN                   | 8714692309694 | Section width          | 780 mm  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter       | 1925 mm |
| Tyre construction     | Radial        | Static loaded radius   | 870 mm  |
| Recommended rim width | DW27B         | Rolling circumference  | 5700 mm |
| Permitted rim width   | DW30B         | SRI                    | 925     |
|                       |               | Tread depth            | 56 mm   |
|                       |               | 75% of the tyre volume | 856 l   |

|              |     | Tyre pressure (bar)        |      |      |       |       |       |       |       |       |
|--------------|-----|----------------------------|------|------|-------|-------|-------|-------|-------|-------|
|              |     | 0,80                       | 1,20 | 1,60 | 2,00  | 2,40  | 2,80  | 3,20  | 3,60  | 4,00  |
|              |     | Load capacity per tyre(kg) |      |      |       |       |       |       |       |       |
| Speed (km/h) | 10C | 6480                       | 7710 | 8960 | 10360 | 11170 | 11730 | 12620 | 13530 | 14025 |
|              | 10L | 5720                       | 6805 | 7905 | 9140  | 9855  | 10350 | 11135 | 11940 | 12375 |
|              | 10H | 4530                       | 5380 | 6420 | 7015  | 7385  | 8185  | 8830  |       |       |
|              | 25  | 4700                       | 5580 | 6660 | 7275  | 7660  | 8490  | 9160  |       |       |
|              | 30  | 4530                       | 5380 | 6420 | 7015  | 7385  | 8185  | 8830  |       |       |
|              | 40  |                            |      | 6000 | 6555  | 6900  | 7650  | 8250  |       |       |
| 50           |     |                            | 6000 | 6555 | 6900  | 7650  | 8250  |       |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 900/60 R 32 176 A8/B TL TRAXION HARVEST

|                       |               |                        |         |
|-----------------------|---------------|------------------------|---------|
| EAN                   | 8714692309717 | Section width          | 835 mm  |
| Nominal tyre pressure | 2,4 bar       | Overall diameter       | 1885 mm |
| Tyre construction     | Radial        | Static loaded radius   | 850 mm  |
| Recommended rim width | DW27B         | Rolling circumference  | 5610 mm |
| Permitted rim width   | DW28B, DW30B  | SRI                    | 925     |
|                       |               | Tread depth            | 56 mm   |
|                       |               | 75% of the tyre volume | 873 l   |

|              |     | Tyre pressure (bar)        |      |      |      |      |      |      |       |       |       |       |       |
|--------------|-----|----------------------------|------|------|------|------|------|------|-------|-------|-------|-------|-------|
|              |     | 0,60                       | 0,80 | 1,00 | 1,20 | 1,40 | 1,60 | 1,80 | 2,00  | 2,20  | 2,40  | 2,60  | 2,80  |
|              |     | Load capacity per tyre(kg) |      |      |      |      |      |      |       |       |       |       |       |
| Speed (km/h) | 10C | 5765                       | 6600 | 7360 | 7845 | 8460 | 9040 | 9635 | 10235 | 10675 | 11170 | 11665 | 12070 |
|              | 10L | 5085                       | 5825 | 6495 | 6920 | 7465 | 7975 | 8500 | 9030  | 9420  | 9855  | 10290 | 10650 |
|              | 10H | 3955                       | 4615 | 5000 | 5465 | 5900 | 6205 | 6665 | 6995  | 7290  | 7595  |       |       |
|              | 25  | 4105                       | 4790 | 5185 | 5670 | 6120 | 6440 | 6915 | 7255  | 7560  | 7880  |       |       |
|              | 30  | 3955                       | 4615 | 5000 | 5465 | 5900 | 6205 | 6665 | 6995  | 7290  | 7595  |       |       |
|              | 40  |                            |      | 4670 | 5110 | 5515 | 5800 | 6230 | 6535  | 6815  | 7100  |       |       |
|              | 50  |                            |      | 4670 | 5110 | 5515 | 5800 | 6230 | 6535  | 6815  | 7100  |       |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES DRIVE WHEEL

## 900/60 R 32 CHO 176 A8/B TL TRAXION HARVEST

|                       |       |                            |      |      |      |       |                        |       |         |       |  |
|-----------------------|-------|----------------------------|------|------|------|-------|------------------------|-------|---------|-------|--|
| EAN                   |       | 8714692327629              |      |      |      |       | Section width          |       | 835 mm  |       |  |
| Nominal tyre pressure |       | 2,4 bar                    |      |      |      |       | Overall diameter       |       | 1885 mm |       |  |
| Tyre construction     |       | Radial                     |      |      |      |       | Static loaded radius   |       | 850 mm  |       |  |
| Recommended rim width |       | DW27B                      |      |      |      |       | Rolling circumference  |       | 5610 mm |       |  |
| Permitted rim width   |       | DW28B, DW30B               |      |      |      |       | SRI                    |       | 925     |       |  |
|                       |       |                            |      |      |      |       | Tread depth            |       | 56 mm   |       |  |
|                       |       |                            |      |      |      |       | 75% of the tyre volume |       | 925 l   |       |  |
|                       |       | Tyre pressure (bar)        |      |      |      |       |                        |       |         |       |  |
|                       |       | 0,80                       | 1,00 | 1,20 | 1,40 | 1,60  | 1,80                   | 2,00  | 2,20    | 2,40  |  |
|                       |       | Load capacity per tyre(kg) |      |      |      |       |                        |       |         |       |  |
| Speed (km/h)          | 10CHO | 7765                       | 8410 | 9195 | 9925 | 10440 | 11210                  | 11765 | 12265   | 12780 |  |
|                       | 15CHO | 7120                       | 7710 | 8430 | 9100 | 9570  | 10280                  | 10785 | 11240   | 11715 |  |
|                       | 25    | 4790                       | 5185 | 5670 | 6120 | 6440  | 6915                   | 7255  | 7560    | 7880  |  |
|                       | 30    | 4615                       | 5000 | 5465 | 5900 | 6205  | 6665                   | 6995  | 7290    | 7595  |  |
|                       | 40    |                            | 4670 | 5110 | 5515 | 5800  | 6230                   | 6535  | 6815    | 7100  |  |
|                       | 50    |                            | 4670 | 5110 | 5515 | 5800  | 6230                   | 6535  | 6815    | 7100  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 900/60 R 32 181 A8/B TL TRAXION HARVEST

|                       |     |                            |      |      |       |       |                        |       |         |       |  |
|-----------------------|-----|----------------------------|------|------|-------|-------|------------------------|-------|---------|-------|--|
| EAN                   |     | 8714692309731              |      |      |       |       | Section width          |       | 835 mm  |       |  |
| Nominal tyre pressure |     | 2,4 bar                    |      |      |       |       | Overall diameter       |       | 1885 mm |       |  |
| Tyre construction     |     | Radial                     |      |      |       |       | Static loaded radius   |       | 850 mm  |       |  |
| Recommended rim width |     | DW27B                      |      |      |       |       | Rolling circumference  |       | 5610 mm |       |  |
| Permitted rim width   |     | DW28B, DW30B               |      |      |       |       | SRI                    |       | 925     |       |  |
|                       |     |                            |      |      |       |       | Tread depth            |       | 56 mm   |       |  |
|                       |     |                            |      |      |       |       | 75% of the tyre volume |       | 870 l   |       |  |
|                       |     | Tyre pressure (bar)        |      |      |       |       |                        |       |         |       |  |
|                       |     | 0,80                       | 1,20 | 1,60 | 2,00  | 2,40  | 2,80                   | 3,20  | 3,60    | 4,00  |  |
|                       |     | Load capacity per tyre(kg) |      |      |       |       |                        |       |         |       |  |
| Speed (km/h)          | 10C | 6600                       | 7845 | 9040 | 10235 | 11170 | 12070                  | 12740 | 13650   | 14025 |  |
|                       | 10L | 5825                       | 6920 | 7975 | 9030  | 9855  | 10650                  | 11240 | 12045   | 12375 |  |
|                       | 10H | 4615                       | 5465 | 6205 | 6995  | 7595  | 8260                   | 8830  |         |       |  |
|                       | 25  | 4790                       | 5670 | 6440 | 7255  | 7880  | 8570                   | 9160  |         |       |  |
|                       | 30  | 4615                       | 5465 | 6205 | 6995  | 7595  | 8260                   | 8830  |         |       |  |
|                       | 40  |                            | 5110 | 5800 | 6535  | 7100  | 7720                   | 8250  |         |       |  |
|                       | 50  |                            | 5110 | 5800 | 6535  | 7100  | 7720                   | 8250  |         |       |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# HARVESTER TYRES — DRIVE WHEEL

## 800/70 R 38 181 D TL TRAXION HARVEST

|                       |     |                            |      |      |       |                        |       |         |       |  |  |
|-----------------------|-----|----------------------------|------|------|-------|------------------------|-------|---------|-------|--|--|
| EAN                   |     | 8714692344923              |      |      |       | Section width          |       | 755 mm  |       |  |  |
| Nominal tyre pressure |     | 2,8 bar                    |      |      |       | Overall diameter       |       | 2050 mm |       |  |  |
| Tyre construction     |     | Radial                     |      |      |       | Static loaded radius   |       | 920 mm  |       |  |  |
| Recommended rim width |     | DW25B                      |      |      |       | Rolling circumference  |       | 6080 mm |       |  |  |
| Permitted rim width   |     | DW27B                      |      |      |       | SRI                    |       | 975     |       |  |  |
|                       |     |                            |      |      |       | Tread depth            |       | 57 mm   |       |  |  |
|                       |     |                            |      |      |       | 75% of the tyre volume |       | 887 l   |       |  |  |
|                       |     | Tyre pressure (bar)        |      |      |       |                        |       |         |       |  |  |
|                       |     | 0,80                       | 1,20 | 1,60 | 2,00  | 2,40                   | 2,80  | 3,20    | 3,40  |  |  |
|                       |     | Load capacity per tyre(kg) |      |      |       |                        |       |         |       |  |  |
| Speed (km/h)          | 10C | 6950                       | 8270 | 9610 | 11110 | 11980                  | 12565 | 13745   | 14025 |  |  |
|                       | 10L | 6135                       | 7295 | 8480 | 9805  | 10570                  | 11640 | 12125   | 12375 |  |  |
|                       | 10H | 5225                       | 6200 | 7475 | 8085  | 8625                   | 9490  |         |       |  |  |
|                       | 25  | 5385                       | 6390 | 7705 | 8335  | 8890                   | 9775  |         |       |  |  |
|                       | 30  | 5225                       | 6200 | 7475 | 8085  | 8625                   | 9490  |         |       |  |  |
|                       | 40  | 4975                       | 5905 | 7120 | 7700  | 8215                   | 9035  |         |       |  |  |
|                       | 50  | 4770                       | 5660 | 6825 | 7385  | 7875                   | 8665  |         |       |  |  |
|                       | 65  |                            | 5390 | 6500 | 7030  | 7500                   | 8250  |         |       |  |  |
|                       | 70  |                            | 4905 | 5915 | 6400  | 6825                   | 7510  |         |       |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/70 R 38 CHO 181 D TL TRAXION HARVEST

|                       |        |                            |      |      |       |                        |       |         |       |       |       |       |
|-----------------------|--------|----------------------------|------|------|-------|------------------------|-------|---------|-------|-------|-------|-------|
| EAN                   |        | 8714692344916              |      |      |       | Section width          |       | 755 mm  |       |       |       |       |
| Nominal tyre pressure |        | 2,8 bar                    |      |      |       | Overall diameter       |       | 2050 mm |       |       |       |       |
| Tyre construction     |        | Radial                     |      |      |       | Static loaded radius   |       | 920 mm  |       |       |       |       |
| Recommended rim width |        | DW25B                      |      |      |       | Rolling circumference  |       | 6080 mm |       |       |       |       |
| Permitted rim width   |        | DW27B                      |      |      |       | SRI                    |       | 975     |       |       |       |       |
|                       |        |                            |      |      |       | Tread depth            |       | 57 mm   |       |       |       |       |
|                       |        |                            |      |      |       | 75% of the tyre volume |       | 887 l   |       |       |       |       |
|                       |        | Tyre pressure (bar)        |      |      |       |                        |       |         |       |       |       |       |
|                       |        | 0,80                       | 1,00 | 1,20 | 1,40  | 1,60                   | 1,80  | 2,00    | 2,20  | 2,40  | 2,60  | 2,80  |
|                       |        | Load capacity per tyre(kg) |      |      |       |                        |       |         |       |       |       |       |
| Speed (km/h)          | 10 CHO | 8180                       | 8870 | 9705 | 10635 | 11700                  | 12135 | 12655   | 13105 | 13500 | 14550 | 14850 |
|                       | 15 CHO | 7495                       | 8130 | 8900 | 9750  | 10725                  | 11120 | 11605   | 12015 | 12375 | 13340 | 13615 |
|                       | 25     | 5385                       | 5840 | 6390 | 7000  | 7705                   | 7990  | 8335    | 8630  | 8890  | 9580  | 9775  |
|                       | 30     | 5225                       | 5665 | 6200 | 6795  | 7475                   | 7750  | 8085    | 8375  | 8625  | 9295  | 9490  |
|                       | 40     | 4975                       | 5395 | 5905 | 6470  | 7120                   | 7380  | 7700    | 7975  | 8215  | 8855  | 9035  |
|                       | 50     | 4770                       | 5175 | 5660 | 6205  | 6825                   | 7080  | 7385    | 7645  | 7875  | 8490  | 8665  |
|                       | 65     |                            | 4925 | 5390 | 5910  | 6500                   | 6740  | 7030    | 7280  | 7500  | 8085  | 8250  |
|                       | 70     |                            | 4485 | 4905 | 5375  | 5915                   | 6135  | 6400    | 6625  | 6825  | 7355  | 7510  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES DRIVE WHEEL —



## TRAXION OPTIMAL

### THE NEXT GENERATION VF TYRE

#### FEATURES

Innovative carcass construction enabling up to 25% lower inflation pressure in the field

Traxion concept with unique tread compound and high rubber content for 30% better wear resistance

10% higher radial stiffness\*\*

#### BENEFITS

7%\* higher productivity and 7%\* lower fuel consumption  
15%\*\* larger footprint for less soil compaction and higher yield






30% longer life\*\*\*

Maximum stability at heavy road transport

\* According to tests conducted by DLG, compared to premium European IF competitor tyre.

\*\* According to measurements by Vredestein testing dept, compared to premium European VF competitor tyre.

\*\*\* According to Vredestein R&D compared to premium European IF and VF competitor tyres.

| Ø  | Tyre size              | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|------------------------|---------------------|----------------------------------|--|---|---|---|---|------|
| 38 | VF 650/85 R 38 PFO     | 182 D               | 2,0                              | DW23B  | 670*  | 2060*   | 900*  | 6105*   | 21   |
|    | VF 800/70 R 38 PFO     | 187 D               | 2,0                              | DW27B  | 805   | 2060  | 900   | 6100  | 22   |
| 42 | VF 650/85 R 42 PFO     | 183 D               | 2,0                              | DW23B  | 670*  | 2160*   | 950*  | 6395*   | 23   |
|    | VF 710/70 R 42 PFO     | 182 D               | 2,0                              | DW25B  | 730   | 2060  | 910   | 6110  | 24   |
|    | VF 710/75 R 42 PFO     | 184 D               | 2,0                              | DW25B  | 730   | 2160  | 965   | 6390  | 25   |
|    | VF 800/70 R 42 PFO     | 189 D               | 2,0                              | DW27B  | 800   | 2165  | 930   | 6380  | 25   |
|    | VF 900/60 R 42 PFO NRO | 189 D               | 2,0                              | DW30B  | 875   | 2145  | 920   | 6315  | 26   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

#### PFO (Pressure Field Operation)

Vredestein Very high Flexion (VF) tractor tyres with the marking Pressure Field Operation (PFO) are in conformity with a new Experimental Standard registered by the European Tyre and Rim Technical Organisation (ETRTO) in 2019. PFO tyres - marked with PFO as a suffix after the size designation - are allowed to be operated at lower inflation pressures at lower speeds (especially in the field) compared to standard VF tyres.

# HARVESTER TYRES — DRIVE WHEEL



## TRAXION<sup>XXL</sup>

OFFERING HIGHEST EFFICIENCY AND  
LONGEST LIFE FOR HIGH HP TRACTORS

### FEATURES

Unique curved cleats and compound properties

Dedicated traction and comfort zone

Largest volume

### BENEFITS

Extended lifespan

Maximized traction and excellent comfort

High load capacity



| Ø  | Tyre size   | Service description | Nominal inflation pressure (bar) |       |     |      |     |      | Pag. |
|----|-------------|---------------------|----------------------------------|-------|-----|------|-----|------|------|
| 38 | 710/70 R 38 | 166 D               | 1,6                              | DW23B | 730 | 1930 | 870 | 5760 | 35   |
|    | 710/75 R 38 | 174 D               | 2,4                              | DW23B | 715 | 2000 | 910 | 5950 | 36   |
|    | 800/70 R 38 | 178 D               | 2,4                              | DW25B | 825 | 2065 | 940 | 6160 | 36   |
|    | 900/60 R 38 | 178 D               | 2,4                              | DW27B | 870 | 2040 | 925 | 6100 | 37   |
| 42 | 710/70 R 42 | 173 D               | 2,4                              | DW23B | 730 | 2060 | 940 | 6140 | 37   |
|    | 710/75 R 42 | 175 D               | 2,4                              | DW23B | 735 | 2150 | 980 | 6395 | 38   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES STEERING WHEEL -



## TRAXION HARVEST

PROVIDING HIGHEST PRODUCTIVITY  
WITH MODERN HARVESTING EQUIPMENT

### FEATURES






- Unique curved cleats
- Strong yet flexible carcass
- IMP technology

### BENEFITS

- High traction, stability & comfort
- High load capacity and durability
- Maximum soil preservation












# TRAXION HARVEST

| Ø  | Tyre size       | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-----------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 24 | 460/70 R 24 IMP | 163 A8              | 3,2                              | W15L  | 455  | 1235   | 555  | 3745   | 117  |
|    | 500/70 R 24 IMP | 164 A8              | 2,8                              | W15L  | 480  | 1305   | 580  | 3925   | 118  |
|    | 500/85 R 24 IMP | 171 A8              | 2,8                              | W15L  | 505  | 1450   | 645  | 4360   | 118  |
| 28 | 500/80 R 28 IMP | 176 A8              | 3,2                              | W15L  | 490  | 1490   | 665  | 4520   | 119  |
|    | 600/65 R 28 IMP | 168 A8              | 2,0                              | DW18L   | 580  | 1470   | 650  | 4300   | 119  |
| 30 | 500/85 R 30 IMP | 176 A8              | 2,8                              | W16L  | 505  | 1600   | 715  | 4750   | 120  |
|    | 620/70 R 30 IMP | 178 A8              | 2,8                              | DW20B   | 590  | 1600   | 715  | 4760   | 120  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



## 460/70 R 24 IMP 163 A8 / 151 A8 TL TRAXION HARVEST

|  |  |                            |      |      |                        |         |      |      |  |
|--|--|----------------------------|------|------|------------------------|---------|------|------|--|
| EAN  | 8714692335426  |                            |      |      | Section width          | 455 mm  |      |      |  |
| Nominal tyre pressure  | 3,2 bar  |                            |      |      | Overall diameter       | 1235 mm |      |      |  |
| Tyre construction  | Radial   |                            |      |      | Static loaded radius   | 555 mm  |      |      |  |
| Recommended rim width  | W15L   |                            |      |      | Rolling circumference  | 3745 mm |      |      |  |
| Permitted rim width  | W14L, W16L   |                            |      |      | SRI                    | 600     |      |      |  |
| <b>Very important: When these are fitted on a steered axle, see***</b> |  |                            |      |      | Tread depth            | 34 mm   |      |      |  |
|  |  |                            |      |      | 75% of the tyre volume | 169 l   |      |      |  |
|  |  | Tyre pressure (bar)        |      |      |                        |         |      |      |  |
|  |  | 0,80                       | 1,20 | 1,60 | 2,00                   | 2,40    | 2,80 | 3,20 |  |
|  |  | Load capacity per tyre(kg) |      |      |                        |         |      |      |  |
| Speed (km/h)   | 10  | 2805                       | 3610 | 4410 | 5110                   | 5600    | 6125 | 6825 |  |
|  | 10  | 1965                       | 2525 | 3050 | 3605                   | 3920    | 4305 | 4830 |  |
|  | 25  | 2385                       | 3070 | 3750 | 4345                   | 4760    | 5205 | 5800 |  |
|  | 25  | 1670                       | 2145 | 2595 | 3065                   | 3330    | 3660 | 4105 |  |
|  | 30  | 2245                       | 2885 | 3530 | 4090                   | 4480    | 4900 | 5460 |  |
|  | 30  | 1570                       | 2020 | 2440 | 2885                   | 3135    | 3445 | 3865 |  |
|  | 40  | 2005                       | 2580 | 3150 | 3650                   | 4000    | 4375 | 4875 |  |
|  | 40  | 1405                       | 1805 | 2180 | 2575                   | 2800    | 3075 | 3450 |  |
|  | 50  | 1805                       | 2320 | 2835 | 3285                   | 3600    | 3940 | 4390 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES STEERING WHEEL -

## 500/70 R 24 IMP 164 A8 / 155 A8 TL TRAXION HARVEST

|  |      |                            |      |      |                        |      |         |
|--|------|----------------------------|------|------|------------------------|------|---------|
| EAN  |      | 8714692335433              |      |      | Section width          |      | 480 mm  |
| Nominal tyre pressure  |      | 2,8 bar                    |      |      | Overall diameter       |      | 1305 mm |
| Tyre construction  |      | Radial                     |      |      | Static loaded radius   |      | 580 mm  |
| Recommended rim width  |      | W15L                       |      |      | Rolling circumference  |      | 3925 mm |
| Permitted rim width  |      | W16L                       |      |      | SRI                    |      | 625     |
| <b>Very important: When these are fitted on a steered axle, see***</b> |      |                            |      |      | Tread depth            |      | 37 mm   |
|  |      |                            |      |      | 75% of the tyre volume |      | 211 l   |
|  |      | Tyre pressure (bar)        |      |      |                        |      |         |
|  |      | 0,80                       | 1,20 | 1,60 | 2,00                   | 2,40 | 2,80    |
|  |      | Load capacity per tyre(kg) |      |      |                        |      |         |
| Speed (km/h)   | 10 Ⓢ | 3200                       | 4115 | 4970 | 5775                   | 6475 | 7000    |
|  | 10 Ⓞ | 2480                       | 3190 | 3920 | 4550                   | 4970 | 5425    |
|  | 25 Ⓢ | 2720                       | 3495 | 4225 | 4910                   | 5505 | 5950    |
|  | 25 Ⓞ | 2110                       | 2710 | 3330 | 3870                   | 4225 | 4610    |
|  | 30 Ⓢ | 2560                       | 3290 | 3975 | 4620                   | 5180 | 5600    |
|  | 30 Ⓞ | 1985                       | 2550 | 3135 | 3640                   | 3975 | 4340    |
|  | 40 Ⓢ | 2285                       | 2940 | 3550 | 4125                   | 4625 | 5000    |
|  | 40 Ⓞ | 1770                       | 2275 | 2800 | 3250                   | 3550 | 3875    |
|  | 50 Ⓢ | 2055                       | 2645 | 3195 | 3715                   | 4165 | 4500    |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 500/85 R 24 IMP 171 A8 / 158 A8 TL TRAXION HARVEST

|  |      |                            |      |      |                        |      |         |
|--|------|----------------------------|------|------|------------------------|------|---------|
| EAN  |      | 8714692335440              |      |      | Section width          |      | 505 mm  |
| Nominal tyre pressure  |      | 2,8 bar                    |      |      | Overall diameter       |      | 1450 mm |
| Tyre construction  |      | Radial                     |      |      | Static loaded radius   |      | 645 mm  |
| Recommended rim width  |      | W15L                       |      |      | Rolling circumference  |      | 4360 mm |
| Permitted rim width  |      | W16L                       |      |      | SRI                    |      | 700     |
| <b>Very important: When these are fitted on a steered axle, see***</b> |      |                            |      |      | Tread depth            |      | 37 mm   |
|  |      |                            |      |      | 75% of the tyre volume |      | 302 l   |
|  |      | Tyre pressure (bar)        |      |      |                        |      |         |
|  |      | 0,80                       | 1,20 | 1,60 | 2,00                   | 2,40 | 2,80    |
|  |      | Load capacity per tyre(kg) |      |      |                        |      |         |
| Speed (km/h)   | 10 Ⓢ | 3830                       | 4925 | 5950 | 6650                   | 7630 | 8610    |
|  | 10 Ⓞ | 2680                       | 3445 | 4200 | 4690                   | 5250 | 5950    |
|  | 25 Ⓢ | 3255                       | 4185 | 5060 | 5655                   | 6485 | 7320    |
|  | 25 Ⓞ | 2280                       | 2930 | 3570 | 3985                   | 4465 | 5060    |
|  | 30 Ⓢ | 3065                       | 3940 | 4760 | 5320                   | 6105 | 6890    |
|  | 30 Ⓞ | 2145                       | 2755 | 3360 | 3750                   | 4200 | 4760    |
|  | 40 Ⓢ | 2735                       | 3515 | 4250 | 4750                   | 5450 | 6150    |
|  | 40 Ⓞ | 1915                       | 2460 | 3000 | 3350                   | 3750 | 4250    |
|  | 50 Ⓢ | 2460                       | 3165 | 3825 | 4275                   | 4905 | 5535    |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES -STEERING WHEEL

## 500/80 R 28 IMP 176 A8 / 164 A8 TL TRAXION HARVEST

|  |               |                        |         |
|--|---------------|------------------------|---------|
| EAN  | 8714692335457 | Section width          | 490 mm  |
| Nominal tyre pressure  | 3,2 bar       | Overall diameter       | 1490 mm |
| Tyre construction  | Radial        | Static loaded radius   | 665 mm  |
| Recommended rim width  | W15L          | Rolling circumference  | 4520 mm |
| Permitted rim width  | W16L          | SRI                    | 725     |
| <b>Very important: When these are fitted on a steered axle, see***</b> |               | Tread depth            | 37 mm   |
|  |               | 75% of the tyre volume | 283 l   |

|              |      | Tyre pressure (bar)        |      |      |      |      |      |      |
|--------------|------|----------------------------|------|------|------|------|------|------|
|              |      | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 |
|              |      | Load capacity per tyre(kg) |      |      |      |      |      |      |
| Speed (km/h) | 10 Ⓢ | 3855                       | 4960 | 6125 | 7000 | 8120 | 9100 | 9940 |
|              | 10 Ⓞ | 2740                       | 3520 | 4305 | 4970 | 5775 | 6475 | 7000 |
|              | 25 Ⓢ | 3280                       | 4215 | 5205 | 5950 | 6900 | 7735 | 8450 |
|              | 25 Ⓞ | 2330                       | 2995 | 3660 | 4225 | 4910 | 5505 | 5950 |
|              | 30 Ⓢ | 3085                       | 3965 | 4900 | 5600 | 6495 | 7280 | 7950 |
|              | 30 Ⓞ | 2190                       | 2815 | 3445 | 3975 | 4620 | 5180 | 5600 |
|              | 40 Ⓢ | 2755                       | 3540 | 4375 | 5000 | 5800 | 6500 | 7100 |
|              | 40 Ⓞ | 1955                       | 2515 | 3075 | 3550 | 4125 | 4625 | 5000 |
|              | 50 Ⓢ | 2480                       | 3190 | 3940 | 4500 | 5220 | 5850 | 6390 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 600/65 R 28 IMP 168 A8 / 156 A8 TL TRAXION HARVEST

|  |               |                        |         |
|--|---------------|------------------------|---------|
| EAN  | 8714692335471 | Section width          | 580 mm  |
| Nominal tyre pressure  | 2,0 bar       | Overall diameter       | 1470 mm |
| Tyre construction  | Radial        | Static loaded radius   | 650 mm  |
| Recommended rim width  | DW18L         | Rolling circumference  | 4300 mm |
| Permitted rim width  | DW16L,W18L    | SRI                    | 700     |
| <b>Very important: When these are fitted on a steered axle, see***</b> |               | Tread depth            | 52 mm   |
|  |               | 75% of the tyre volume | 315 l   |

|              |      | Tyre pressure (bar)        |      |      |      |
|--------------|------|----------------------------|------|------|------|
|              |      | 0,80                       | 1,20 | 1,60 | 2,00 |
|              |      | Load capacity per tyre(kg) |      |      |      |
| Speed (km/h) | 10 Ⓢ | 4255                       | 5475 | 6650 | 7840 |
|              | 10 Ⓞ | 3085                       | 3970 | 4830 | 5600 |
|              | 25 Ⓢ | 3620                       | 4650 | 5655 | 6665 |
|              | 25 Ⓞ | 2625                       | 3375 | 4105 | 4760 |
|              | 30 Ⓢ | 3405                       | 4380 | 5320 | 6270 |
|              | 30 Ⓞ | 2470                       | 3175 | 3865 | 4480 |
|              | 40 Ⓢ | 3040                       | 3910 | 4750 | 5600 |
|              | 40 Ⓞ | 2205                       | 2835 | 3450 | 4000 |
|              | 50 Ⓢ | 2735                       | 3520 | 4275 | 5040 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES STEERING WHEEL -

## 500/85 R 30 IMP 176 A8 / 164 A8 TL TRAXION HARVEST

|  |               |                            |         |      |      |      |      |
|--|---------------|----------------------------|---------|------|------|------|------|
| EAN  | 8714692335464 | Section width              | 505 mm  |      |      |      |      |
| Nominal tyre pressure  | 2,8 bar       | Overall diameter           | 1600 mm |      |      |      |      |
| Tyre construction  | Radial        | Static loaded radius       | 715 mm  |      |      |      |      |
| Recommended rim width  | W16L          | Rolling circumference      | 4750 mm |      |      |      |      |
| Permitted rim width  | W15L          | SRI                        | 775     |      |      |      |      |
| <b>Very important: When these are fitted on a steered axle, see***</b> |               | Tread depth                | 37 mm   |      |      |      |      |
|  |               | 75% of the tyre volume     | 344 l   |      |      |      |      |
|  |               | Tyre pressure (bar)        |         |      |      |      |      |
|  |               | 0,80                       | 1,20    |      |      |      |      |
|  |               | 1,60                       | 2,00    |      |      |      |      |
|  |               | 2,40                       | 2,80    |      |      |      |      |
|  |               | Load capacity per tyre(kg) |         |      |      |      |      |
| Speed (km/h)   | 10 Ⓢ          | 4195                       | 5395    | 6650 | 7630 | 8820 | 9940 |
|  | 10 Ⓢ          | 2940                       | 3775    | 4550 | 5425 | 6125 | 7000 |
|  | 25 Ⓢ          | 3565                       | 4585    | 5655 | 6485 | 7495 | 8450 |
|  | 25 Ⓢ          | 2495                       | 3210    | 3870 | 4610 | 5205 | 5950 |
|  | 30 Ⓢ          | 3355                       | 4315    | 5320 | 6105 | 7055 | 7950 |
|  | 30 Ⓢ          | 2350                       | 3020    | 3640 | 4340 | 4900 | 5600 |
|  | 40 Ⓢ          | 3000                       | 3855    | 4750 | 5450 | 6300 | 7100 |
|  | 40 Ⓢ          | 2100                       | 2700    | 3250 | 3875 | 4375 | 5000 |
|  | 50 Ⓢ          | 2700                       | 3470    | 4275 | 4905 | 5670 | 6390 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 620/70 R 30 IMP 178 A8 / 166 A8 TL TRAXION HARVEST

|  |               |                            |         |      |      |       |
|--|---------------|----------------------------|---------|------|------|-------|
| EAN  | 8714692335488 | Section width              | 590 mm  |      |      |       |
| Nominal tyre pressure  | 2,4 bar       | Overall diameter           | 1600 mm |      |      |       |
| Tyre construction  | Radial        | Static loaded radius       | 715 mm  |      |      |       |
| Recommended rim width  | DW20L         | Rolling circumference      | 4760 mm |      |      |       |
| Permitted rim width  | DW18L         | SRI                        | 775     |      |      |       |
| <b>Very important: When these are fitted on a steered axle, see***</b> |               | Tread depth                | 52 mm   |      |      |       |
|  |               | 75% of the tyre volume     | 392 l   |      |      |       |
|  |               | Tyre pressure (bar)        |         |      |      |       |
|  |               | 0,80                       | 1,20    |      |      |       |
|  |               | 1,60                       | 2,00    |      |      |       |
|  |               | 2,40                       |         |      |      |       |
|  |               | Load capacity per tyre(kg) |         |      |      |       |
| Speed (km/h)   | 10 Ⓢ          | 4935                       | 6345    | 7840 | 9100 | 10500 |
|  | 10 Ⓢ          | 3505                       | 4505    | 5425 | 6300 | 7420  |
|  | 25 Ⓢ          | 4195                       | 5395    | 6665 | 7735 | 8925  |
|  | 25 Ⓢ          | 2980                       | 3830    | 4610 | 5355 | 6305  |
|  | 30 Ⓢ          | 3950                       | 5080    | 6270 | 7280 | 8400  |
|  | 30 Ⓢ          | 2805                       | 3605    | 4340 | 5040 | 5935  |
|  | 40 Ⓢ          | 3525                       | 4535    | 5600 | 6500 | 7500  |
|  | 40 Ⓢ          | 2505                       | 3220    | 3875 | 4500 | 5300  |
|  | 50 Ⓢ          | 3175                       | 4080    | 5040 | 5850 | 6750  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# HARVESTER TYRES -STEERING WHEEL



# HARVESTER TYRES STEERING WHEEL -



## TRAXION<sup>VERSA</sup>

UNBEATABLE ON  
SOFT SURFACES

### FEATURES

- Large cleat surface in comfort zone
- Extended curved cleats in traction zone
- Reinforced sidewall & stabiliser ring

### BENEFITS

- Flat and large contact surface
- Maximum traction
- Maximum damage protection

| Ø  | Tyre size       | Service description | Nominal inflation pressure (bar) |       |     |      |     |      | Pag. |
|----|-----------------|---------------------|----------------------------------|-------|-----|------|-----|------|------|
|    |                 |                     |                                  |       | mm  | mm   | mm  | mm   |      |
| 18 | 340/80 R 18 IND | 143 A8/B            | 4,0                              | 11    | 355 | 1000 | 455 | 3000 | 130  |
| 20 | 400/70 R 20 IND | 149 A8/B            | 4,0                              | 13    | 405 | 1075 | 475 | 3250 | 130  |
| 24 | 400/70 R 24 IND | 152 A8/B            | 4,0                              | 13    | 405 | 1170 | 535 | 3510 | 131  |
|    | 400/80 R 24 IND | 162 A8/B            | 5,0                              | DW13  | 405 | 1240 | 570 | 3740 | 131  |
|    | 460/70 R 24 IND | 159 A8/B            | 4,0                              | DW15L | 480 | 1255 | 570 | 3800 | 132  |
|    | 500/70 R 24 IND | 164 A8/B            | 4,0                              | DW16L | 515 | 1320 | 595 | 4020 | 132  |
| 26 | 480/80 R 26 IND | 160 A8/B            | 3,2                              | DW15L | 495 | 1440 | 645 | 4320 | 133  |
| 28 | 440/80 R 28 IND | 156 A8/B            | 4,0                              | DW14L | 450 | 1415 | 640 | 4270 | 133  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# HARVESTER TYRES -STEERING WHEEL



## TRAXION<sup>XXL</sup>

OFFERING HIGHEST EFFICIENCY AND  
LONGEST LIFE FOR HIGH HP TRACTORS

### FEATURES

Unique curved cleats and compound properties

Dedicated traction and comfort zone

Largest volume






### BENEFITS

Extended lifespan

Maximized traction and excellent comfort

High load capacity



| Ø  | Tyre size                | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|--------------------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 28 | 600/65 R 28              | 154 D               | 2,4                              | DW18L   | 595  | 1480   | 670  | 4405   | 31   |
|    | 600/70 R 28              | 157 D               | 2,4                              | DW20B   | 610  | 1540   | 700  | 4590   | 31   |
| 30 | 540/65 R 30 <sup>1</sup> | 150 D               | 2,4                              | DW16L   | 540  | 1460   | 670  | 4400   | 47   |
|    | 600/70 R 30              | 158 D               | 2,4                              | DW20B   | 630  | 1590   | 725  | 4750   | 32   |
|    | 710/60 R 30              | 162 D               | 2,4                              | DW23B   | 705  | 1610   | 730  | 4800   | 32   |

For the explanation of the symbols and abbreviations, see the inside of the last page.

1 = Traxion 65





# AGRI INDUSTRIAL TYRES

## SOFT SURFACE

PAG.

Traxion Versa Green  
Traxion Versa

126  
128

## HARD SURFACE

Endurion

134



# AGRI INDUSTRIAL TYRES FOR SOFT SURFACES —



## **TRAXION** *VERSA GREEN*

THE PREMIUM SOLUTION  
FOR ALPINE APPLICATIONS

### FEATURES

Traxion concept with unique tread compound and high rubber content in the centre

Steel belt combined with stabilizer ring

Curved Tread Contour with rounded lug shoulders

### BENEFITS






Excellent driving comfort & 30% longer tyre life  
Maximum traction

Excellent side grip for stable driving behaviour on slopes

Grassland preservation



# TRAXION VERSA GREEN

| Ø  | Tyre size       | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-----------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 17 | 440/50 R 17 IMP | 135 D               | 3,6                              | 14  | 435  | 875  | 405  | 2660   | 127  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 440/50 R 17 IMP 135 D TL TRAXION VERSA GREEN

|                       |                            |      |                                 |         |      |      |      |      |      |
|-----------------------|----------------------------|------|---------------------------------|---------|------|------|------|------|------|
| EAN                   | 8714692892943              |      | Section width                   | 435 mm  |      |      |      |      |      |
| Nominal tyre pressure | 3,6 bar                    |      | Overall diameter                | 875 mm  |      |      |      |      |      |
| Tyre construction     | Radial                     |      | Static loaded radius            | 405 mm  |      |      |      |      |      |
| Recommended rim width | 14                         |      | Rolling circumference           | 2660 mm |      |      |      |      |      |
| Permitted rim width   | 13.00                      |      | SRI                             | 410     |      |      |      |      |      |
| Alternative tyre size | 425/55 R 17                |      | Tread depth (including tie bar) | 27 mm   |      |      |      |      |      |
|                       |                            |      | Tie bar height                  | 3 mm    |      |      |      |      |      |
|                       |                            |      | 75% of the tyre volume          | 104 l   |      |      |      |      |      |
|                       |                            |      | Tyre pressure (bar)             |         |      |      |      |      |      |
|                       | 0,80                       | 1,20 | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 |      |
|                       | Load capacity per tyre(kg) |      |                                 |         |      |      |      |      |      |
| Speed (km/h)          | 10                         | 1370 | 1765                            | 2155    | 2500 | 2865 | 3225 | 3510 | 3925 |
|                       | 25                         | 1205 | 1545                            | 1890    | 2195 | 2515 | 2830 | 3080 | 3445 |
|                       | 30                         | 1150 | 1480                            | 1805    | 2095 | 2405 | 2705 | 2945 | 3290 |
|                       | 40                         | 1035 | 1330                            | 1630    | 1890 | 2165 | 2435 | 2650 | 2965 |
|                       | 50                         | 920  | 1185                            | 1450    | 1680 | 1925 | 2170 | 2360 | 2640 |
|                       | 65                         |      | 980                             | 1195    | 1390 | 1590 | 1790 | 1950 | 2180 |
|                       | 70                         |      | 890                             | 1090    | 1265 | 1450 | 1630 | 1775 | 1985 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# AGRI INDUSTRIAL TYRES FOR SOFT SURFACES



## **TRAXION** *VERSA*

**UNBEATABLE ON  
SOFT SURFACES**

### **FEATURES**

- Large cleat surface in comfort zone
- Extended curved cleats in traction zone
- Reinforced sidewall & stabiliser ring






### **BENEFITS**

- Flat and large contact surface
- Maximum traction
- Maximum damage protection





# TRAXION VERSA

| Ø  | Tyre size       | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-----------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 18 | 340/80 R 18 IND | 143 A8/B            | 4,0                              | 11  | 355  | 1000   | 455  | 3000   | 130  |
| 20 | 400/70 R 20 IND | 149 A8/B            | 4,0                              | 13  | 405  | 1075   | 475  | 3250   | 130  |
| 24 | 400/70 R 24 IND | 152 A8/B            | 4,0                              | 13  | 405  | 1170   | 535  | 3510   | 131  |
|    | 400/80 R 24 IND | 162 A8/B            | 5,0                              | DW13  | 405  | 1240   | 570  | 3740   | 131  |
|    | 460/70 R 24 IND | 159 A8/B            | 4,0                              | DW15L   | 480  | 1255   | 570  | 3800   | 132  |
|    | 500/70 R 24 IND | 164 A8/B            | 4,0                              | DW16L   | 515  | 1320   | 595  | 4020   | 132  |
| 26 | 480/80 R 26 IND | 160 A8/B            | 3,2                              | DW15L   | 495  | 1440   | 645  | 4320   | 133  |
| 28 | 440/80 R 28 IND | 156 A8/B            | 3,2                              | DW14L   | 450  | 1415   | 640  | 4270   | 133  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# AGRI INDUSTRIAL TYRES FOR SOFT SURFACES

## 340/80 R 18 IND 143 A8/B TL TRAXION VERSA

|                       |                 |                                 |         |      |      |      |      |      |      |
|-----------------------|-----------------|---------------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692335341   | Section width                   | 355 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar         | Overall diameter                | 1000 mm |      |      |      |      |      |      |
| Tyre construction     | Radial          | Static loaded radius            | 455 mm  |      |      |      |      |      |      |
| Recommended rim width | 11              | Rolling circumference           | 3000 mm |      |      |      |      |      |      |
| Permitted rim width   | W10, W11,       | SRI                             | 475     |      |      |      |      |      |      |
| Alternative tyre size | 11SDC, 12, 12SC | Tread depth (including tie bar) | 32 mm   |      |      |      |      |      |      |
|                       | 335/80 R 18     | Tie bar height                  | 3 mm    |      |      |      |      |      |      |
|                       | 12.5 R 18       | 75% of the tyre volume          | 86 l    |      |      |      |      |      |      |
|                       |                 | Tyre pressure (bar)             |         |      |      |      |      |      |      |
|                       |                 | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |
|                       |                 | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |
| Speed (km/h)          | 0               | 2430                            | 2970    | 3505 | 4045 | 4585 | 5150 | 5665 | 6265 |
|                       | 10Ci            | 1585                            | 1935    | 2285 | 2640 | 2990 | 3360 | 3695 | 4090 |
|                       | 25              | 1370                            | 1615    | 1865 | 2115 | 2375 | 2610 | 2890 |      |
|                       | 30              | 1340                            | 1585    | 1830 | 2075 | 2330 | 2560 | 2835 |      |
|                       | 40              | 1290                            | 1525    | 1760 | 1995 | 2240 | 2465 | 2725 |      |
|                       | 50              | 1290                            | 1525    | 1760 | 1995 | 2240 | 2465 | 2725 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 400/70 R 20 IND 149 A8/B TL TRAXION VERSA

|                       |                  |                                 |         |      |      |      |      |      |      |
|-----------------------|------------------|---------------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692309922    | Section width                   | 405 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar          | Overall diameter                | 1075 mm |      |      |      |      |      |      |
| Tyre construction     | Radial           | Static loaded radius            | 475 mm  |      |      |      |      |      |      |
| Recommended rim width | 13               | Rolling circumference           | 3250 mm |      |      |      |      |      |      |
| Permitted rim width   | 12SDC, 13SDC, 14 | SRI                             | 525     |      |      |      |      |      |      |
| Alternative tyre size | 405/70 R 20      | Tread depth (including tie bar) | 36 mm   |      |      |      |      |      |      |
|                       | 16.0/70 R 20     | Tie bar height                  | 3 mm    |      |      |      |      |      |      |
|                       |                  | 75% of the tyre volume          | 115 l   |      |      |      |      |      |      |
|                       |                  | Tyre pressure (bar)             |         |      |      |      |      |      |      |
|                       |                  | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |
|                       |                  | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |
| Speed (km/h)          | 0                | 2915                            | 3590    | 4260 | 4860 | 5530 | 6205 | 6840 | 7475 |
|                       | 10Ci             | 1900                            | 2340    | 2780 | 3170 | 3610 | 4045 | 4460 | 4875 |
|                       | 25               | 1640                            | 1955    | 2245 | 2640 | 2970 | 3150 | 3445 |      |
|                       | 30               | 1610                            | 1920    | 2205 | 2590 | 2910 | 3095 | 3380 |      |
|                       | 40               | 1550                            | 1845    | 2120 | 2490 | 2800 | 2975 | 3250 |      |
|                       | 50               | 1550                            | 1845    | 2120 | 2490 | 2800 | 2975 | 3250 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# AGRI INDUSTRIAL TYRES — FOR SOFT SURFACES

## 400/70 R 24 IND 152 A8/B TL TRAXION VERSA

|                       |                  |                                 |         |      |      |      |      |      |      |  |
|-----------------------|------------------|---------------------------------|---------|------|------|------|------|------|------|--|
| EAN                   | 8714692335358    | Section width                   | 405 mm  |      |      |      |      |      |      |  |
| Nominal tyre pressure | 4,0 bar          | Overall diameter                | 1170 mm |      |      |      |      |      |      |  |
| Tyre construction     | Radial           | Static loaded radius            | 535 mm  |      |      |      |      |      |      |  |
| Recommended rim width | 13               | Rolling circumference           | 3510 mm |      |      |      |      |      |      |  |
| Permitted rim width   | 12SDC, 13SDC, 14 | SRI                             | 575     |      |      |      |      |      |      |  |
| Alternative tyre size | 405/70 R 24      | Tread depth (including tie bar) | 35 mm   |      |      |      |      |      |      |  |
|                       | 16.0/70 R 24     | Tie bar height                  | 3 mm    |      |      |      |      |      |      |  |
|                       |                  | 75% of the tyre volume          | 124 l   |      |      |      |      |      |      |  |
|                       |                  | Tyre pressure (bar)             |         |      |      |      |      |      |      |  |
|                       |                  | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |  |
|                       |                  | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |  |
| Speed (km/h)          | 0                | 3150                            | 3850    | 4550 | 5250 | 5950 | 6670 | 7350 | 8165 |  |
|                       | 10Ci             | 2055                            | 2510    | 2965 | 3425 | 3880 | 4350 | 4795 | 5325 |  |
|                       | 25               | 1775                            | 2095    | 2420 | 2740 | 3075 | 3385 | 3765 |      |  |
|                       | 30               | 1740                            | 2055    | 2375 | 2690 | 3015 | 3325 | 3690 |      |  |
|                       | 40               | 1675                            | 1980    | 2285 | 2585 | 2900 | 3195 | 3550 |      |  |
|                       | 50               | 1675                            | 1980    | 2285 | 2585 | 2900 | 3195 | 3550 |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 400/80 R 24 IND 162 A8/B TL TRAXION VERSA

|                       |               |                                 |         |      |      |      |      |      |      |       |
|-----------------------|---------------|---------------------------------|---------|------|------|------|------|------|------|-------|
| EAN                   | 8714692335365 | Section width                   | 405 mm  |      |      |      |      |      |      |       |
| Nominal tyre pressure | 5,0 bar       | Overall diameter                | 1240 mm |      |      |      |      |      |      |       |
| Tyre construction     | Radial        | Static loaded radius            | 570 mm  |      |      |      |      |      |      |       |
| Recommended rim width | DW13          | Rolling circumference           | 3740 mm |      |      |      |      |      |      |       |
| Permitted rim width   | 13            | SRI                             | 600     |      |      |      |      |      |      |       |
| Alternative tyre size | 15.5/80 R 24  | Tread depth (including tie bar) | 39 mm   |      |      |      |      |      |      |       |
|                       |               | Tie bar height                  | 3 mm    |      |      |      |      |      |      |       |
|                       |               | 75% of the tyre volume          | 151 l   |      |      |      |      |      |      |       |
|                       |               | Tyre pressure (bar)             |         |      |      |      |      |      |      |       |
|                       |               | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 | 5,00  |
|                       |               | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |       |
| Speed (km/h)          | 0             | 3545                            | 4335    | 5120 | 5910 | 6695 | 7475 | 8275 | 9200 | 10240 |
|                       | 10Ci          | 2310                            | 2825    | 3340 | 3855 | 4365 | 4875 | 5395 | 6000 | 6680  |
|                       | 25            | 1995                            | 2360    | 2725 | 3085 | 3445 | 3815 | 4240 | 4540 | 5035  |
|                       | 30            | 1960                            | 2315    | 2670 | 3030 | 3380 | 3740 | 4160 | 4455 | 4940  |
|                       | 40            | 1885                            | 2225    | 2570 | 2910 | 3250 | 3595 | 4000 | 4280 | 4750  |
|                       | 50            | 1885                            | 2225    | 2570 | 2910 | 3250 | 3595 | 4000 | 4280 | 4750  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# AGRI INDUSTRIAL TYRES FOR SOFT SURFACES

## 460/70 R 24 IND 159 A8/B TL TRAXION VERSA

|                       |               |                                 |         |      |      |      |      |      |       |
|-----------------------|---------------|---------------------------------|---------|------|------|------|------|------|-------|
| EAN                   | 8714692309946 | Section width                   | 480 mm  |      |      |      |      |      |       |
| Nominal tyre pressure | 4,0 bar       | Overall diameter                | 1255 mm |      |      |      |      |      |       |
| Tyre construction     | Radial        | Static loaded radius            | 570 mm  |      |      |      |      |      |       |
| Recommended rim width | DW15L         | Rolling circumference           | 3800 mm |      |      |      |      |      |       |
| Permitted rim width   | DW14L, DW16L  | SRI                             | 600     |      |      |      |      |      |       |
| Alternative tyre size | 17.5 LR 24    | Tread depth (including tie bar) | 38 mm   |      |      |      |      |      |       |
| EAN Tube              | 8714692332685 | Tie bar height                  | 3 mm    |      |      |      |      |      |       |
|                       |               | 75% of the tyre volume          | 191 l   |      |      |      |      |      |       |
|                       |               | Tyre pressure (bar)             |         |      |      |      |      |      |       |
|                       |               | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40  |
|                       |               | Load capacity per tyre(kg)      |         |      |      |      |      |      |       |
| Speed (km/h)          | 0             | 3915                            | 4785    | 5655 | 6520 | 7390 | 8165 | 9130 | 10065 |
|                       | 10Ci          | 2550                            | 3120    | 3685 | 4255 | 4820 | 5325 | 5955 | 6565  |
|                       | 25            | 2205                            | 2605    | 3005 | 3405 | 3765 | 4210 | 4640 |       |
|                       | 30            | 2165                            | 2555    | 2950 | 3340 | 3690 | 4130 | 4550 |       |
|                       | 40            | 2080                            | 2460    | 2835 | 3215 | 3550 | 3970 | 4375 |       |
|                       | 50            | 2080                            | 2460    | 2835 | 3215 | 3550 | 3970 | 4375 |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 500/70 R 24 IND 164 A8/B TL TRAXION VERSA

|                       |               |                                 |         |      |      |      |      |       |       |
|-----------------------|---------------|---------------------------------|---------|------|------|------|------|-------|-------|
| EAN                   | 8714692309960 | Section width                   | 515 mm  |      |      |      |      |       |       |
| Nominal tyre pressure | 4,0 bar       | Overall diameter                | 1320 mm |      |      |      |      |       |       |
| Tyre construction     | Radial        | Static loaded radius            | 595 mm  |      |      |      |      |       |       |
| Recommended rim width | DW16L         | Rolling circumference           | 4020 mm |      |      |      |      |       |       |
| Permitted rim width   | DW15L, DW18L  | SRI                             | 625     |      |      |      |      |       |       |
| Alternative tyre size | 19.5 LR 24    | Tread depth (including tie bar) | 39 mm   |      |      |      |      |       |       |
| EAN Tube              | 8714692332692 | Tie bar height                  | 3 mm    |      |      |      |      |       |       |
|                       |               | 75% of the tyre volume          | 234 l   |      |      |      |      |       |       |
|                       |               | Tyre pressure (bar)             |         |      |      |      |      |       |       |
|                       |               | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00  | 4,40  |
|                       |               | Load capacity per tyre(kg)      |         |      |      |      |      |       |       |
| Speed (km/h)          | 0             | 4460                            | 5450    | 6445 | 7435 | 8425 | 9490 | 10410 | 11500 |
|                       | 10Ci          | 2910                            | 3555    | 4200 | 4850 | 5495 | 6190 | 6790  | 7500  |
|                       | 25            | 2515                            | 2970    | 3425 | 3885 | 4375 | 4795 | 5300  |       |
|                       | 30            | 2465                            | 2915    | 3360 | 3810 | 4290 | 4705 | 5200  |       |
|                       | 40            | 2370                            | 2800    | 3230 | 3665 | 4125 | 4525 | 5000  |       |
|                       | 50            | 2370                            | 2800    | 3230 | 3665 | 4125 | 4525 | 5000  |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# AGRI INDUSTRIAL TYRES — FOR SOFT SURFACES

## 480/80 R 26 IND 160 A8/B TL TRAXION VERSA

|                       |               |                                 |         |
|-----------------------|---------------|---------------------------------|---------|
| EAN                   | 8714692309984 | Section width                   | 495 mm  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter                | 1440 mm |
| Tyre construction     | Radial        | Static loaded radius            | 645 mm  |
| Recommended rim width | DW15L         | Rolling circumference           | 4320 mm |
| Permitted rim width   | DW16L         | SRI                             | 675     |
| Alternative tyre size | 18.4 R 26     | Tread depth (including tie bar) | 39 mm   |
|                       |               | Tie bar height                  | 3 mm    |
|                       |               | 75% of the tyre volume          | 273 l   |

|              |      | Tyre pressure (bar)        |      |      |      |      |       |
|--------------|------|----------------------------|------|------|------|------|-------|
|              |      | 1,60                       | 2,00 | 2,40 | 2,80 | 3,20 | 3,60  |
|              |      | Load capacity per tyre(kg) |      |      |      |      |       |
| Speed (km/h) | 0    | 4885                       | 5970 | 7055 | 8145 | 9230 | 10350 |
|              | 10Ci | 3185                       | 3895 | 4605 | 5310 | 6020 | 6750  |
|              | 25   | 2750                       | 3255 | 3755 | 4255 | 4770 |       |
|              | 30   | 2700                       | 3190 | 3680 | 4175 | 4680 |       |
|              | 40   | 2595                       | 3070 | 3540 | 4015 | 4500 |       |
|              | 50   | 2595                       | 3070 | 3540 | 4015 | 4500 |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 440/80 R 28 IND 156 A8/B TL TRAXION VERSA

|                       |               |                                 |         |
|-----------------------|---------------|---------------------------------|---------|
| EAN                   | 8714692336416 | Section width                   | 450 mm  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter                | 1415 mm |
| Tyre construction     | Radial        | Static loaded radius            | 640 mm  |
| Recommended rim width | DW14L         | Rolling circumference           | 4270 mm |
| Permitted rim width   | DW15L         | SRI                             | 675     |
| Alternative tyre size | 16.9 R 28     | Tread depth (including tie bar) | 39 mm   |
|                       |               | Tie bar height                  | 3 mm    |
|                       |               | 75% of the tyre volume          | 219 l   |

|              |      | Tyre pressure (bar)        |      |      |      |      |      |
|--------------|------|----------------------------|------|------|------|------|------|
|              |      | 1,60                       | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 |
|              |      | Load capacity per tyre(kg) |      |      |      |      |      |
| Speed (km/h) | 0    | 4405                       | 5380 | 6360 | 7340 | 8315 | 9200 |
|              | 10Ci | 2870                       | 3510 | 4150 | 4785 | 5425 | 6000 |
|              | 25   | 2480                       | 2930 | 3380 | 3835 | 4240 |      |
|              | 30   | 2435                       | 2875 | 3320 | 3760 | 4160 |      |
|              | 40   | 2340                       | 2765 | 3190 | 3615 | 4000 |      |
|              | 50   | 2340                       | 2765 | 3190 | 3615 | 4000 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# AGRI INDUSTRIAL TYRES FOR HARD SURFACES —



## ***ENDURION***

THE EFFICIENCY CHAMPION  
ON HARD SURFACES






### **FEATURES**

- High rubber content in profile (44%)
- Broad-based 45-degree cleats
- Sophisticated compound and robust carcass design

### **BENEFITS**

- Exceptionally long service life
- Optimal self-cleaning and traction
- High durability, maximum return on investment



| Ø  | Tyre size       | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|----|-----------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 18 | 340/80 R 18 IND | 143 A8/B            | 4,0                              | 11  | 355  | 1000   | 460  | 3000   | 136  |
|    | 400/70 R 18 IND | 147 A8/B            | 4,0                              | 13  | 410  | 1015   | 465  | 3050   | 136  |
| 20 | 340/80 R 20 IND | 144 A8/B            | 4,0                              | 11  | 355  | 1055   | 490  | 3180   | 137  |
|    | 400/70 R 20 IND | 149 A8/B            | 4,0                              | 13  | 405  | 1070   | 490  | 3245   | 137  |
| 24 | 400/70 R 24 IND | 152 A8/B            | 4,0                              | 13  | 405  | 1170   | 540  | 3510   | 138  |
|    | 400/80 R 24 IND | 162 A8/B            | 5,0                              | DW13  | 410  | 1245   | 570  | 3720   | 138  |
|    | 460/70 R 24 IND | 159 A8/B            | 4,0                              | DW15L   | 480  | 1265   | 570  | 3820   | 139  |
|    | 500/70 R 24 IND | 164 A8/B            | 4,0                              | DW16L   | 520  | 1315   | 595  | 4000   | 139  |
| 26 | 480/80 R 26 IND | 160 A8/B            | 3,2                              | DW15L   | 495  | 1440   | 645  | 4320   | 140  |
| 28 | 440/80 R 28 IND | 156 A8/B            | 3,2                              | DW14L   | 455  | 1420   | 640  | 4290   | 140  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# AGRI INDUSTRIAL TYRES FOR HARD SURFACES

## 340/80 R 18 IND 143 A8/B TL ENDURION

|                       |                 |                                 |         |      |      |      |      |      |      |
|-----------------------|-----------------|---------------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692335372   | Section width                   | 355 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar         | Overall diameter                | 1000 mm |      |      |      |      |      |      |
| Tyre construction     | Radial          | Static loaded radius            | 460 mm  |      |      |      |      |      |      |
| Recommended rim width | 11              | Rolling circumference           | 3000 mm |      |      |      |      |      |      |
| Permitted rim width   | W10, W11,       | SRI                             | 475     |      |      |      |      |      |      |
| Alternative tyre size | 11SDC, 12, 12SC | Tread depth (including tie bar) | 26 mm   |      |      |      |      |      |      |
|                       | 335/80 R 18     | Tie bar height                  | 3 mm    |      |      |      |      |      |      |
|                       | 12.5 R 18       | 75% of the tyre volume          | 89 l    |      |      |      |      |      |      |
|                       |                 | Tyre pressure (bar)             |         |      |      |      |      |      |      |
|                       |                 | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |
|                       |                 | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |
| Speed (km/h)          | 0               | 2430                            | 2970    | 3505 | 4045 | 4585 | 5150 | 5665 | 6265 |
|                       | 10Ci            | 1585                            | 1935    | 2285 | 2640 | 2990 | 3360 | 3695 | 4090 |
|                       | 25              | 1370                            | 1615    | 1865 | 2115 | 2375 | 2610 | 2890 |      |
|                       | 30              | 1340                            | 1585    | 1830 | 2075 | 2330 | 2560 | 2835 |      |
|                       | 40              | 1290                            | 1525    | 1760 | 1995 | 2240 | 2465 | 2725 |      |
|                       | 50              | 1290                            | 1525    | 1760 | 1995 | 2240 | 2465 | 2725 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 400/70 R 18 IND 147 A8/B TL ENDURION

|                       |                  |                                 |         |      |      |      |      |      |      |
|-----------------------|------------------|---------------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692335389    | Section width                   | 410 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar          | Overall diameter                | 1015 mm |      |      |      |      |      |      |
| Tyre construction     | Radial           | Static loaded radius            | 465 mm  |      |      |      |      |      |      |
| Recommended rim width | 13               | Rolling circumference           | 3050 mm |      |      |      |      |      |      |
| Permitted rim width   | 12SDC, 13SDC, 14 | SRI                             | 475     |      |      |      |      |      |      |
| Alternative tyre size | 405/70 R 18      | Tread depth (including tie bar) | 25 mm   |      |      |      |      |      |      |
|                       | 16.0/70 R 18     | Tie bar height                  | 3 mm    |      |      |      |      |      |      |
|                       |                  | 75% of the tyre volume          | 109 l   |      |      |      |      |      |      |
|                       |                  | Tyre pressure (bar)             |         |      |      |      |      |      |      |
|                       |                  | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |
|                       |                  | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |
| Speed (km/h)          | 0                | 2780                            | 3395    | 4015 | 4630 | 5250 | 5920 | 6485 | 7070 |
|                       | 10Ci             | 1810                            | 2215    | 2620 | 3020 | 3425 | 3865 | 4230 | 4615 |
|                       | 25               | 1565                            | 1850    | 2135 | 2420 | 2730 | 2990 | 3260 |      |
|                       | 30               | 1535                            | 1815    | 2095 | 2375 | 2680 | 2930 | 3200 |      |
|                       | 40               | 1475                            | 1745    | 2015 | 2280 | 2575 | 2820 | 3075 |      |
|                       | 50               | 1475                            | 1745    | 2015 | 2280 | 2575 | 2820 | 3075 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# AGRI INDUSTRIAL TYRES — FOR HARD SURFACES

## 340/80 R 20 IND 144 A8/B TL ENDURION

|                       |                              |                                 |         |
|-----------------------|------------------------------|---------------------------------|---------|
| EAN                   | 8714692336584                | Section width                   | 355 mm  |
| Nominal tyre pressure | 4,0 bar                      | Overall diameter                | 1055 mm |
| Tyre construction     | Radial                       | Static loaded radius            | 490 mm  |
| Recommended rim width | 11                           | Rolling circumference           | 3180 mm |
| Permitted rim width   | W10, W11,<br>11SDC, 12, 12SC | SRI                             | 500     |
| Alternative tyre size | 335/80 R 20<br>12.5 R 20     | Tread depth (including tie bar) | 26 mm   |
|                       |                              | Tie bar height                  | 3 mm    |
|                       |                              | 75% of the tyre volume          | 96 l    |

|              |      | Tyre pressure (bar)        |      |      |      |      |      |      |      |
|--------------|------|----------------------------|------|------|------|------|------|------|------|
|              |      | 1,60                       | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |
|              |      | Load capacity per tyre(kg) |      |      |      |      |      |      |      |
| Speed (km/h) | 0    | 2540                       | 3105 | 3670 | 4235 | 4795 | 5430 | 5925 | 6440 |
|              | 10Ci | 1655                       | 2025 | 2390 | 2760 | 3130 | 3540 | 3865 | 4200 |
|              | 25   | 1430                       | 1690 | 1950 | 2210 | 2500 | 2730 | 2970 |      |
|              | 30   | 1405                       | 1660 | 1915 | 2170 | 2455 | 2680 | 2910 |      |
|              | 40   | 1350                       | 1595 | 1840 | 2085 | 2360 | 2575 | 2800 |      |
|              | 50   | 1350                       | 1595 | 1840 | 2085 | 2360 | 2575 | 2800 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 400/70 R 20 IND 149 A8/B TL ENDURION

|                       |                             |                                 |         |
|-----------------------|-----------------------------|---------------------------------|---------|
| EAN                   | 8714692335396               | Section width                   | 405 mm  |
| Nominal tyre pressure | 4,0 bar                     | Overall diameter                | 1070 mm |
| Tyre construction     | Radial                      | Static loaded radius            | 490 mm  |
| Recommended rim width | 13                          | Rolling circumference           | 3245 mm |
| Permitted rim width   | 12SDC, 13SDC, 14            | SRI                             | 525     |
| Alternative tyre size | 405/70 R 20<br>16.0/70 R 20 | Tread depth (including tie bar) | 25 mm   |
|                       |                             | Tie bar height                  | 3 mm    |
|                       |                             | 75% of the tyre volume          | 116 l   |

|              |      | Tyre pressure (bar)        |      |      |      |      |      |      |      |
|--------------|------|----------------------------|------|------|------|------|------|------|------|
|              |      | 1,60                       | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |
|              |      | Load capacity per tyre(kg) |      |      |      |      |      |      |      |
| Speed (km/h) | 0    | 2905                       | 3550 | 4195 | 4840 | 5485 | 6095 | 6780 | 7475 |
|              | 10Ci | 1895                       | 2315 | 2735 | 3160 | 3580 | 3975 | 4420 | 4875 |
|              | 25   | 1635                       | 1935 | 2230 | 2530 | 2810 | 3125 | 3445 |      |
|              | 30   | 1605                       | 1895 | 2190 | 2480 | 2755 | 3065 | 3380 |      |
|              | 40   | 1545                       | 1825 | 2105 | 2385 | 2650 | 2945 | 3250 |      |
|              | 50   | 1545                       | 1825 | 2105 | 2385 | 2650 | 2945 | 3250 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# AGRI INDUSTRIAL TYRES FOR HARD SURFACES

## 400/70 R 24 IND 152 A8/B TL ENDURION

|                       |                  |                                 |         |      |      |      |      |      |      |  |
|-----------------------|------------------|---------------------------------|---------|------|------|------|------|------|------|--|
| EAN                   | 8714692335402    | Section width                   | 405 mm  |      |      |      |      |      |      |  |
| Nominal tyre pressure | 4,0 bar          | Overall diameter                | 1170 mm |      |      |      |      |      |      |  |
| Tyre construction     | Radial           | Static loaded radius            | 540 mm  |      |      |      |      |      |      |  |
| Recommended rim width | 13               | Rolling circumference           | 3510 mm |      |      |      |      |      |      |  |
| Permitted rim width   | W10, W11,        | SRI                             | 500     |      |      |      |      |      |      |  |
| Alternative tyre size | 12SDC, 13SDC, 14 | Tread depth (including tie bar) | 25 mm   |      |      |      |      |      |      |  |
|                       | 405/70 R 24      | Tie bar height                  | 3 mm    |      |      |      |      |      |      |  |
|                       | 16.0/70 R 24     | 75% of the tyre volume          | 130 l   |      |      |      |      |      |      |  |
|                       |                  | Tyre pressure (bar)             |         |      |      |      |      |      |      |  |
|                       |                  | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 |  |
|                       |                  | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |  |
| Speed (km/h)          | 0                | 3150                            | 3850    | 4550 | 5250 | 5950 | 6670 | 7350 | 8165 |  |
|                       | 10Ci             | 2055                            | 2510    | 2965 | 3425 | 3880 | 4350 | 4795 | 5325 |  |
|                       | 25               | 1775                            | 2095    | 2420 | 2740 | 3075 | 3385 | 3765 |      |  |
|                       | 30               | 1740                            | 2055    | 2375 | 2690 | 3015 | 3325 | 3690 |      |  |
|                       | 40               | 1675                            | 1980    | 2285 | 2585 | 2900 | 3195 | 3550 |      |  |
|                       | 50               | 1675                            | 1980    | 2285 | 2585 | 2900 | 3195 | 3550 |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 400/80 R 24 IND 162 A8/B TL ENDURION

|                       |               |                                 |         |      |      |      |      |      |      |       |
|-----------------------|---------------|---------------------------------|---------|------|------|------|------|------|------|-------|
| EAN                   | 8714692335419 | Section width                   | 410 mm  |      |      |      |      |      |      |       |
| Nominal tyre pressure | 5,0 bar       | Overall diameter                | 1245 mm |      |      |      |      |      |      |       |
| Tyre construction     | Radial        | Static loaded radius            | 570 mm  |      |      |      |      |      |      |       |
| Recommended rim width | DW13          | Rolling circumference           | 3720 mm |      |      |      |      |      |      |       |
| Permitted rim width   | 13            | SRI                             | 600     |      |      |      |      |      |      |       |
| Alternative tyre size | 15.5/80 R 24  | Tread depth (including tie bar) | 30 mm   |      |      |      |      |      |      |       |
|                       |               | Tie bar height                  | 3 mm    |      |      |      |      |      |      |       |
|                       |               | 75% of the tyre volume          | 158 l   |      |      |      |      |      |      |       |
|                       |               | Tyre pressure (bar)             |         |      |      |      |      |      |      |       |
|                       |               | 1,60                            | 2,00    | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 | 5,00  |
|                       |               | Load capacity per tyre(kg)      |         |      |      |      |      |      |      |       |
| Speed (km/h)          | 0             | 3545                            | 4335    | 5120 | 5910 | 6695 | 7475 | 8275 | 9200 | 10240 |
|                       | 10Ci          | 2310                            | 2825    | 3340 | 3855 | 4365 | 4875 | 5395 | 6000 | 6680  |
|                       | 25            | 1995                            | 2360    | 2725 | 3085 | 3445 | 3815 | 4240 | 4540 | 5035  |
|                       | 30            | 1960                            | 2315    | 2670 | 3030 | 3380 | 3740 | 4160 | 4455 | 4940  |
|                       | 40            | 1885                            | 2225    | 2570 | 2910 | 3250 | 3595 | 4000 | 4280 | 4750  |
|                       | 50            | 1885                            | 2225    | 2570 | 2910 | 3250 | 3595 | 4000 | 4280 | 4750  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# AGRI INDUSTRIAL TYRES — FOR HARD SURFACES

## 460/70 R 24 IND 159 A8/B TL ENDURION

|                       |               |                                 |         |
|-----------------------|---------------|---------------------------------|---------|
| EAN                   | 8714692310003 | Section width                   | 480 mm  |
| Nominal tyre pressure | 4,0 bar       | Overall diameter                | 1265 mm |
| Tyre construction     | Radial        | Static loaded radius            | 570 mm  |
| Recommended rim width | DW15L         | Rolling circumference           | 3820 mm |
| Permitted rim width   | DW14L, DW16L  | SRI                             | 600     |
| Alternative tyre size | 17.5 LR 24    | Tread depth (including tie bar) | 30 mm   |
| EAN Tube              | 8714692332685 | Tie bar height                  | 3 mm    |
|                       |               | 75% of the tyre volume          | 199 l   |

|              |      | Tyre pressure (bar)        |      |      |      |      |      |      |       |
|--------------|------|----------------------------|------|------|------|------|------|------|-------|
|              |      | 1,60                       | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40  |
|              |      | Load capacity per tyre(kg) |      |      |      |      |      |      |       |
| Speed (km/h) | 0    | 3915                       | 4785 | 5655 | 6520 | 7390 | 8165 | 9130 | 10065 |
|              | 10Ci | 2550                       | 3120 | 3685 | 4255 | 4820 | 5325 | 5955 | 6565  |
|              | 25   | 2205                       | 2605 | 3005 | 3405 | 3765 | 4210 | 4640 |       |
|              | 30   | 2165                       | 2555 | 2950 | 3340 | 3690 | 4130 | 4550 |       |
|              | 40   | 2080                       | 2460 | 2835 | 3215 | 3550 | 3970 | 4375 |       |
|              | 50   | 2080                       | 2460 | 2835 | 3215 | 3550 | 3970 | 4375 |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 500/70 R 24 IND 164 A8/B TL ENDURION

|                       |               |                                 |         |
|-----------------------|---------------|---------------------------------|---------|
| EAN                   | 8714692310027 | Section width                   | 520 mm  |
| Nominal tyre pressure | 4,0 bar       | Overall diameter                | 1315 mm |
| Tyre construction     | Radial        | Static loaded radius            | 595 mm  |
| Recommended rim width | DW16L         | Rolling circumference           | 4000 mm |
| Permitted rim width   | DW15L, DW18L  | SRI                             | 625     |
| Alternative tyre size | 19.5 LR 24    | Tread depth (including tie bar) | 30 mm   |
| EAN Tube              | 8714692332692 | Tie bar height                  | 3 mm    |
|                       |               | 75% of the tyre volume          | 246 l   |

|              |      | Tyre pressure (bar)        |      |      |      |      |      |       |       |
|--------------|------|----------------------------|------|------|------|------|------|-------|-------|
|              |      | 1,60                       | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00  | 4,40  |
|              |      | Load capacity per tyre(kg) |      |      |      |      |      |       |       |
| Speed (km/h) | 0    | 4460                       | 5450 | 6445 | 7435 | 8425 | 9490 | 10410 | 11500 |
|              | 10Ci | 2910                       | 3555 | 4200 | 4850 | 5495 | 6190 | 6790  | 7500  |
|              | 25   | 2515                       | 2970 | 3425 | 3885 | 4375 | 4795 | 5300  |       |
|              | 30   | 2465                       | 2915 | 3360 | 3810 | 4290 | 4705 | 5200  |       |
|              | 40   | 2370                       | 2800 | 3230 | 3665 | 4125 | 4525 | 5000  |       |
|              | 50   | 2370                       | 2800 | 3230 | 3665 | 4125 | 4525 | 5000  |       |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# AGRI INDUSTRIAL TYRES FOR HARD SURFACES

## 480/80 R 26 IND 160 A8/B TL ENDURION

|                       |               |                                 |         |
|-----------------------|---------------|---------------------------------|---------|
| EAN                   | 8714692310041 | Section width                   | 495 mm  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter                | 1440 mm |
| Tyre construction     | Radial        | Static loaded radius            | 645 mm  |
| Recommended rim width | DW15L         | Rolling circumference           | 4320 mm |
| Permitted rim width   | DW16L         | SRI                             | 675     |
| Alternative tyre size | 18.4 R 26     | Tread depth (including tie bar) | 30 mm   |
|                       |               | Tie bar height                  | 3 mm    |
|                       |               | 75% of the tyre volume          | 283 l   |
|                       |               | Tyre pressure (bar)             |         |
|                       |               | 1,60                            | 2,00    |
|                       |               | 2,40                            | 2,80    |
|                       |               | 3,20                            | 3,60    |
|                       |               | Load capacity per tyre(kg)      |         |
| Speed (km/h)          | 0             | 4885                            | 5970    |
|                       | 10Ci          | 3185                            | 3895    |
|                       | 25            | 2750                            | 3255    |
|                       | 30            | 2700                            | 3190    |
|                       | 40            | 2595                            | 3070    |
|                       | 50            | 2595                            | 3070    |
|                       |               | 7055                            | 8145    |
|                       |               | 4605                            | 5310    |
|                       |               | 3755                            | 4255    |
|                       |               | 3680                            | 4175    |
|                       |               | 3540                            | 4015    |
|                       |               | 3540                            | 4015    |
|                       |               | 9230                            | 10350   |
|                       |               | 6020                            | 6750    |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 440/80 R 28 IND 156 A8/B TL ENDURION

|                       |               |                                 |         |
|-----------------------|---------------|---------------------------------|---------|
| EAN                   | 8714692310065 | Section width                   | 455 mm  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter                | 1420 mm |
| Tyre construction     | Radial        | Static loaded radius            | 640 mm  |
| Recommended rim width | DW14L         | Rolling circumference           | 4290 mm |
| Permitted rim width   | DW13L, DW15L  | SRI                             | 675     |
| Alternative tyre size | 16.9 R 28     | Tread depth (including tie bar) | 30 mm   |
|                       |               | Tie bar height                  | 3 mm    |
|                       |               | 75% of the tyre volume          | 238 l   |
|                       |               | Tyre pressure (bar)             |         |
|                       |               | 1,60                            | 2,00    |
|                       |               | 2,40                            | 2,80    |
|                       |               | 3,20                            | 3,60    |
|                       |               | Load capacity per tyre(kg)      |         |
| Speed (km/h)          | 0             | 4405                            | 5380    |
|                       | 10Ci          | 2870                            | 3510    |
|                       | 25            | 2480                            | 2930    |
|                       | 30            | 2435                            | 2875    |
|                       | 40            | 2340                            | 2765    |
|                       | 50            | 2340                            | 2765    |
|                       |               | 6360                            | 7340    |
|                       |               | 4150                            | 4785    |
|                       |               | 3380                            | 3835    |
|                       |               | 3320                            | 3760    |
|                       |               | 3190                            | 3615    |
|                       |               | 3190                            | 3615    |
|                       |               | 8315                            | 9200    |
|                       |               | 5425                            | 6000    |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# AGRI INDUSTRIAL TYRES — FOR HARD SURFACES







# TRAILER AND IMPLEMENT TYRES

## Pag.

Radial implement tyre conversion table 144

## Radial

Endurion Trailer 147  
Flotation Trac 150  
Flotation Pro 170

## Bias

Flotation+ 180  
AW 192  
AS 202  
V61 206



# RADIAL IMPLEMENT TYRE CONVERSION TABLE

|                       |      | Section width (mm) |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |     |
|-----------------------|------|--------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|------------------|-----|
|                       |      | 480                | 500              | 520              | 560              | 580              | 600              | 620              | 650              | 680              | 710              | 750              | 800              | 850              | 900 |
| Overall diameter (mm) | 860  | 480/45<br>R 17     |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |     |
|                       | 960  |                    |                  | 520/50<br>R 17   |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |     |
|                       | 1030 |                    | 500/45<br>R 22.5 |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |     |
|                       | 1070 |                    |                  |                  | 560/45<br>R 22.5 |                  |                  | 620/40<br>R 22.5 | 650/40<br>R 22.5 |                  |                  |                  |                  |                  |     |
|                       | 1150 |                    |                  | 520/55<br>R 22.5 |                  |                  | 600/50<br>R 22.5 | 620/50<br>R 22.5 |                  |                  | 710/40<br>R 22.5 |                  |                  |                  |     |
|                       | 1250 |                    |                  |                  | 560/60<br>R 22.5 |                  |                  |                  |                  |                  |                  |                  |                  |                  |     |
|                       |      |                    |                  |                  | 560/60<br>R 22.5 |                  |                  |                  | 650/50<br>R 22.5 | 680/50<br>R 22.5 | 710/45<br>R 22.5 |                  | 800/40<br>R 22.5 |                  |     |
|                       |      |                    |                  |                  | 560/60<br>R 22.5 |                  |                  |                  |                  |                  |                  |                  |                  |                  |     |
|                       | 1300 |                    |                  |                  |                  | 580/65<br>R 22.5 |                  |                  |                  |                  |                  |                  |                  |                  |     |
|                       | 1360 |                    |                  |                  |                  |                  | 600/55<br>R 26.5 | 620/55<br>R 26.5 | 650/55<br>R 26.5 |                  | 710/50<br>R 26.5 | 750/45<br>R 26.5 | 800/45<br>R 26.5 |                  |     |
|                       |      |                    |                  |                  |                  |                  | 600/55<br>R 26.5 |                  | 650/55<br>R 26.5 |                  | 710/50<br>R 26.5 |                  | 800/45<br>R 26.5 |                  |     |
|                       | 1500 |                    |                  |                  |                  |                  | 600/60<br>R 30.5 |                  | 650/65<br>R 26.5 |                  | 710/50<br>R 30.5 |                  | 800/45<br>R 30.5 |                  |     |
|                       |      |                    |                  |                  |                  |                  | 600/60<br>R 30.5 |                  |                  |                  |                  |                  |                  |                  |     |
|                       | 1550 |                    |                  |                  |                  |                  |                  |                  |                  |                  | 710/65<br>R 26   |                  |                  |                  |     |
|                       | 1650 |                    |                  |                  |                  |                  |                  |                  | 650/65<br>R 30.5 |                  |                  | 750/60<br>R 30.5 |                  | 850/50<br>R 30.5 |     |
|                       | 1800 |                    |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  | 800/60<br>R 32   |                  |     |
| 1980                  |      |                    |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  | 900/65<br>R 32   |     |
| 2150                  |      |                    |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  |                  | 900/65<br>R 38   |     |

|                   |                     |                  |
|-------------------|---------------------|------------------|
| FLOTATION<br>TRAC | ENDURION<br>TRAILER | FLOTATION<br>PRO |
|-------------------|---------------------|------------------|



# TRAILER AND IMPLEMENT TYRES

## FLOTATION TRAC EXPLAINED

THE PROVEN CONCEPT OF THE VREDESTEIN TRAXION TYRES APPLIED IN A FLOTATION TYRE

Vredestein tyres provide the lowest total cost of ownership. The Flotation Trac excels in a low rolling resistance on the road and in the field, as well as in preserving your soil.

- Open shoulder profiling
- Stable central section



### BENEFITS TRACTION ZONE

Transverse lugs and open space between lugs leading to:

- continues rolling, even in the most difficult conditions
- excellent side grip for stable driving behavior on slopes

### BENEFITS COMFORT ZONE

Stable central section with rubber in driving direction leading to:

- stable driving behaviour on the road
- long tyre life

### NON-PARALLEL LUGS

Unique non-parallel lugs with increasing gap from the centre to the shoulder, to easily push out the soil. This enhanced self-cleaning ensures the tyre keeps the traction, which leads to optimum productivity.





# IMPLEMENT RADIAL —



## ENDURION TRAILER

HEAVY-DUTY TRAILER TYRES WITH A  
DIRECTIONAL TREAD PATTERN, DESIGNED  
FOR A SUPERIOR SERVICE LIFE

### FEATURES

Heavy-duty carcass fitted with steel belt and a reinforcement ring

Traxion design with unique tread compound and a large contact area in the middle of the tyre tread

Non-parallel cleats that run from the inside to the outside of the tread






### BENEFITS

Extremely robust with excellent resistance to punctures

30% longer service life\*

Excellent self-cleaning properties on all types of soil

\* Compared with premium competitors when tested in accordance with Vredestein R&D testing programmes

| Ø    | Tyre size         | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |   |
|------|-------------------|---------------------|----------------------------------|--|---|---|---|---|------|---|
| 22,5 | 560/60 R 22.5 IMP | 165 D               | 5,0                              | AG 16.00   | 560*  | 1245*   | 560*  | 3820*   | 148  | N |
| 26,5 | 600/55 R 26.5 IMP | 169 D               | 5,0                              | AG 20.00   | 610*  | 1345*   | 620*  | 4155*   | 148  | N |
|      | 650/55 R 26.5 IMP | 173 D               | 5,0                              | AG 20.00   | 655*  | 1400*   | 635*  | 4300*   | 149  | N |
| 30,5 | 600/60 R 30.5 IMP | 173 D               | 5,0                              | AG 20.00   | 615*  | 1505*   | 710*  | 4675*   | 149  | N |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

# IMPLEMENT RADIAL —

## 560/60 R 22.5 IMP 165 D TL ENDURION TRAILER

|                       |               |      |                            |          |      |      |      |      |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|----------|------|------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692892905 |      | Section width              | 560* mm  |      |      |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 5,0 bar       |      | Overall diameter           | 1245* mm |      |      |      |      |      |      |      |      |      |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 560* mm  |      |      |      |      |      |      |      |      |      |      |
| Recommended rim width | AG 16.00      |      | Rolling circumference      | 3820* mm |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | SRI                        | 600      |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | Tread depth                | 23 mm    |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | 75% of the tyre volume     | 256 l    |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |          |      |      |      |      |      |      |      |      |      |      |
|                       |               |      | 0,80                       | 1,20     | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40 | 4,80 | 5,00 |
|                       |               |      | Load capacity per tyre(kg) |          |      |      |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 2660 | 3425                       | 4185     | 4850 | 5565 | 6265 | 6890 | 7615 | 8285 | 8675 | 9115 | 9270 |      |
|                       | 25            | 2335 | 3005                       | 3670     | 4260 | 4885 | 5500 | 6045 | 6680 | 7270 | 7615 | 8000 | 8135 |      |
|                       | 30            | 2235 | 2870                       | 3510     | 4070 | 4665 | 5255 | 5780 | 6385 | 6950 | 7280 | 7645 | 7775 |      |
|                       | 40            | 2010 | 2585                       | 3160     | 3665 | 4205 | 4735 | 5205 | 5750 | 6260 | 6555 | 6885 | 7005 |      |
|                       | 50            | 1790 | 2300                       | 2810     | 3260 | 3740 | 4210 | 4630 | 5120 | 5570 | 5835 | 6125 | 6230 |      |
|                       | 65            | 1480 | 1900                       | 2325     | 2695 | 3090 | 3480 | 3825 | 4230 | 4600 | 4820 | 5065 | 5150 |      |
|                       | 70            | 1345 | 1730                       | 2115     | 2455 | 2810 | 3165 | 3480 | 3850 | 4190 | 4385 | 4610 | 4685 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

## 600/55 R 26.5 IMP 169 D TL ENDURION TRAILER

|                       |               |      |                            |          |      |      |      |      |      |      |      |       |       |      |
|-----------------------|---------------|------|----------------------------|----------|------|------|------|------|------|------|------|-------|-------|------|
| EAN                   | 8714692892912 |      | Section width              | 610* mm  |      |      |      |      |      |      |      |       |       |      |
| Nominal tyre pressure | 5,0 bar       |      | Overall diameter           | 1345* mm |      |      |      |      |      |      |      |       |       |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 620* mm  |      |      |      |      |      |      |      |       |       |      |
| Recommended rim width | AG 20.00      |      | Rolling circumference      | 4155* mm |      |      |      |      |      |      |      |       |       |      |
|                       |               |      | SRI                        | 625      |      |      |      |      |      |      |      |       |       |      |
|                       |               |      | Tread depth                | 25 mm    |      |      |      |      |      |      |      |       |       |      |
|                       |               |      | 75% of the tyre volume     | 302 l    |      |      |      |      |      |      |      |       |       |      |
|                       |               |      | Tyre pressure (bar)        |          |      |      |      |      |      |      |      |       |       |      |
|                       |               |      | 0,80                       | 1,20     | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 | 4,40  | 4,80  | 5,00 |
|                       |               |      | Load capacity per tyre(kg) |          |      |      |      |      |      |      |      |       |       |      |
| Speed (km/h)          | 10            | 2945 | 3785                       | 4625     | 5365 | 6150 | 6930 | 7620 | 8420 | 9160 | 9595 | 10080 | 10440 |      |
|                       | 25            | 2585 | 3325                       | 4060     | 4710 | 5400 | 6080 | 6685 | 7390 | 8040 | 8425 | 8850  | 9165  |      |
|                       | 30            | 2470 | 3175                       | 3880     | 4500 | 5160 | 5810 | 6390 | 7065 | 7685 | 8050 | 8455  | 8760  |      |
|                       | 40            | 2225 | 2860                       | 3495     | 4055 | 4650 | 5235 | 5755 | 6360 | 6920 | 7250 | 7615  | 7890  |      |
|                       | 50            | 1980 | 2545                       | 3110     | 3605 | 4135 | 4655 | 5120 | 5660 | 6160 | 6450 | 6775  | 7020  |      |
|                       | 65            | 1635 | 2105                       | 2570     | 2980 | 3420 | 3850 | 4230 | 4680 | 5090 | 5330 | 5600  | 5800  |      |
|                       | 70            | 1490 | 1915                       | 2340     | 2715 | 3110 | 3500 | 3850 | 4255 | 4630 | 4850 | 5095  | 5280  |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

## 650/55 R 26.5 IMP 173 D TL ENDURIUM TRAILER

|                       |    |                            |      |      |      |      |                        |      |          |       |       |       |       |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|----------|-------|-------|-------|-------|
| EAN                   |    | 8714692892929              |      |      |      |      | Section width          |      | 655* mm  |       |       |       |       |
| Nominal tyre pressure |    | 5,0 bar                    |      |      |      |      | Overall diameter       |      | 1400* mm |       |       |       |       |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 635* mm  |       |       |       |       |
| Recommended rim width |    | AG 20.00                   |      |      |      |      | Rolling circumference  |      | 4300* mm |       |       |       |       |
|                       |    |                            |      |      |      |      | SRI                    |      | 650      |       |       |       |       |
|                       |    |                            |      |      |      |      | Tread depth            |      | 26 mm    |       |       |       |       |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 370 l    |       |       |       |       |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |          |       |       |       |       |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60     | 4,00  | 4,40  | 4,80  | 5,00  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |          |       |       |       |       |
| Speed (km/h)          | 10 | 3335                       | 4290 | 5240 | 6080 | 6970 | 7850                   | 8630 | 9540     | 10380 | 10870 | 11420 | 11700 |
|                       | 25 | 2930                       | 3765 | 4600 | 5335 | 6120 | 6890                   | 7575 | 8375     | 9110  | 9545  | 10025 | 10270 |
|                       | 30 | 2800                       | 3600 | 4400 | 5100 | 5845 | 6585                   | 7240 | 8000     | 8705  | 9120  | 9580  | 9815  |
|                       | 40 | 2520                       | 3240 | 3960 | 4595 | 5265 | 5930                   | 6520 | 7205     | 7840  | 8215  | 8630  | 8840  |
|                       | 50 | 2240                       | 2885 | 3525 | 4085 | 4685 | 5275                   | 5800 | 6410     | 6975  | 7310  | 7675  | 7865  |
|                       | 65 | 1855                       | 2385 | 2910 | 3375 | 3870 | 4360                   | 4795 | 5300     | 5765  | 6040  | 6345  | 6500  |
|                       | 70 | 1685                       | 2170 | 2650 | 3075 | 3525 | 3970                   | 4365 | 4820     | 5245  | 5495  | 5775  | 5915  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

## 600/60 R 30.5 IMP 173 D TL ENDURIUM TRAILER

|                       |    |                            |      |      |      |      |                        |      |          |       |       |       |       |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|----------|-------|-------|-------|-------|
| EAN                   |    | 8714692892936              |      |      |      |      | Section width          |      | 615* mm  |       |       |       |       |
| Nominal tyre pressure |    | 5,0 bar                    |      |      |      |      | Overall diameter       |      | 1505* mm |       |       |       |       |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 710* mm  |       |       |       |       |
| Recommended rim width |    | AG 20.00                   |      |      |      |      | Rolling circumference  |      | 4675* mm |       |       |       |       |
|                       |    |                            |      |      |      |      | SRI                    |      | 725      |       |       |       |       |
|                       |    |                            |      |      |      |      | Tread depth            |      | 26 mm    |       |       |       |       |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 374 l    |       |       |       |       |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |          |       |       |       |       |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60     | 4,00  | 4,40  | 4,80  | 5,00  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |          |       |       |       |       |
| Speed (km/h)          | 10 | 3390                       | 4355 | 5325 | 6175 | 7080 | 7970                   | 8765 | 9685     | 10540 | 11040 | 11595 | 11700 |
|                       | 25 | 2975                       | 3825 | 4675 | 5420 | 6215 | 6995                   | 7695 | 8505     | 9250  | 9690  | 10180 | 10270 |
|                       | 30 | 2840                       | 3655 | 4465 | 5180 | 5940 | 6685                   | 7350 | 8125     | 8840  | 9260  | 9730  | 9815  |
|                       | 40 | 2560                       | 3290 | 4020 | 4665 | 5350 | 6020                   | 6620 | 7320     | 7965  | 8340  | 8760  | 8840  |
|                       | 50 | 2275                       | 2930 | 3580 | 4150 | 4760 | 5360                   | 5890 | 6510     | 7085  | 7420  | 7795  | 7865  |
|                       | 65 | 1880                       | 2420 | 2960 | 3430 | 3930 | 4430                   | 4870 | 5380     | 5855  | 6135  | 6445  | 6500  |
|                       | 70 | 1715                       | 2200 | 2690 | 3120 | 3580 | 4030                   | 4430 | 4895     | 5330  | 5580  | 5865  | 5915  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

# IMPLEMENT RADIAL —



## **FLOTATION** TRAC

THE ALL ROUND FLOTATION TYRE  
FOR MAXIMUM SOIL PROTECTION

### FEATURES

Stable central tread and rounded shoulders

Highly flexible carcass & sturdy belt design

Robust bead construction

### BENEFITS






Keeps rolling even in the most difficult conditions

Optimized footprint under varying inflation pressures

High degree of reliability



# FLOTATION TRAC

| Ø                 | Tyre size         | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|-------------------|-------------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 17                | 480/45 R 17 IMP   | 140 D               | 4,0                              | 16.00   | 480  | 850  | 395  | 2635   | 152  |
|                   | 520/50 R 17 IMP   | 141 D               | 3,2                              | 16.00   | 500  | 1025   | 475  | 3130   | 152  |
|                   | 520/50 R 17 IMP   | 147 D               | 4,0                              | 16.00   | 505  | 965  | 445  | 2970   | 153  |
| 22.5              | 500/45 R 22.5 IMP | 136 D               | 2,8                              | AG 16.00  | 505  | 965  | 445  | 2970   | 153  |
|                   | 520/55 R 22.5 IMP | 148 D               | 3,2                              | AG 16.00  | 515  | 1155   | 530  | 3560   | 154  |
|                   | 520/55 R 22.5 IMP | 154 D               | 4,0                              | AG 16.00  | 515  | 1155   | 530  | 3560   | 154  |
|                   | 560/45 R 22.5 IMP | 152 D               | 4,0                              | AG 16.00  | 545  | 1085   | 490  | 3295   | 155  |
|                   | 560/45 R 22.5 IMP | 160 D               | 6,0                              | AG 16.00  | 530  | 1080   | 500  | 3350   | 155  |
|                   | 560/60 R 22.5 IMP | 161 D               | 4,0                              | AG 16.00  | 550  | 1245   | 560  | 3820   | 156  |
|                   | 560/60 R 22.5 IMP | 165 D               | 5,0                              | AG 16.00  | 550  | 1245   | 560  | 3820   | 156  |
|                   | 580/65 R 22.5 IMP | 166 D               | 4,0                              | AG 18.00  | 585  | 1300   | 585  | 3985   | 157  |
|                   | 600/50 R 22.5 IMP | 159 D               | 4,0                              | AG 20.00  | 600  | 1170   | 530  | 3615   | 157  |
|                   | 650/40 R 22.5 IMP | 150 D               | 3,2                              | AG 20.00  | 635  | 1080   | 495  | 3360   | 158  |
|                   | 650/40 R 22.5 IMP | 156 D               | 4,0                              | AG 20.00  | 635  | 1080   | 495  | 3360   | 158  |
|                   | 680/50 R 22.5 IMP | 156 D               | 2,8                              | AG 20.00  | 670  | 1260   | 565  | 3880   | 159  |
|                   | 680/50 R 22.5 IMP | 166 D               | 4,0                              | AG 20.00  | 670  | 1260   | 565  | 3880   | 159  |
|                   | 710/40 R 22.5 IMP | 161 D               | 4,0                              | AG 24.00  | 700  | 1140   | 515  | 3470   | 160  |
|                   | 710/45 R 22.5 IMP | 165 D               | 4,0                              | AG 24.00  | 730  | 1230   | 570  | 3780   | 160  |
| 800/40 R 22.5 IMP | 168 D             | 4,0                 | AG 28.00                         | 790   | 1220   | 550  | 3700   | 161  |      |
| 26                | 710/65 R 26 IMP   | 179 D               | 4,0                              | DW 25B  | 755  | 1565   | 715  | 4855   | 161  |
| 26.5              | 600/55 R 26.5 IMP | 165 D               | 4,0                              | AG 20.00  | 620  | 1350   | 625  | 4170   | 162  |
|                   | 650/55 R 26.5 IMP | 169 D               | 4,0                              | AG 20.00  | 650  | 1400   | 635  | 4300   | 162  |
|                   | 650/65 R 26.5 IMP | 174 D               | 4,0                              | AG 20.00  | 670  | 1520   | 700  | 4680   | 163  |
|                   | 710/50 R 26.5 IMP | 170 D               | 4,0                              | AG 24.00  | 740  | 1365   | 635  | 4265   | 163  |
|                   | 750/45 R 26.5 IMP | 170 D               | 4,0                              | AG 24.00  | 745  | 1365   | 620  | 4180   | 164  |
|                   | 800/45 R 26.5 IMP | 174 D               | 4,0                              | AG 28.00  | 800  | 1380   | 640  | 4300   | 164  |
| 30.5              | 600/60 R 30.5 IMP | 169 D               | 4,0                              | AG 20.00  | 610  | 1505   | 710  | 4675   | 165  |
|                   | 650/65 R 30.5 IMP | 176 D               | 4,0                              | AG 20.00  | 645  | 1635   | 755  | 5075   | 165  |
|                   | 710/50 R 30.5 IMP | 173 D               | 4,0                              | AG 24.00  | 730  | 1495   | 680  | 4530   | 166  |
|                   | 750/60 R 30.5 IMP | 181 D               | 4,0                              | AG 24.00  | 785  | 1695   | 785  | 5130   | 166  |
|                   | 800/45 R 30.5 IMP | 176 D               | 4,0                              | AG 28.00  | 810  | 1510   | 700  | 4710   | 167  |
|                   | 850/50 R 30.5 IMP | 182 D               | 4,0                              | AG 28.00  | 870  | 1655   | 725  | 4910   | 167  |
| 32                | 800/60 R 32 IMP   | 185 D               | 4,0                              | DW 27B  | 810  | 1795   | 810  | 5550   | 168  |
|                   | 900/65 R 32 IMP   | 188 D               | 3,2                              | DW30B   | 915  | 1955   | 875  | 5965   | 168  |
| 38                | 900/65 R 38 IMP   | 191 D               | 3,2                              | DW30B   | 905  | 2110   | 940  | 6400   | 169  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 480/45 R 17 IMP 140 D TL FLOTATION TRAC

|                       |               |                            |         |      |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692360435 | Section width              | 480 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar       | Overall diameter           | 850 mm  |      |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 395 mm  |      |      |      |      |      |      |      |
| Recommended rim width | 16.00         | Rolling circumference      | 2635 mm |      |      |      |      |      |      |      |
|                       |               | SRI                        | 410     |      |      |      |      |      |      |      |
|                       |               | Tread depth                | 23 mm   |      |      |      |      |      |      |      |
|                       |               | Tie bar height             | 8 mm    |      |      |      |      |      |      |      |
|                       |               | 75% of the tyre volume     | 88 l    |      |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |
|                       |               | 0,80                       | 1,20    | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 1430                       | 1955    | 2315 | 2655 | 3015 | 3365 | 3710 | 4085 | 4500 |
|                       | 25            | 1255                       | 1715    | 2035 | 2330 | 2645 | 2950 | 3255 | 3585 | 3950 |
|                       | 30            | 1200                       | 1640    | 1945 | 2225 | 2530 | 2820 | 3110 | 3430 | 3775 |
|                       | 40            | 1080                       | 1475    | 1750 | 2005 | 2280 | 2540 | 2800 | 3090 | 3400 |
|                       | 50            | 960                        | 1315    | 1555 | 1785 | 2025 | 2260 | 2495 | 2745 | 3025 |
|                       | 65            | 795                        | 1085    | 1285 | 1475 | 1675 | 1870 | 2060 | 2270 | 2500 |
|                       | 70            | 725                        | 985     | 1170 | 1340 | 1525 | 1700 | 1875 | 2065 | 2275 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 520/50 R 17 IMP 141 D TL FLOTATION TRAC

|                       |               |                            |         |      |      |      |      |      |  |  |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|--|--|
| EAN                   | 8714692291586 | Section width              | 505 mm  |      |      |      |      |      |  |  |
| Nominal tyre pressure | 3,2 bar       | Overall diameter           | 965 mm  |      |      |      |      |      |  |  |
| Tyre construction     | Radial        | Static loaded radius       | 445 mm  |      |      |      |      |      |  |  |
| Recommended rim width | 16.00         | Rolling circumference      | 2970 mm |      |      |      |      |      |  |  |
|                       |               | SRI                        | 450     |      |      |      |      |      |  |  |
|                       |               | Tread depth                | 17 mm   |      |      |      |      |      |  |  |
|                       |               | Tie bar height             | 6 mm    |      |      |      |      |      |  |  |
|                       |               | 75% of the tyre volume     | 133 l   |      |      |      |      |      |  |  |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |  |  |
|                       |               | 0,80                       | 1,20    | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 |  |  |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |  |  |
| Speed (km/h)          | 10            | 1780                       | 2435    | 2890 | 3310 | 3760 | 4195 | 4635 |  |  |
|                       | 25            | 1565                       | 2135    | 2535 | 2905 | 3300 | 3680 | 4070 |  |  |
|                       | 30            | 1495                       | 2045    | 2425 | 2775 | 3155 | 3520 | 3890 |  |  |
|                       | 40            | 1345                       | 1840    | 2180 | 2500 | 2840 | 3170 | 3500 |  |  |
|                       | 50            | 1200                       | 1635    | 1940 | 2225 | 2525 | 2820 | 3115 |  |  |
|                       | 65            | 990                        | 1355    | 1605 | 1840 | 2090 | 2330 | 2575 |  |  |
|                       | 70            | 900                        | 1230    | 1460 | 1675 | 1900 | 2120 | 2345 |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



## 520/50 R 17 IMP 147 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|
| EAN                   |    | 8714692291593              |      |      |      | Section width          |      | 505 mm  |      |      |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 965 mm  |      |      |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 445 mm  |      |      |
| Recommended rim width |    | 16.00                      |      |      |      | Rolling circumference  |      | 2970 mm |      |      |
|                       |    |                            |      |      |      | SRI                    |      | 450     |      |      |
|                       |    |                            |      |      |      | Tread depth            |      | 17 mm   |      |      |
|                       |    |                            |      |      |      | Tie bar height         |      | 6 mm    |      |      |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 133 l   |      |      |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    | 3,60 | 4,00 |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |
| Speed (km/h)          | 10 | 1780                       | 2435 | 2890 | 3310 | 3760                   | 4195 | 4635    | 5095 | 5535 |
|                       | 25 | 1565                       | 2135 | 2535 | 2905 | 3300                   | 3680 | 4070    | 4475 | 4860 |
|                       | 30 | 1495                       | 2045 | 2425 | 2775 | 3155                   | 3520 | 3890    | 4275 | 4645 |
|                       | 40 | 1345                       | 1840 | 2180 | 2500 | 2840                   | 3170 | 3500    | 3850 | 4180 |
|                       | 50 | 1200                       | 1635 | 1940 | 2225 | 2525                   | 2820 | 3115    | 3425 | 3720 |
|                       | 65 | 990                        | 1355 | 1605 | 1840 | 2090                   | 2330 | 2575    | 2830 | 3075 |
|                       | 70 | 900                        | 1230 | 1460 | 1675 | 1900                   | 2120 | 2345    | 2575 | 2800 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 500/45 R 22.5 IMP 136 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |  |  |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|--|--|
| EAN                   |    | 8714692360442              |      |      |      | Section width          |      | 500 mm  |  |  |
| Nominal tyre pressure |    | 2,8 bar                    |      |      |      | Overall diameter       |      | 1025 mm |  |  |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 475 mm  |  |  |
| Recommended rim width |    | 16.00                      |      |      |      | Rolling circumference  |      | 3130 mm |  |  |
|                       |    |                            |      |      |      | SRI                    |      | 500     |  |  |
|                       |    |                            |      |      |      | Tread depth            |      | 23 mm   |  |  |
|                       |    |                            |      |      |      | Tie bar height         |      | 8 mm    |  |  |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 127 l   |  |  |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |  |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 |         |  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |  |  |
| Speed (km/h)          | 10 | 1730                       | 2365 | 2805 | 3215 | 3710                   | 4030 |         |  |  |
|                       | 25 | 1520                       | 2075 | 2465 | 2825 | 3260                   | 3540 |         |  |  |
|                       | 30 | 1455                       | 1985 | 2355 | 2700 | 3115                   | 3380 |         |  |  |
|                       | 40 | 1310                       | 1790 | 2120 | 2430 | 2805                   | 3045 |         |  |  |
|                       | 50 | 1165                       | 1590 | 1885 | 2160 | 2495                   | 2710 |         |  |  |
|                       | 65 | 960                        | 1315 | 1560 | 1785 | 2060                   | 2240 |         |  |  |
|                       | 70 | 875                        | 1195 | 1420 | 1625 | 1875                   | 2040 |         |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 520/55 R 22.5 IMP 148 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |  |  |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|--|--|
| EAN                   |    | 8714692291609              |      |      |      | Section width          |      | 515 mm  |  |  |
| Nominal tyre pressure |    | 3,2 bar                    |      |      |      | Overall diameter       |      | 1155 mm |  |  |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 530 mm  |  |  |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3560 mm |  |  |
|                       |    |                            |      |      |      | SRI                    |      | 575     |  |  |
|                       |    |                            |      |      |      | Tread depth            |      | 17 mm   |  |  |
|                       |    |                            |      |      |      | Tie bar height         |      | 6 mm    |  |  |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 193 l   |  |  |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |  |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    |  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |  |  |
| Speed (km/h)          | 10 | 2190                       | 2995 | 3550 | 4070 | 4625                   | 5155 | 5670    |  |  |
|                       | 25 | 1925                       | 2630 | 3120 | 3575 | 4060                   | 4525 | 4975    |  |  |
|                       | 30 | 1840                       | 2510 | 2980 | 3415 | 3880                   | 4325 | 4755    |  |  |
|                       | 40 | 1655                       | 2260 | 2685 | 3075 | 3495                   | 3895 | 4285    |  |  |
|                       | 50 | 1475                       | 2015 | 2385 | 2735 | 3110                   | 3465 | 3810    |  |  |
|                       | 65 | 1220                       | 1665 | 1975 | 2260 | 2570                   | 2865 | 3150    |  |  |
|                       | 70 | 1110                       | 1515 | 1795 | 2060 | 2335                   | 2605 | 2865    |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 520/55 R 22.5 IMP 154 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|
| EAN                   |    | 8714692291616              |      |      |      | Section width          |      | 515 mm  |      |      |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1155 mm |      |      |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 530 mm  |      |      |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3560 mm |      |      |
|                       |    |                            |      |      |      | SRI                    |      | 575     |      |      |
|                       |    |                            |      |      |      | Tread depth            |      | 17 mm   |      |      |
|                       |    |                            |      |      |      | Tie bar height         |      | 6 mm    |      |      |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 193 l   |      |      |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    | 3,60 | 4,00 |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |
| Speed (km/h)          | 10 | 2190                       | 2995 | 3550 | 4070 | 4625                   | 5155 | 5670    | 6265 | 6750 |
|                       | 25 | 1925                       | 2630 | 3120 | 3575 | 4060                   | 4525 | 4975    | 5500 | 5925 |
|                       | 30 | 1840                       | 2510 | 2980 | 3415 | 3880                   | 4325 | 4755    | 5255 | 5665 |
|                       | 40 | 1655                       | 2260 | 2685 | 3075 | 3495                   | 3895 | 4285    | 4735 | 5100 |
|                       | 50 | 1475                       | 2015 | 2385 | 2735 | 3110                   | 3465 | 3810    | 4215 | 4540 |
|                       | 65 | 1220                       | 1665 | 1975 | 2260 | 2570                   | 2865 | 3150    | 3480 | 3750 |
|                       | 70 | 1110                       | 1515 | 1795 | 2060 | 2335                   | 2605 | 2865    | 3170 | 3415 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 560/45 R 22.5 IMP 152 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |  |  |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|--|--|
| EAN                   |    | 8714692335532              |      |      |      | Section width          |      | 545 mm  |      |      |  |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1085 mm |      |      |  |  |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 490 mm  |      |      |  |  |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3295 mm |      |      |  |  |
|                       |    |                            |      |      |      | SRI                    |      | 525     |      |      |  |  |
|                       |    |                            |      |      |      | Tread depth            |      | 23 mm   |      |      |  |  |
|                       |    |                            |      |      |      | Tie bar height         |      | 8 mm    |      |      |  |  |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 154 l   |      |      |  |  |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |  |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    | 3,60 | 4,00 |  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |  |  |
| Speed (km/h)          | 10 | 2060                       | 2815 | 3340 | 3825 | 4345                   | 4845 | 5400    | 5890 | 6390 |  |  |
|                       | 25 | 1810                       | 2470 | 2930 | 3360 | 3815                   | 4255 | 4740    | 5170 | 5610 |  |  |
|                       | 30 | 1730                       | 2360 | 2800 | 3210 | 3645                   | 4065 | 4530    | 4940 | 5360 |  |  |
|                       | 40 | 1555                       | 2125 | 2520 | 2890 | 3285                   | 3660 | 4080    | 4450 | 4830 |  |  |
|                       | 50 | 1385                       | 1890 | 2245 | 2570 | 2920                   | 3260 | 3630    | 3960 | 4295 |  |  |
|                       | 65 | 1145                       | 1565 | 1855 | 2125 | 2415                   | 2695 | 3000    | 3270 | 3550 |  |  |
|                       | 70 | 1040                       | 1425 | 1690 | 1935 | 2195                   | 2450 | 2730    | 2980 | 3230 |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 560/45 R 22.5 IMP 160 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |      |      |      |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|------|------|
| EAN                   |    | 8714692350634              |      |      |      | Section width          |      | 545 mm  |      |      |      |      |      |
| Nominal tyre pressure |    | 6,0 bar                    |      |      |      | Overall diameter       |      | 1085 mm |      |      |      |      |      |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 490 mm  |      |      |      |      |      |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3295 mm |      |      |      |      |      |
|                       |    |                            |      |      |      | SRI                    |      | 525     |      |      |      |      |      |
|                       |    |                            |      |      |      | Tread depth            |      | 23 mm   |      |      |      |      |      |
|                       |    |                            |      |      |      | Tie bar height         |      | 8 mm    |      |      |      |      |      |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 154 l   |      |      |      |      |      |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |      |      |
|                       |    | 1,60                       | 2,00 | 2,40 | 2,80 | 3,20                   | 3,60 | 4,00    | 4,40 | 4,80 | 5,20 | 5,60 | 6,00 |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |      |      |
| Speed (km/h)          | 10 | 3235                       | 3755 | 4305 | 4845 | 5400                   | 5890 | 6390    | 6715 | 7050 | 7200 | 7810 | 8100 |
|                       | 25 | 2840                       | 3295 | 3780 | 4255 | 4740                   | 5170 | 5610    | 5895 | 6190 | 6320 | 6855 | 7110 |
|                       | 30 | 2715                       | 3150 | 3610 | 4065 | 4530                   | 4940 | 5360    | 5630 | 5915 | 6040 | 6555 | 6795 |
|                       | 40 | 2445                       | 2835 | 3250 | 3660 | 4080                   | 4450 | 4830    | 5070 | 5330 | 5440 | 5900 | 6120 |
|                       | 50 | 2175                       | 2525 | 2895 | 3260 | 3630                   | 3960 | 4295    | 4515 | 4740 | 4840 | 5250 | 5445 |
|                       | 65 | 1800                       | 2085 | 2390 | 2695 | 3000                   | 3270 | 3550    | 3730 | 3920 | 4000 | 4340 | 4500 |
|                       | 70 | 1635                       | 1900 | 2175 | 2450 | 2730                   | 2980 | 3230    | 3395 | 3565 | 3640 | 3950 | 4095 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 560/60 R 22.5 IMP 161 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |  |  |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|--|--|
| EAN                   |    | 8714692291623              |      |      |      | Section width          |      | 550 mm  |      |      |  |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1245 mm |      |      |  |  |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 560 mm  |      |      |  |  |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3820 mm |      |      |  |  |
| EAN Tube              |    | 8714692285044              |      |      |      | SRI                    |      | 600     |      |      |  |  |
|                       |    |                            |      |      |      | Tread depth            |      | 19 mm   |      |      |  |  |
|                       |    |                            |      |      |      | Tie bar height         |      | 7 mm    |      |      |  |  |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 251 l   |      |      |  |  |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |  |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    | 3,60 | 4,00 |  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |  |  |
| Speed (km/h)          | 10 | 2660                       | 3635 | 4315 | 4945 | 5615                   | 6265 | 6975    | 7615 | 8325 |  |  |
|                       | 25 | 2335                       | 3195 | 3785 | 4340 | 4930                   | 5500 | 6125    | 6680 | 7310 |  |  |
|                       | 30 | 2235                       | 3050 | 3620 | 4150 | 4710                   | 5255 | 5850    | 6385 | 6985 |  |  |
|                       | 40 | 2010                       | 2750 | 3260 | 3735 | 4245                   | 4735 | 5270    | 5750 | 6290 |  |  |
|                       | 50 | 1790                       | 2445 | 2900 | 3325 | 3775                   | 4210 | 4690    | 5120 | 5595 |  |  |
|                       | 65 | 1480                       | 2020 | 2395 | 2745 | 3120                   | 3480 | 3875    | 4230 | 4625 |  |  |
|                       | 70 | 1345                       | 1840 | 2180 | 2500 | 2840                   | 3165 | 3525    | 3850 | 4210 |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 560/60 R 22.5 IMP 165 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |      |      |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|------|
| EAN                   |    | 8714692342653              |      |      |      | Section width          |      | 550 mm  |      |      |      |      |
| Nominal tyre pressure |    | 5,0 bar                    |      |      |      | Overall diameter       |      | 1245 mm |      |      |      |      |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 560 mm  |      |      |      |      |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3820 mm |      |      |      |      |
| EAN Tube              |    | 8714692285044              |      |      |      | SRI                    |      | 600     |      |      |      |      |
|                       |    |                            |      |      |      | Tread depth            |      | 19 mm   |      |      |      |      |
|                       |    |                            |      |      |      | Tie bar height         |      | 7 mm    |      |      |      |      |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 251 l   |      |      |      |      |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |      |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 | 4,40 | 4,80 | 5,00 |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |      |
| Speed (km/h)          | 10 | 3425                       | 4185 | 4850 | 5565 | 6265                   | 6975 | 7615    | 8325 | 8675 | 9115 | 9270 |
|                       | 25 | 3005                       | 3670 | 4260 | 4885 | 5500                   | 6125 | 6680    | 7310 | 7615 | 8000 | 8135 |
|                       | 30 | 2870                       | 3510 | 4070 | 4665 | 5255                   | 5850 | 6385    | 6985 | 7280 | 7645 | 7775 |
|                       | 40 | 2585                       | 3160 | 3665 | 4205 | 4735                   | 5270 | 5750    | 6290 | 6555 | 6885 | 7005 |
|                       | 50 | 2300                       | 2810 | 3260 | 3740 | 4210                   | 4690 | 5120    | 5595 | 5835 | 6125 | 6230 |
|                       | 65 | 1900                       | 2325 | 2695 | 3090 | 3480                   | 3875 | 4230    | 4625 | 4820 | 5065 | 5150 |
|                       | 70 | 1730                       | 2115 | 2455 | 2810 | 3165                   | 3525 | 3850    | 4210 | 4385 | 4610 | 4685 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 580/65 R 22.5 IMP 166 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |      |         |      |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|---------|------|--|
| EAN                   |    | 8714692186622              |      |      |      |      | Section width          |      | 585 mm  |      |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |      | 1300 mm |      |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 585 mm  |      |  |
| Recommended rim width |    | AG 18.00                   |      |      |      |      | Rolling circumference  |      | 3985 mm |      |  |
| Permitted rim width   |    | AG 16.00                   |      |      |      |      | SRI                    |      | 625     |      |  |
|                       |    |                            |      |      |      |      | Tread depth            |      | 23 mm   |      |  |
|                       |    |                            |      |      |      |      | Tie bar height         |      | 6 mm    |      |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 310 l   |      |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |  |
| Speed (km/h)          | 10 | 3075                       | 4200 | 4980 | 5705 | 6480 | 7230                   | 7950 | 8785    | 9540 |  |
|                       | 25 | 2695                       | 3685 | 4370 | 5010 | 5690 | 6345                   | 6980 | 7710    | 8375 |  |
|                       | 30 | 2580                       | 3520 | 4175 | 4785 | 5435 | 6065                   | 6670 | 7370    | 8005 |  |
|                       | 40 | 2320                       | 3170 | 3760 | 4310 | 4895 | 5460                   | 6005 | 6640    | 7210 |  |
|                       | 50 | 2065                       | 2820 | 3345 | 3835 | 4355 | 4860                   | 5345 | 5905    | 6415 |  |
|                       | 65 | 1705                       | 2330 | 2765 | 3170 | 3600 | 4015                   | 4415 | 4880    | 5300 |  |
|                       | 70 | 1555                       | 2120 | 2515 | 2885 | 3275 | 3655                   | 4020 | 4440    | 4825 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 600/50 R 22.5 IMP 159 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |      |         |      |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|---------|------|--|
| EAN                   |    | 8714692335549              |      |      |      |      | Section width          |      | 600 mm  |      |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |      | 1170 mm |      |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 530 mm  |      |  |
| Recommended rim width |    | AG 20.00                   |      |      |      |      | Rolling circumference  |      | 3615 mm |      |  |
|                       |    |                            |      |      |      |      | SRI                    |      | 550     |      |  |
|                       |    |                            |      |      |      |      | Tread depth            |      | 23 mm   |      |  |
|                       |    |                            |      |      |      |      | Tie bar height         |      | 6 mm    |      |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 226 l   |      |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |  |
| Speed (km/h)          | 10 | 2515                       | 3435 | 4075 | 4675 | 5305 | 5920                   | 6570 | 7195    | 7875 |  |
|                       | 25 | 2210                       | 3015 | 3580 | 4100 | 4660 | 5195                   | 5765 | 6315    | 6915 |  |
|                       | 30 | 2110                       | 2885 | 3420 | 3920 | 4450 | 4965                   | 5510 | 6035    | 6605 |  |
|                       | 40 | 1900                       | 2595 | 3080 | 3530 | 4010 | 4475                   | 4965 | 5435    | 5950 |  |
|                       | 50 | 1690                       | 2310 | 2740 | 3140 | 3570 | 3980                   | 4415 | 4835    | 5295 |  |
|                       | 65 | 1400                       | 1910 | 2265 | 2595 | 2950 | 3290                   | 3650 | 3995    | 4375 |  |
|                       | 70 | 1270                       | 1740 | 2060 | 2360 | 2685 | 2995                   | 3320 | 3635    | 3980 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 650/40 R 22.5 IMP 150 D TL FLOTATION TRAC

|                       |               |      |                            |         |      |      |      |      |      |  |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|--|
| EAN                   | 8714692291524 |      | Section width              | 635 mm  |      |      |      |      |      |  |
| Nominal tyre pressure | 3,2 bar       |      | Overall diameter           | 1080 mm |      |      |      |      |      |  |
| Tyre construction     | Radial        |      | Static loaded radius       | 495 mm  |      |      |      |      |      |  |
| Recommended rim width | AG 20.00      |      | Rolling circumference      | 3360 mm |      |      |      |      |      |  |
|                       |               |      | SRI                        | 525     |      |      |      |      |      |  |
|                       |               |      | Tread depth                | 21 mm   |      |      |      |      |      |  |
|                       |               |      | Tie bar height             | 8 mm    |      |      |      |      |      |  |
|                       |               |      | 75% of the tyre volume     | 191 l   |      |      |      |      |      |  |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |  |
|                       |               |      | 0,80                       | 1,20    | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 |  |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |  |
| Speed (km/h)          | 10            | 2340 | 3195                       | 3790    | 4340 | 4930 | 5500 | 6030 |      |  |
|                       | 25            | 2050 | 2805                       | 3325    | 3810 | 4330 | 4830 | 5295 |      |  |
|                       | 30            | 1960 | 2680                       | 3180    | 3645 | 4135 | 4615 | 5060 |      |  |
|                       | 40            | 1765 | 2415                       | 2865    | 3280 | 3725 | 4155 | 4555 |      |  |
|                       | 50            | 1570 | 2145                       | 2545    | 2920 | 3315 | 3700 | 4055 |      |  |
|                       | 65            | 1300 | 1775                       | 2105    | 2410 | 2740 | 3055 | 3350 |      |  |
|                       | 70            | 1180 | 1615                       | 1915    | 2195 | 2495 | 2780 | 3050 |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/40 R 22.5 IMP 156 D TL FLOTATION TRAC

|                       |               |      |                            |         |      |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692291531 |      | Section width              | 635 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar       |      | Overall diameter           | 1080 mm |      |      |      |      |      |      |      |
| Tyre construction     | Radial        |      | Static loaded radius       | 495 mm  |      |      |      |      |      |      |      |
| Recommended rim width | AG 20.00      |      | Rolling circumference      | 3360 mm |      |      |      |      |      |      |      |
|                       |               |      | SRI                        | 525     |      |      |      |      |      |      |      |
|                       |               |      | Tread depth                | 21 mm   |      |      |      |      |      |      |      |
|                       |               |      | Tie bar height             | 8 mm    |      |      |      |      |      |      |      |
|                       |               |      | 75% of the tyre volume     | 191 l   |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |
|                       |               |      | 0,80                       | 1,20    | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 2340 | 3195                       | 3790    | 4340 | 4930 | 5500 | 6050 | 6685 | 7200 |      |
|                       | 25            | 2050 | 2805                       | 3325    | 3810 | 4330 | 4830 | 5310 | 5870 | 6320 |      |
|                       | 30            | 1960 | 2680                       | 3180    | 3645 | 4135 | 4615 | 5075 | 5610 | 6040 |      |
|                       | 40            | 1765 | 2415                       | 2865    | 3280 | 3725 | 4155 | 4570 | 5050 | 5440 |      |
|                       | 50            | 1570 | 2145                       | 2545    | 2920 | 3315 | 3700 | 4065 | 4495 | 4840 |      |
|                       | 65            | 1300 | 1775                       | 2105    | 2410 | 2740 | 3055 | 3360 | 3715 | 4000 |      |
|                       | 70            | 1180 | 1615                       | 1915    | 2195 | 2495 | 2780 | 3060 | 3380 | 3640 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 680/50 R 22.5 IMP 156 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |  |      |  |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|--|------|--|
| EAN                   |    | 8714692335556              |      |      |      | Section width          |      | 670 mm  |      |      |  |      |  |
| Nominal tyre pressure |    | 2,8 bar                    |      |      |      | Overall diameter       |      | 1260 mm |      |      |  |      |  |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 565 mm  |      |      |  |      |  |
| Recommended rim width |    | AG 20.00                   |      |      |      | Rolling circumference  |      | 3880 mm |      |      |  |      |  |
|                       |    |                            |      |      |      | SRI                    |      | 600     |      |      |  |      |  |
|                       |    |                            |      |      |      | Tread depth            |      | 23 mm   |      |      |  |      |  |
|                       |    |                            |      |      |      | Tie bar height         |      | 8 mm    |      |      |  |      |  |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 319 l   |      |      |  |      |  |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |  |      |  |
|                       |    | 0,80                       |      | 1,20 |      | 1,60                   |      | 2,00    |      | 2,40 |  | 2,80 |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |  |      |  |
| Speed (km/h)          | 10 | 3065                       | 4185 | 4965 | 5690 | 6565                   | 7200 | 6565    | 7200 |      |  |      |  |
|                       | 25 | 2690                       | 3675 | 4355 | 4995 | 5760                   | 6320 | 5760    | 6320 |      |  |      |  |
|                       | 30 | 2570                       | 3510 | 4165 | 4770 | 5505                   | 6040 | 5505    | 6040 |      |  |      |  |
|                       | 40 | 2315                       | 3160 | 3750 | 4300 | 4960                   | 5440 | 4960    | 5440 |      |  |      |  |
|                       | 50 | 2060                       | 2815 | 3335 | 3825 | 4415                   | 4840 | 4415    | 4840 |      |  |      |  |
|                       | 65 | 1700                       | 2325 | 2760 | 3160 | 3645                   | 4000 | 3645    | 4000 |      |  |      |  |
|                       | 70 | 1550                       | 2115 | 2510 | 2875 | 3320                   | 3640 | 3320    | 3640 |      |  |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 680/50 R 22.5 IMP 166 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |      |  |      |  |      |  |      |  |      |  |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|--|------|--|------|--|------|--|------|--|
| EAN                   |    | 8714692335563              |      |      |      | Section width          |      | 670 mm  |      |      |  |      |  |      |  |      |  |      |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1260 mm |      |      |  |      |  |      |  |      |  |      |  |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 565 mm  |      |      |  |      |  |      |  |      |  |      |  |
| Recommended rim width |    | AG 20.00                   |      |      |      | Rolling circumference  |      | 3880 mm |      |      |  |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      |      | SRI                    |      | 600     |      |      |  |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      |      | Tread depth            |      | 23 mm   |      |      |  |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      |      | Tie bar height         |      | 8 mm    |      |      |  |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 319 l   |      |      |  |      |  |      |  |      |  |      |  |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |  |      |  |      |  |      |  |      |  |
|                       |    | 0,80                       |      | 1,20 |      | 1,60                   |      | 2,00    |      | 2,40 |  | 2,80 |  | 3,20 |  | 3,60 |  | 4,00 |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |  |      |  |      |  |      |  |      |  |
| Speed (km/h)          | 10 | 3065                       | 4185 | 4965 | 5690 | 6565                   | 7200 | 7925    | 8760 | 9540 |  |      |  |      |  |      |  |      |  |
|                       | 25 | 2690                       | 3675 | 4355 | 4995 | 5760                   | 6320 | 6955    | 7690 | 8375 |  |      |  |      |  |      |  |      |  |
|                       | 30 | 2570                       | 3510 | 4165 | 4770 | 5505                   | 6040 | 6650    | 7350 | 8005 |  |      |  |      |  |      |  |      |  |
|                       | 40 | 2315                       | 3160 | 3750 | 4300 | 4960                   | 5440 | 5990    | 6620 | 7210 |  |      |  |      |  |      |  |      |  |
|                       | 50 | 2060                       | 2815 | 3335 | 3825 | 4415                   | 4840 | 5325    | 5890 | 6415 |  |      |  |      |  |      |  |      |  |
|                       | 65 | 1700                       | 2325 | 2760 | 3160 | 3645                   | 4000 | 4405    | 4865 | 5300 |  |      |  |      |  |      |  |      |  |
|                       | 70 | 1550                       | 2115 | 2510 | 2875 | 3320                   | 3640 | 4005    | 4430 | 4825 |  |      |  |      |  |      |  |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 710/40 R 22.5 IMP 161 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |      |         |      |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|---------|------|--|
| EAN                   |    | 8714692335570              |      |      |      |      | Section width          |      | 700 mm  |      |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |      | 1140 mm |      |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 515 mm  |      |  |
| Recommended rim width |    | AG 24.00                   |      |      |      |      | Rolling circumference  |      | 3470 mm |      |  |
|                       |    |                            |      |      |      |      | SRI                    |      | 550     |      |  |
|                       |    |                            |      |      |      |      | Tread depth            |      | 23 mm   |      |  |
|                       |    |                            |      |      |      |      | Tie bar height         |      | 8 mm    |      |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 253 l   |      |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |  |
| Speed (km/h)          | 10 | 2680                       | 3660 | 4345 | 4980 | 5655 | 6305                   | 6975 | 7665    | 8325 |  |
|                       | 25 | 2355                       | 3215 | 3815 | 4370 | 4965 | 5535                   | 6125 | 6730    | 7310 |  |
|                       | 30 | 2250                       | 3070 | 3645 | 4175 | 4745 | 5290                   | 5850 | 6430    | 6985 |  |
|                       | 40 | 2025                       | 2765 | 3280 | 3760 | 4270 | 4765                   | 5270 | 5790    | 6290 |  |
|                       | 50 | 1800                       | 2460 | 2920 | 3345 | 3800 | 4240                   | 4690 | 5150    | 5595 |  |
|                       | 65 | 1490                       | 2035 | 2415 | 2765 | 3140 | 3505                   | 3875 | 4260    | 4625 |  |
|                       | 70 | 1355                       | 1850 | 2195 | 2515 | 2860 | 3190                   | 3525 | 3875    | 4210 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 710/45 R 22.5 IMP 165 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |      |         |      |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|---------|------|--|
| EAN                   |    | 8714692183454              |      |      |      |      | Section width          |      | 730 mm  |      |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |      | 1230 mm |      |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 570 mm  |      |  |
| Recommended rim width |    | AG 24.00                   |      |      |      |      | Rolling circumference  |      | 3780 mm |      |  |
|                       |    |                            |      |      |      |      | SRI                    |      | 575     |      |  |
| EAN Tube              |    | 8714692335020              |      |      |      |      | Tread depth            |      | 23 mm   |      |  |
|                       |    |                            |      |      |      |      | Tie bar height         |      | 5 mm    |      |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 325 l   |      |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |         |      |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |      |  |
| Speed (km/h)          | 10 | 2980                       | 4070 | 4830 | 5535 | 6285 | 7010                   | 7705 | 8520    | 9270 |  |
|                       | 25 | 2615                       | 3570 | 4240 | 4855 | 5515 | 6150                   | 6765 | 7475    | 8135 |  |
|                       | 30 | 2500                       | 3415 | 4050 | 4640 | 5270 | 5880                   | 6465 | 7145    | 7775 |  |
|                       | 40 | 2250                       | 3075 | 3650 | 4180 | 4750 | 5295                   | 5825 | 6435    | 7005 |  |
|                       | 50 | 2005                       | 2735 | 3245 | 3720 | 4225 | 4710                   | 5180 | 5725    | 6230 |  |
|                       | 65 | 1655                       | 2260 | 2680 | 3075 | 3490 | 3895                   | 4280 | 4735    | 5150 |  |
|                       | 70 | 1505                       | 2060 | 2440 | 2795 | 3175 | 3545                   | 3895 | 4305    | 4685 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



## 800/40 R 22.5 IMP 168 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |      |         |       |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|---------|-------|--|
| EAN                   |    | 8714692335587              |      |      |      |      | Section width          |      | 790 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |      | 1220 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 550 mm  |       |  |
| Recommended rim width |    | AG 28.00                   |      |      |      |      | Rolling circumference  |      | 3700 mm |       |  |
|                       |    |                            |      |      |      |      | SRI                    |      | 575     |       |  |
|                       |    |                            |      |      |      |      | Tread depth            |      | 23 mm   |       |  |
|                       |    |                            |      |      |      |      | Tie bar height         |      | 8 mm    |       |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 348 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |       |  |
| Speed (km/h)          | 10 | 3230                       | 4415 | 5235 | 6000 | 6815 | 7600                   | 8355 | 9235    | 10080 |  |
|                       | 25 | 2835                       | 3875 | 4595 | 5265 | 5980 | 6670                   | 7335 | 8110    | 8850  |  |
|                       | 30 | 2710                       | 3700 | 4390 | 5035 | 5715 | 6375                   | 7010 | 7750    | 8455  |  |
|                       | 40 | 2440                       | 3335 | 3955 | 4535 | 5150 | 5740                   | 6315 | 6980    | 7615  |  |
|                       | 50 | 2170                       | 2965 | 3520 | 4035 | 4580 | 5110                   | 5620 | 6210    | 6775  |  |
|                       | 65 | 1795                       | 2450 | 2910 | 3335 | 3785 | 4220                   | 4645 | 5130    | 5600  |  |
|                       | 70 | 1635                       | 2230 | 2645 | 3035 | 3445 | 3840                   | 4225 | 4670    | 5095  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 710/65 R 26 IMP 179 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |       |                        |       |         |       |  |
|-----------------------|----|----------------------------|------|------|------|-------|------------------------|-------|---------|-------|--|
| EAN                   |    | 8714692335594              |      |      |      |       | Section width          |       | 735 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |       | Overall diameter       |       | 1565 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |      |       | Static loaded radius   |       | 715 mm  |       |  |
| Recommended rim width |    | DW 25B                     |      |      |      |       | Rolling circumference  |       | 4855 mm |       |  |
| Alternative tyre size |    | 28 LR 26                   |      |      |      |       | SRI                    |       | 750     |       |  |
|                       |    |                            |      |      |      |       | Tread depth            |       | 26 mm   |       |  |
|                       |    |                            |      |      |      |       | Tie bar height         |       | 9 mm    |       |  |
|                       |    |                            |      |      |      |       | 75% of the tyre volume |       | 563 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |      |       |                        |       |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40  | 2,80                   | 3,20  | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |       |                        |       |         |       |  |
| Speed (km/h)          | 10 | 4580                       | 6240 | 7630 | 9015 | 10285 | 11185                  | 12085 | 12985   | 13950 |  |
|                       | 25 | 4020                       | 5480 | 6695 | 7915 | 9030  | 9815                   | 10610 | 11395   | 12245 |  |
|                       | 30 | 3840                       | 5235 | 6400 | 7565 | 8630  | 9385                   | 10140 | 10890   | 11705 |  |
|                       | 40 | 3460                       | 4715 | 5765 | 6815 | 7770  | 8450                   | 9130  | 9810    | 10540 |  |
|                       | 50 | 3075                       | 4195 | 5130 | 6060 | 6915  | 7520                   | 8125  | 8730    | 9380  |  |
|                       | 65 | 2545                       | 3470 | 4240 | 5010 | 5715  | 6215                   | 6715  | 7215    | 7750  |  |
|                       | 70 | 2315                       | 3155 | 3855 | 4560 | 5200  | 5655                   | 6110  | 6565    | 7055  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 600/55 R 26.5 IMP 165 D TL FLOTATION TRAC

|                       |               |                            |         |      |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692309885 | Section width              | 620 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar       | Overall diameter           | 1350 mm |      |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 625 mm  |      |      |      |      |      |      |      |
| Recommended rim width | AG 20.00      | Rolling circumference      | 4170 mm |      |      |      |      |      |      |      |
|                       |               | SRI                        | 625     |      |      |      |      |      |      |      |
|                       |               | Tread depth                | 25 mm   |      |      |      |      |      |      |      |
|                       |               | Tie bar height             | 9 mm    |      |      |      |      |      |      |      |
|                       |               | 75% of the tyre volume     | 307 l   |      |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |
|                       |               | 0,80                       | 1,20    | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 3060                       | 4635    | 5560 | 6490 | 7415 | 7890 | 8345 | 8805 | 9270 |
|                       | 25            | 2685                       | 4070    | 4880 | 5695 | 6510 | 6915 | 7320 | 7730 | 8135 |
|                       | 30            | 2565                       | 3890    | 4665 | 5445 | 6220 | 6610 | 7000 | 7385 | 7775 |
|                       | 40            | 2310                       | 3505    | 4205 | 4905 | 5605 | 5955 | 6305 | 6655 | 7005 |
|                       | 50            | 2055                       | 3115    | 3740 | 4360 | 4985 | 5295 | 5605 | 5920 | 6230 |
|                       | 65            | 1700                       | 2575    | 3090 | 3605 | 4120 | 4380 | 4635 | 4895 | 5150 |
|                       | 70            | 1545                       | 2345    | 2810 | 3280 | 3750 | 3980 | 4215 | 4450 | 4685 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/55 R 26.5 IMP 169 D TL FLOTATION TRAC

|                       |               |                            |         |      |      |      |      |      |      |       |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|-------|
| EAN                   | 8714692186691 | Section width              | 650 mm  |      |      |      |      |      |      |       |
| Nominal tyre pressure | 4,0 bar       | Overall diameter           | 1400 mm |      |      |      |      |      |      |       |
| Tyre construction     | Radial        | Static loaded radius       | 635 mm  |      |      |      |      |      |      |       |
| Recommended rim width | AG 20.00      | Rolling circumference      | 4300 mm |      |      |      |      |      |      |       |
|                       |               | SRI                        | 650     |      |      |      |      |      |      |       |
|                       |               | Tread depth                | 26 mm   |      |      |      |      |      |      |       |
|                       |               | Tie bar height             | 8 mm    |      |      |      |      |      |      |       |
|                       |               | 75% of the tyre volume     | 368 l   |      |      |      |      |      |      |       |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |       |
|                       |               | 0,80                       | 1,20    | 1,60 | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00  |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |       |
| Speed (km/h)          | 10            | 3375                       | 4610    | 5470 | 6270 | 7120 | 7945 | 8735 | 9655 | 10440 |
|                       | 25            | 2965                       | 4050    | 4800 | 5505 | 6250 | 6970 | 7665 | 8475 | 9165  |
|                       | 30            | 2830                       | 3870    | 4590 | 5260 | 5975 | 6665 | 7325 | 8100 | 8760  |
|                       | 40            | 2550                       | 3485    | 4135 | 4735 | 5380 | 6000 | 6600 | 7295 | 7890  |
|                       | 50            | 2270                       | 3100    | 3680 | 4215 | 4785 | 5340 | 5870 | 6490 | 7020  |
|                       | 65            | 1875                       | 2560    | 3040 | 3485 | 3955 | 4415 | 4850 | 5365 | 5800  |
|                       | 70            | 1705                       | 2330    | 2765 | 3170 | 3600 | 4015 | 4415 | 4880 | 5280  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/65 R 26.5 IMP 174 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |       |         |       |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|-------|---------|-------|--|
| EAN                   |    | 8714692309892              |      |      |      |      | Section width          |       | 660 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |       | 1520 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |       | 700 mm  |       |  |
| Recommended rim width |    | AG 20.00                   |      |      |      |      | Rolling circumference  |       | 4680 mm |       |  |
|                       |    |                            |      |      |      |      | SRI                    |       | 725     |       |  |
|                       |    |                            |      |      |      |      | Tread depth            |       | 26 mm   |       |  |
|                       |    |                            |      |      |      |      | Tie bar height         |       | 9 mm    |       |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |       | 464 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |       |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20  | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |       |         |       |  |
| Speed (km/h)          | 10 | 3980                       | 6030 | 7235 | 8440 | 9650 | 10250                  | 10855 | 11455   | 12060 |  |
|                       | 25 | 3495                       | 5292 | 6350 | 7410 | 8470 | 8995                   | 9525  | 10055   | 10585 |  |
|                       | 30 | 3340                       | 5060 | 6070 | 7080 | 8090 | 8600                   | 9105  | 9610    | 10115 |  |
|                       | 40 | 3005                       | 4555 | 5465 | 6375 | 7290 | 7745                   | 8200  | 8655    | 9110  |  |
|                       | 50 | 2675                       | 4055 | 4865 | 5675 | 6485 | 6890                   | 7295  | 7700    | 8105  |  |
|                       | 65 | 2210                       | 3350 | 4020 | 4690 | 5360 | 5695                   | 6030  | 6365    | 6700  |  |
|                       | 70 | 2010                       | 3050 | 3655 | 4265 | 4875 | 5180                   | 5485  | 5790    | 6095  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 710/50 R 26.5 IMP 170 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |      |         |       |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|---------|-------|--|
| EAN                   |    | 8714692309915              |      |      |      |      | Section width          |      | 725 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |      | 1380 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 635 mm  |       |  |
| Recommended rim width |    | AG 24.00                   |      |      |      |      | Rolling circumference  |      | 4265 mm |       |  |
|                       |    |                            |      |      |      |      | SRI                    |      | 650     |       |  |
|                       |    |                            |      |      |      |      | Tread depth            |      | 25 mm   |       |  |
|                       |    |                            |      |      |      |      | Tie bar height         |      | 9 mm    |       |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 392 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |       |  |
| Speed (km/h)          | 10 | 3565                       | 5400 | 6480 | 7560 | 8640 | 9180                   | 9720 | 10260   | 10800 |  |
|                       | 25 | 3130                       | 4740 | 5690 | 6635 | 7585 | 8060                   | 8530 | 9005    | 9480  |  |
|                       | 30 | 2990                       | 4530 | 5435 | 6340 | 7250 | 7700                   | 8155 | 8605    | 9060  |  |
|                       | 40 | 2695                       | 4080 | 4895 | 5710 | 6530 | 6935                   | 7345 | 7750    | 8160  |  |
|                       | 50 | 2395                       | 3630 | 4355 | 5080 | 5810 | 6170                   | 6535 | 6895    | 7260  |  |
|                       | 65 | 1980                       | 3000 | 3600 | 4200 | 4800 | 5100                   | 5400 | 5700    | 6000  |  |
|                       | 70 | 1800                       | 2730 | 3275 | 3820 | 4370 | 4640                   | 4915 | 5185    | 5460  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 750/45 R 26.5 IMP 170 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |      |       |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|-------|
| EAN                   |    | 8714692186721              |      |      |      | Section width          |      | 740 mm  |      |       |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1365 mm |      |       |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 620 mm  |      |       |
| Recommended rim width |    | AG 24.00                   |      |      |      | Rolling circumference  |      | 4180 mm |      |       |
|                       |    |                            |      |      |      | SRI                    |      | 650     |      |       |
|                       |    |                            |      |      |      | Tread depth            |      | 26 mm   |      |       |
|                       |    |                            |      |      |      | Tie bar height         |      | 7 mm    |      |       |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 397 l   |      |       |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |       |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    | 3,60 | 4,00  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |       |
| Speed (km/h)          | 10 | 3485                       | 4760 | 5650 | 6475 | 7355                   | 8200 | 9020    | 9965 | 10800 |
|                       | 25 | 3060                       | 4180 | 4960 | 5680 | 6455                   | 7200 | 7915    | 8750 | 9480  |
|                       | 30 | 2925                       | 3995 | 4740 | 5430 | 6170                   | 6880 | 7565    | 8360 | 9060  |
|                       | 40 | 2635                       | 3600 | 4270 | 4890 | 5555                   | 6195 | 6815    | 7530 | 8160  |
|                       | 50 | 2345                       | 3200 | 3795 | 4350 | 4945                   | 5515 | 6060    | 6700 | 7260  |
|                       | 65 | 1935                       | 2645 | 3140 | 3595 | 4085                   | 4555 | 5010    | 5535 | 6000  |
|                       | 70 | 1760                       | 2405 | 2855 | 3275 | 3715                   | 4145 | 4560    | 5040 | 5460  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/45 R 26.5 IMP 174 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |                        |      |         |       |       |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|-------|-------|
| EAN                   |    | 8714692309908              |      |      |      | Section width          |      | 800 mm  |       |       |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1380 mm |       |       |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 640 mm  |       |       |
| Recommended rim width |    | AG 28.00                   |      |      |      | Rolling circumference  |      | 4300 mm |       |       |
|                       |    |                            |      |      |      | SRI                    |      | 675     |       |       |
|                       |    |                            |      |      |      | Tread depth            |      | 25 mm   |       |       |
|                       |    |                            |      |      |      | Tie bar height         |      | 9 mm    |       |       |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 430 l   |       |       |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |       |       |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    | 3,60  | 4,00  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |       |       |
| Speed (km/h)          | 10 | 3980                       | 5425 | 6635 | 7840 | 8925                   | 9710 | 10490   | 11275 | 12060 |
|                       | 25 | 3495                       | 4765 | 5820 | 6880 | 7835                   | 8520 | 9210    | 9895  | 10585 |
|                       | 30 | 3340                       | 4550 | 5565 | 6575 | 7485                   | 8145 | 8800    | 9460  | 10115 |
|                       | 40 | 3005                       | 4100 | 5010 | 5920 | 6740                   | 7335 | 7925    | 8520  | 9110  |
|                       | 50 | 2675                       | 3645 | 4460 | 5270 | 6000                   | 6525 | 7050    | 7580  | 8105  |
|                       | 65 | 2210                       | 3015 | 3685 | 4355 | 4960                   | 5395 | 5830    | 6265  | 6700  |
|                       | 70 | 2010                       | 2745 | 3350 | 3960 | 4510                   | 4905 | 5305    | 5700  | 6095  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 600/60 R 30.5 IMP 169 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |      |         |       |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|------|---------|-------|--|
| EAN                   |    | 8714692244568              |      |      |      |      | Section width          |      | 610 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |      | 1505 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |      | 710 mm  |       |  |
| Recommended rim width |    | AG 20.00                   |      |      |      |      | Rolling circumference  |      | 4675 mm |       |  |
|                       |    |                            |      |      |      |      | SRI                    |      | 725     |       |  |
|                       |    |                            |      |      |      |      | Tread depth            |      | 26 mm   |       |  |
|                       |    |                            |      |      |      |      | Tie bar height         |      | 9 mm    |       |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |      | 371 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |      |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |      |         |       |  |
| Speed (km/h)          | 10 | 3525                       | 5310 | 6405 | 7470 | 8530 | 9075                   | 9540 | 10165   | 10440 |  |
|                       | 25 | 3095                       | 4660 | 5620 | 6560 | 7490 | 7965                   | 8375 | 8920    | 9165  |  |
|                       | 30 | 2955                       | 4455 | 5375 | 6270 | 7155 | 7615                   | 8005 | 8525    | 8760  |  |
|                       | 40 | 2665                       | 4010 | 4840 | 5645 | 6445 | 6855                   | 7210 | 7680    | 7890  |  |
|                       | 50 | 2370                       | 3570 | 4305 | 5020 | 5735 | 6100                   | 6415 | 6830    | 7020  |  |
|                       | 65 | 1960                       | 2950 | 3560 | 4150 | 4740 | 5040                   | 5300 | 5645    | 5800  |  |
|                       | 70 | 1780                       | 2685 | 3240 | 3775 | 4310 | 4590                   | 4825 | 5140    | 5280  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/65 R 30.5 IMP 176 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |       |                        |       |         |       |  |
|-----------------------|----|----------------------------|------|------|------|-------|------------------------|-------|---------|-------|--|
| EAN                   |    | 8714692244582              |      |      |      |       | Section width          |       | 645 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |       | Overall diameter       |       | 1635 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |      |       | Static loaded radius   |       | 755 mm  |       |  |
| Recommended rim width |    | AG 20.00                   |      |      |      |       | Rolling circumference  |       | 5075 mm |       |  |
|                       |    |                            |      |      |      |       | SRI                    |       | 775     |       |  |
|                       |    |                            |      |      |      |       | Tread depth            |       | 26 mm   |       |  |
|                       |    |                            |      |      |      |       | Tie bar height         |       | 9 mm    |       |  |
|                       |    |                            |      |      |      |       | 75% of the tyre volume |       | 502 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |      |       |                        |       |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40  | 2,80                   | 3,20  | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |       |                        |       |         |       |  |
| Speed (km/h)          | 10 | 4290                       | 6455 | 7790 | 9085 | 10375 | 11040                  | 11700 | 12360   | 12780 |  |
|                       | 25 | 3765                       | 5670 | 6840 | 7975 | 9105  | 9690                   | 10270 | 10850   | 11220 |  |
|                       | 30 | 3595                       | 5415 | 6535 | 7625 | 8705  | 9260                   | 9815  | 10370   | 10720 |  |
|                       | 40 | 3240                       | 4880 | 5885 | 6865 | 7840  | 8340                   | 8840  | 9340    | 9655  |  |
|                       | 50 | 2885                       | 4340 | 5235 | 6110 | 6975  | 7420                   | 7865  | 8310    | 8590  |  |
|                       | 65 | 2380                       | 3585 | 4330 | 5050 | 5765  | 6135                   | 6500  | 6870    | 7100  |  |
|                       | 70 | 2170                       | 3265 | 3940 | 4595 | 5245  | 5580                   | 5915  | 6250    | 6460  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 710/50 R 30.5 IMP 173 D TL FLOTATION TRAC

|                       |    |                            |      |                        |      |         |       |       |       |       |
|-----------------------|----|----------------------------|------|------------------------|------|---------|-------|-------|-------|-------|
| EAN                   |    | 8714692175435              |      | Section width          |      | 730 mm  |       |       |       |       |
| Nominal tyre pressure |    | 4,0 bar                    |      | Overall diameter       |      | 1495 mm |       |       |       |       |
| Tyre construction     |    | Radial                     |      | Static loaded radius   |      | 680 mm  |       |       |       |       |
| Recommended rim width |    | AG 24.00                   |      | Rolling circumference  |      | 4530 mm |       |       |       |       |
|                       |    |                            |      | SRI                    |      | 700     |       |       |       |       |
|                       |    |                            |      | Tread depth            |      | 28 mm   |       |       |       |       |
|                       |    |                            |      | Tie bar height         |      | 9 mm    |       |       |       |       |
|                       |    |                            |      | 75% of the tyre volume |      | 430 l   |       |       |       |       |
|                       |    | Tyre pressure (bar)        |      |                        |      |         |       |       |       |       |
|                       |    | 0,80                       | 1,20 | 1,60                   | 2,00 | 2,40    | 2,80  | 3,20  | 3,60  | 4,00  |
|                       |    | Load capacity per tyre(kg) |      |                        |      |         |       |       |       |       |
| Speed (km/h)          | 10 | 3895                       | 5865 | 7080                   | 8255 | 9425    | 10030 | 10800 | 11230 | 11700 |
|                       | 25 | 3420                       | 5150 | 6215                   | 7250 | 8275    | 8805  | 9480  | 9860  | 10270 |
|                       | 30 | 3270                       | 4920 | 5940                   | 6925 | 7910    | 8415  | 9060  | 9420  | 9815  |
|                       | 40 | 2945                       | 4435 | 5350                   | 6240 | 7120    | 7580  | 8160  | 8485  | 8840  |
|                       | 50 | 2620                       | 3945 | 4760                   | 5550 | 6335    | 6740  | 7260  | 7550  | 7865  |
|                       | 65 | 2165                       | 3260 | 3930                   | 4585 | 5235    | 5570  | 6000  | 6240  | 6500  |
|                       | 70 | 1970                       | 2965 | 3580                   | 4175 | 4765    | 5070  | 5460  | 5680  | 5915  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 750/60 R 30.5 IMP 181 D TL FLOTATION TRAC

|                       |    |                            |      |                        |       |         |       |       |       |       |
|-----------------------|----|----------------------------|------|------------------------|-------|---------|-------|-------|-------|-------|
| EAN                   |    | 8714692174926              |      | Section width          |       | 785 mm  |       |       |       |       |
| Nominal tyre pressure |    | 4,0 bar                    |      | Overall diameter       |       | 1675 mm |       |       |       |       |
| Tyre construction     |    | Radial                     |      | Static loaded radius   |       | 775 mm  |       |       |       |       |
| Recommended rim width |    | AG 24.00                   |      | Rolling circumference  |       | 5075 mm |       |       |       |       |
|                       |    |                            |      | SRI                    |       | 800     |       |       |       |       |
|                       |    |                            |      | Tread depth            |       | 28 mm   |       |       |       |       |
|                       |    |                            |      | Tie bar height         |       | 9 mm    |       |       |       |       |
|                       |    |                            |      | 75% of the tyre volume |       | 654 l   |       |       |       |       |
|                       |    | Tyre pressure (bar)        |      |                        |       |         |       |       |       |       |
|                       |    | 0,80                       | 1,20 | 1,60                   | 2,00  | 2,40    | 2,80  | 3,20  | 3,60  | 4,00  |
|                       |    | Load capacity per tyre(kg) |      |                        |       |         |       |       |       |       |
| Speed (km/h)          | 10 | 4995                       | 7520 | 9075                   | 10585 | 12085   | 12860 | 13500 | 14400 | 14850 |
|                       | 25 | 4385                       | 6600 | 7965                   | 9290  | 10610   | 11285 | 11850 | 12640 | 13035 |
|                       | 30 | 4190                       | 6310 | 7615                   | 8880  | 10140   | 10785 | 11325 | 12080 | 12460 |
|                       | 40 | 3775                       | 5685 | 6855                   | 8000  | 9130    | 9715  | 10200 | 10880 | 11220 |
|                       | 50 | 3360                       | 5055 | 6100                   | 7115  | 8125    | 8645  | 9075  | 9680  | 9985  |
|                       | 65 | 2775                       | 4180 | 5040                   | 5880  | 6715    | 7145  | 7500  | 8000  | 8250  |
|                       | 70 | 2525                       | 3800 | 4590                   | 5350  | 6110    | 6500  | 6825  | 7280  | 7510  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/45 R 30.5 IMP 176 D TL FLOTATION TRAC

|                       |    |                            |      |      |      |      |                        |       |         |       |  |
|-----------------------|----|----------------------------|------|------|------|------|------------------------|-------|---------|-------|--|
| EAN                   |    | 8714692244605              |      |      |      |      | Section width          |       | 810 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      |      | Overall diameter       |       | 1510 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |      |      | Static loaded radius   |       | 700 mm  |       |  |
| Recommended rim width |    | AG 28.00                   |      |      |      |      | Rolling circumference  |       | 4710 mm |       |  |
|                       |    |                            |      |      |      |      | SRI                    |       | 725     |       |  |
|                       |    |                            |      |      |      |      | Tread depth            |       | 26 mm   |       |  |
|                       |    |                            |      |      |      |      | Tie bar height         |       | 9 mm    |       |  |
|                       |    |                            |      |      |      |      | 75% of the tyre volume |       | 498 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                        |       |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20  | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                        |       |         |       |  |
| Speed (km/h)          | 10 | 4230                       | 5770 | 7055 | 8335 | 9510 | 10340                  | 11175 | 12005   | 12780 |  |
|                       | 25 | 3715                       | 5065 | 6190 | 7315 | 8345 | 9075                   | 9810  | 10535   | 11220 |  |
|                       | 30 | 3550                       | 4840 | 5915 | 6995 | 7975 | 8675                   | 9375  | 10070   | 10720 |  |
|                       | 40 | 3200                       | 4360 | 5330 | 6300 | 7185 | 7815                   | 8445  | 9070    | 9655  |  |
|                       | 50 | 2845                       | 3880 | 4740 | 5605 | 6390 | 6950                   | 7510  | 8070    | 8590  |  |
|                       | 65 | 2350                       | 3205 | 3920 | 4630 | 5285 | 5745                   | 6210  | 6670    | 7100  |  |
|                       | 70 | 2140                       | 2920 | 3565 | 4215 | 4805 | 5230                   | 5650  | 6070    | 6460  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 850/50 R 30.5 IMP 182 D TL FLOTATION TRAC

|                       |    |                            |      |      |       |       |                        |       |         |       |  |
|-----------------------|----|----------------------------|------|------|-------|-------|------------------------|-------|---------|-------|--|
| EAN                   |    | 8714692174940              |      |      |       |       | Section width          |       | 870 mm  |       |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |       |       | Overall diameter       |       | 1655 mm |       |  |
| Tyre construction     |    | Radial                     |      |      |       |       | Static loaded radius   |       | 725 mm  |       |  |
| Recommended rim width |    | AG 28.00                   |      |      |       |       | Rolling circumference  |       | 4910 mm |       |  |
|                       |    |                            |      |      |       |       | SRI                    |       | 775     |       |  |
|                       |    |                            |      |      |       |       | Tread depth            |       | 28 mm   |       |  |
|                       |    |                            |      |      |       |       | Tie bar height         |       | 9 mm    |       |  |
|                       |    |                            |      |      |       |       | 75% of the tyre volume |       | 676 l   |       |  |
|                       |    | Tyre pressure (bar)        |      |      |       |       |                        |       |         |       |  |
|                       |    | 0,80                       | 1,20 | 1,60 | 2,00  | 2,40  | 2,80                   | 3,20  | 3,60    | 4,00  |  |
|                       |    | Load capacity per tyre(kg) |      |      |       |       |                        |       |         |       |  |
| Speed (km/h)          | 10 | 5155                       | 7765 | 9365 | 10925 | 12475 | 13270                  | 14075 | 14860   | 15300 |  |
|                       | 25 | 4525                       | 6815 | 8220 | 9590  | 10950 | 11650                  | 12355 | 13045   | 13430 |  |
|                       | 30 | 4325                       | 6510 | 7855 | 9165  | 10465 | 11135                  | 11810 | 12465   | 12835 |  |
|                       | 40 | 3895                       | 5865 | 7075 | 8255  | 9425  | 10025                  | 10635 | 11230   | 11560 |  |
|                       | 50 | 3465                       | 5220 | 6295 | 7345  | 8385  | 8920                   | 9465  | 9990    | 10285 |  |
|                       | 65 | 2865                       | 4315 | 5205 | 6070  | 6930  | 7375                   | 7820  | 8255    | 8500  |  |
|                       | 70 | 2605                       | 3925 | 4735 | 5525  | 6305  | 6710                   | 7115  | 7515    | 7735  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 800/60 R 32 IMP 185 D TL FLOTATION TRAC

|                       |               |                            |         |      |       |       |       |       |       |       |
|-----------------------|---------------|----------------------------|---------|------|-------|-------|-------|-------|-------|-------|
| EAN                   | 8714692291548 | Section width              | 810 mm  |      |       |       |       |       |       |       |
| Nominal tyre pressure | 4,0 bar       | Overall diameter           | 1795 mm |      |       |       |       |       |       |       |
| Tyre construction     | Radial        | Static loaded radius       | 810 mm  |      |       |       |       |       |       |       |
| Recommended rim width | DW 27B        | Rolling circumference      | 5550 mm |      |       |       |       |       |       |       |
|                       |               | SRI                        | 825     |      |       |       |       |       |       |       |
|                       |               | Tread depth                | 28 mm   |      |       |       |       |       |       |       |
|                       |               | Tie bar height             | 9 mm    |      |       |       |       |       |       |       |
|                       |               | 75% of the tyre volume     | 777 l   |      |       |       |       |       |       |       |
|                       |               | Tyre pressure (bar)        |         |      |       |       |       |       |       |       |
|                       |               | 0,80                       | 1,20    | 1,60 | 2,00  | 2,40  | 2,80  | 3,20  | 3,60  | 4,00  |
|                       |               | Load capacity per tyre(kg) |         |      |       |       |       |       |       |       |
| Speed (km/h)          | 10            | 5620                       | 8060    | 9785 | 11490 | 13110 | 14095 | 15090 | 16065 | 16650 |
|                       | 25            | 4930                       | 7075    | 8590 | 10085 | 11510 | 12375 | 13245 | 14105 | 14615 |
|                       | 30            | 4715                       | 6765    | 8210 | 9635  | 11000 | 11825 | 12660 | 13480 | 13970 |
|                       | 40            | 4245                       | 6090    | 7395 | 8680  | 9905  | 10650 | 11400 | 12140 | 12580 |
|                       | 50            | 3775                       | 5420    | 6580 | 7725  | 8815  | 9475  | 10145 | 10800 | 11195 |
|                       | 65            | 3120                       | 4480    | 5435 | 6380  | 7285  | 7830  | 8385  | 8925  | 9250  |
|                       | 70            | 2840                       | 4075    | 4950 | 5810  | 6630  | 7125  | 7630  | 8125  | 8420  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 900/65 R 32 IMP 188 D TL FLOTATION TRAC

|                           |               |                                 |         |       |       |       |       |       |  |
|---------------------------|---------------|---------------------------------|---------|-------|-------|-------|-------|-------|--|
| EAN                       | 8714692360879 | Section width                   | 915 mm  |       |       |       |       |       |  |
| Nominal tyre pressure     | 3,2 bar       | Overall diameter                | 1955 mm |       |       |       |       |       |  |
| Tyre construction         | Radial        | Static loaded radius            | 875 mm  |       |       |       |       |       |  |
| Recommended rim width     | DW 30B        | Rolling circumference           | 5965 mm |       |       |       |       |       |  |
| Permitted rim width       | DH31, DW31    | SRI                             | 925     |       |       |       |       |       |  |
| Alternative tyre size (s) | 35.5 LR 32    | Tread depth (including tie bar) | 31 mm   |       |       |       |       |       |  |
|                           |               | 75% of the tyre volume          | 1078 l  |       |       |       |       |       |  |
|                           |               | Tyre pressure (bar)             |         |       |       |       |       |       |  |
|                           |               | 0,80                            | 1,20    | 1,60  | 2,00  | 2,40  | 2,80  | 3,20  |  |
|                           |               | Load capacity per tyre(kg)      |         |       |       |       |       |       |  |
| Speed (km/h)              | 10            | 7050                            | 9630    | 11425 | 13095 | 14875 | 16590 | 18000 |  |
|                           | 25            | 6190                            | 8455    | 10030 | 11495 | 13055 | 14560 | 15800 |  |
|                           | 30            | 5915                            | 8080    | 9585  | 10985 | 12475 | 13915 | 15100 |  |
|                           | 40            | 5325                            | 7280    | 8635  | 9895  | 11235 | 12535 | 13600 |  |
|                           | 50            | 4740                            | 6475    | 7680  | 8805  | 10000 | 11150 | 12100 |  |
|                           | 65            | 3915                            | 5350    | 6350  | 7275  | 8265  | 9215  | 10000 |  |
|                           | 70            | 3565                            | 4870    | 5775  | 6620  | 7520  | 8385  | 9100  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# IMPLEMENT — RADIAL

## 900/65 R 38 IMP 191 D TL FLOTATION TRAC

|                           |               |                                 |         |       |       |       |       |       |
|---------------------------|---------------|---------------------------------|---------|-------|-------|-------|-------|-------|
| EAN                       | 8714692360893 | Section width                   | 905 mm  |       |       |       |       |       |
| Nominal tyre pressure     | 3,2 bar       | Overall diameter                | 2110 mm |       |       |       |       |       |
| Tyre construction         | Radial        | Static loaded radius            | 940 mm  |       |       |       |       |       |
| Recommended rim width     | DW 30B        | Rolling circumference           | 6400 mm |       |       |       |       |       |
| Permitted rim width       | DH31, DW31    | SRI                             | 1025    |       |       |       |       |       |
| Alternative tyre size (s) | 35.5 LR 38    | Tread depth (including tie bar) | 31 mm   |       |       |       |       |       |
|                           |               | 75% of the tyre volume          | 1189 l  |       |       |       |       |       |
|                           |               | Tyre pressure (bar)             |         |       |       |       |       |       |
|                           |               | 0,80                            | 1,20    |       |       |       |       |       |
|                           |               | 1,60                            | 2,00    |       |       |       |       |       |
|                           |               | 2,40                            | 2,80    |       |       |       |       |       |
|                           |               | 3,20                            |         |       |       |       |       |       |
|                           |               | Load capacity per tyre(kg)      |         |       |       |       |       |       |
| Speed (km/h)              | 10            | 7555                            | 10320   | 12245 | 14030 | 15935 | 17775 | 19620 |
|                           | 25            | 6630                            | 9060    | 10745 | 12315 | 13990 | 15600 | 17220 |
|                           | 30            | 6340                            | 8660    | 10270 | 11770 | 13370 | 14910 | 16460 |
|                           | 40            | 5710                            | 7795    | 9250  | 10600 | 12040 | 13430 | 14825 |
|                           | 50            | 5080                            | 6935    | 8230  | 9430  | 10710 | 11950 | 13190 |
|                           | 65            | 4195                            | 5735    | 6800  | 7795  | 8855  | 9875  | 10900 |
|                           | 70            | 3820                            | 5215    | 6190  | 7095  | 8055  | 8985  | 9920  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# IMPLEMENT RADIAL —



## **FLOTATION** PRO

MEETS THE HIGH DEMANDS  
OF PROFESSIONALS

### FEATURES






- High rubber content in profile
- Flexible and strong carcass
- Flat contour & rounded shoulders

### BENEFITS

- Minimal rutting, long lifespan
- Good flotation properties, high comfort level
- No damage to vulnerable crops



# FLOTATION PRO

| Ø    | Tyre size         | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|------|-------------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 22.5 | 560/45 R 22.5 IMP | 146 D               | 3,2                              | AG 16.00  | 545  | 1085   | 490  | 3295   | 172  |
|      | 560/45 R 22.5 IMP | 152 D               | 4,0                              | AG 16.00  | 545  | 1085   | 490  | 3295   | 172  |
|      | 560/60 R 22.5 IMP | 161 D               | 4,0                              | AG 16.00  | 565  | 1250   | 560  | 3850   | 173  |
|      | 560/60 R 22.5 IMP | 165 D               | 5,0                              | AG 16.00  | 565  | 1250   | 560  | 3850   | 173  |
|      | 620/40 R 22.5 IMP | 148 D               | 3,2                              | AG 20.00  | 610  | 1080   | 495  | 3330   | 174  |
|      | 620/40 R 22.5 IMP | 154 D               | 4,0                              | AG 20.00  | 610  | 1080   | 495  | 3330   | 174  |
|      | 620/50 R 22.5 IMP | 154 D               | 3,2                              | AG 20.00  | 610  | 1185   | 540  | 3640   | 175  |
|      | 620/50 R 22.5 IMP | 161 D               | 4,0                              | AG 20.00  | 610  | 1185   | 540  | 3640   | 175  |
|      | 650/50 R 22.5 IMP | 157 D               | 3,2                              | AG 20.00  | 645  | 1250   | 560  | 3850   | 176  |
|      | 650/50 R 22.5 IMP | 163 D               | 4,0                              | AG 20.00  | 645  | 1250   | 560  | 3850   | 176  |
|      | 710/40 R 22.5 IMP | 161 D               | 4,0                              | AG 24.00  | 705  | 1140   | 520  | 3520   | 177  |
| 26.5 | 620/55 R 26.5 IMP | 166 D               | 4,0                              | AG 20.00  | 625  | 1360   | 620  | 4200   | 177  |
|      | 710/50 R 26.5 IMP | 170 D               | 4,0                              | AG 24.00  | 710  | 1360   | 620  | 4200   | 178  |
|      | 800/45 R 26.5 IMP | 174 D               | 4,0                              | AG 28.00  | 800  | 1370   | 625  | 4200   | 178  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# IMPLEMENT RADIAL —

## 560/45 R 22.5 IMP 146 D TL FLOTATION PRO

|                       |               |                            |         |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|
| EAN                   | 8714692080845 | Section width              | 545 mm  |      |      |      |      |
| Nominal tyre pressure | 3,2 bar       | Overall diameter           | 1085 mm |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 490 mm  |      |      |      |      |
| Recommended rim width | AG 16.00      | Rolling circumference      | 3295 mm |      |      |      |      |
|                       |               | SRI                        | 525     |      |      |      |      |
|                       |               | Tread depth                | 17 mm   |      |      |      |      |
|                       |               | 75% of the tyre volume     | 170 l   |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |
|                       |               | 1,20                       | 1,60    | 2,00 | 2,40 | 2,80 | 3,20 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |
| Speed (km/h)          | 10            | 2650                       | 3235    | 3755 | 4305 | 4845 | 5400 |
|                       | 25            | 2325                       | 2840    | 3295 | 3780 | 4255 | 4740 |
|                       | 30            | 2220                       | 2715    | 3150 | 3610 | 4065 | 4530 |
|                       | 40            | 2000                       | 2445    | 2835 | 3250 | 3660 | 4080 |
|                       | 50            | 1780                       | 2175    | 2525 | 2895 | 3260 | 3630 |
|                       | 65            | 1470                       | 1800    | 2085 | 2390 | 2695 | 3000 |
|                       | 70            | 1340                       | 1635    | 1900 | 2175 | 2450 | 2730 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 560/45 R 22.5 IMP 152 D TL FLOTATION PRO

|                       |               |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692080869 | Section width              | 545 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar       | Overall diameter           | 1085 mm |      |      |      |      |      |      |
| Tyre construction     | Radial        | Static loaded radius       | 490 mm  |      |      |      |      |      |      |
| Recommended rim width | AG 16.00      | Rolling circumference      | 3295 mm |      |      |      |      |      |      |
|                       |               | SRI                        | 525     |      |      |      |      |      |      |
|                       |               | Tread depth                | 17 mm   |      |      |      |      |      |      |
|                       |               | 75% of the tyre volume     | 170 l   |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               | 1,20                       | 1,60    | 2,00 | 2,40 | 2,80 | 3,20 | 3,60 | 4,00 |
|                       |               | Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 2650                       | 3235    | 3755 | 4305 | 4845 | 5400 | 5890 | 6390 |
|                       | 25            | 2325                       | 2840    | 3295 | 3780 | 4255 | 4740 | 5170 | 5610 |
|                       | 30            | 2220                       | 2715    | 3150 | 3610 | 4065 | 4530 | 4940 | 5360 |
|                       | 40            | 2000                       | 2445    | 2835 | 3250 | 3660 | 4080 | 4450 | 4830 |
|                       | 50            | 1780                       | 2175    | 2525 | 2895 | 3260 | 3630 | 3960 | 4295 |
|                       | 65            | 1470                       | 1800    | 2085 | 2390 | 2695 | 3000 | 3270 | 3550 |
|                       | 70            | 1340                       | 1635    | 1900 | 2175 | 2450 | 2730 | 2980 | 3230 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 560/60 R 22.5 IMP 161 D TL FLOTATION PRO

|                       |    |                            |      |      |      |                        |      |         |      |  |  |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|--|--|
| EAN                   |    | 8714692080906              |      |      |      | Section width          |      | 565 mm  |      |  |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1260 mm |      |  |  |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 560 mm  |      |  |  |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3850 mm |      |  |  |
| EAN Tube              |    | 8714692285516              |      |      |      | SRI                    |      | 600     |      |  |  |
|                       |    |                            |      |      |      | Tread depth            |      | 17 mm   |      |  |  |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 264 l   |      |  |  |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |  |  |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |  |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |  |  |
| Speed (km/h)          | 10 | 3425                       | 4185 | 4850 | 5565 | 6265                   | 6975 | 7615    | 8325 |  |  |
|                       | 25 | 3005                       | 3670 | 4260 | 4885 | 5500                   | 6125 | 6680    | 7310 |  |  |
|                       | 30 | 2870                       | 3510 | 4070 | 4665 | 5255                   | 5850 | 6385    | 6985 |  |  |
|                       | 40 | 2585                       | 3160 | 3665 | 4205 | 4735                   | 5270 | 5750    | 6290 |  |  |
|                       | 50 | 2300                       | 2810 | 3260 | 3740 | 4210                   | 4690 | 5120    | 5595 |  |  |
|                       | 65 | 1900                       | 2325 | 2695 | 3090 | 3480                   | 3875 | 4230    | 4625 |  |  |
|                       | 70 | 1730                       | 2115 | 2455 | 2810 | 3165                   | 3525 | 3850    | 4210 |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 560/60 R 22.5 IMP 165 D TL FLOTATION PRO

|                       |    |                            |      |      |      |                        |      |         |      |      |      |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|------|------|
| EAN                   |    | 8714692342646              |      |      |      | Section width          |      | 565 mm  |      |      |      |
| Nominal tyre pressure |    | 5,0 bar                    |      |      |      | Overall diameter       |      | 1260 mm |      |      |      |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 560 mm  |      |      |      |
| Recommended rim width |    | AG 16.00                   |      |      |      | Rolling circumference  |      | 3850 mm |      |      |      |
| EAN Tube              |    | 8714692285516              |      |      |      | SRI                    |      | 600     |      |      |      |
|                       |    |                            |      |      |      | Tread depth            |      | 17 mm   |      |      |      |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 264 l   |      |      |      |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |      |      |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 | 4,40 | 5,00 |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |      |      |
| Speed (km/h)          | 10 | 3425                       | 4185 | 4850 | 5565 | 6265                   | 6975 | 7615    | 8325 | 8675 | 9270 |
|                       | 25 | 3005                       | 3670 | 4260 | 4885 | 5500                   | 6125 | 6680    | 7310 | 7615 | 8135 |
|                       | 30 | 2870                       | 3510 | 4070 | 4665 | 5255                   | 5850 | 6385    | 6985 | 7280 | 7775 |
|                       | 40 | 2585                       | 3160 | 3665 | 4205 | 4735                   | 5270 | 5750    | 6290 | 6555 | 7005 |
|                       | 50 | 2300                       | 2810 | 3260 | 3740 | 4210                   | 4690 | 5120    | 5595 | 5835 | 6230 |
|                       | 65 | 1900                       | 2325 | 2695 | 3090 | 3480                   | 3875 | 4230    | 4625 | 4820 | 5150 |
|                       | 70 | 1730                       | 2115 | 2455 | 2810 | 3165                   | 3525 | 3850    | 4210 | 4385 | 4685 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 620/40 R 22.5 IMP 148 D TL FLOTATION PRO

|                       |    |                            |      |      |                        |      |         |  |  |
|-----------------------|----|----------------------------|------|------|------------------------|------|---------|--|--|
| EAN                   |    | 8714692106842              |      |      | Section width          |      | 610 mm  |  |  |
| Nominal tyre pressure |    | 3,2 bar                    |      |      | Overall diameter       |      | 1090 mm |  |  |
| Tyre construction     |    | Radial                     |      |      | Static loaded radius   |      | 495 mm  |  |  |
| Recommended rim width |    | AG 20.00                   |      |      | Rolling circumference  |      | 3330 mm |  |  |
|                       |    |                            |      |      | SRI                    |      | 525     |  |  |
|                       |    |                            |      |      | Tread depth            |      | 17 mm   |  |  |
|                       |    |                            |      |      | 75% of the tyre volume |      | 190 l   |  |  |
|                       |    | Tyre pressure (bar)        |      |      |                        |      |         |  |  |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    |  |  |
|                       |    | Load capacity per tyre(kg) |      |      |                        |      |         |  |  |
| Speed (km/h)          | 10 | 2795                       | 3415 | 3960 | 4540                   | 5115 | 5670    |  |  |
|                       | 25 | 2455                       | 3000 | 3480 | 3985                   | 4490 | 4975    |  |  |
|                       | 30 | 2345                       | 2865 | 3325 | 3810                   | 4290 | 4755    |  |  |
|                       | 40 | 2110                       | 2580 | 2995 | 3430                   | 3865 | 4285    |  |  |
|                       | 50 | 1880                       | 2295 | 2665 | 3055                   | 3440 | 3810    |  |  |
|                       | 65 | 1555                       | 1900 | 2200 | 2525                   | 2840 | 3150    |  |  |
|                       | 70 | 1415                       | 1725 | 2005 | 2295                   | 2585 | 2865    |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 620/40 R 22.5 IMP 154 D TL FLOTATION PRO

|                       |    |                            |      |      |                        |      |         |      |      |
|-----------------------|----|----------------------------|------|------|------------------------|------|---------|------|------|
| EAN                   |    | 8714692155178              |      |      | Section width          |      | 610 mm  |      |      |
| Nominal tyre pressure |    | 4,0 bar                    |      |      | Overall diameter       |      | 1080 mm |      |      |
| Tyre construction     |    | Radial                     |      |      | Static loaded radius   |      | 495 mm  |      |      |
| Recommended rim width |    | AG 20.00                   |      |      | Rolling circumference  |      | 3330 mm |      |      |
|                       |    |                            |      |      | SRI                    |      | 525     |      |      |
|                       |    |                            |      |      | Tread depth            |      | 17 mm   |      |      |
|                       |    |                            |      |      | 75% of the tyre volume |      | 190 l   |      |      |
|                       |    | Tyre pressure (bar)        |      |      |                        |      |         |      |      |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40                   | 2,80 | 3,20    | 3,60 | 4,00 |
|                       |    | Load capacity per tyre(kg) |      |      |                        |      |         |      |      |
| Speed (km/h)          | 10 | 2795                       | 3415 | 3960 | 4540                   | 5115 | 5670    | 6215 | 6750 |
|                       | 25 | 2455                       | 3000 | 3480 | 3985                   | 4490 | 4975    | 5455 | 5925 |
|                       | 30 | 2345                       | 2865 | 3325 | 3810                   | 4290 | 4755    | 5215 | 5665 |
|                       | 40 | 2110                       | 2580 | 2995 | 3430                   | 3865 | 4285    | 4695 | 5100 |
|                       | 50 | 1880                       | 2295 | 2665 | 3055                   | 3440 | 3810    | 4180 | 4540 |
|                       | 65 | 1555                       | 1900 | 2200 | 2525                   | 2840 | 3150    | 3455 | 3750 |
|                       | 70 | 1415                       | 1725 | 2005 | 2295                   | 2585 | 2865    | 3145 | 3415 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 620/50 R 22.5 IMP 154 D TL FLOTATION PRO

|                            |               |      |      |      |                        |         |      |  |  |
|----------------------------|---------------|------|------|------|------------------------|---------|------|--|--|
| EAN                        | 8714692106859 |      |      |      | Section width          | 610 mm  |      |  |  |
| Nominal tyre pressure      | 3,2 bar       |      |      |      | Overall diameter       | 1185 mm |      |  |  |
| Tyre construction          | Radial        |      |      |      | Static loaded radius   | 540 mm  |      |  |  |
| Recommended rim width      | AG 20.00      |      |      |      | Rolling circumference  | 3640 mm |      |  |  |
|                            |               |      |      |      | SRI                    | 575     |      |  |  |
|                            |               |      |      |      | Tread depth            | 17 mm   |      |  |  |
|                            |               |      |      |      | 75% of the tyre volume | 239 l   |      |  |  |
| Tyre pressure (bar)        |               |      |      |      |                        |         |      |  |  |
|                            |               | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80    | 3,20 |  |  |
| Load capacity per tyre(kg) |               |      |      |      |                        |         |      |  |  |
| Speed (km/h)               | 10            | 3405 | 4160 | 4825 | 5535                   | 6230    | 6750 |  |  |
|                            | 25            | 2990 | 3655 | 4235 | 4855                   | 5470    | 5925 |  |  |
|                            | 30            | 2855 | 3490 | 4050 | 4640                   | 5225    | 5665 |  |  |
|                            | 40            | 2575 | 3145 | 3645 | 4180                   | 4710    | 5100 |  |  |
|                            | 50            | 2290 | 2800 | 3245 | 3720                   | 4190    | 4540 |  |  |
|                            | 65            | 1890 | 2310 | 2680 | 3075                   | 3460    | 3750 |  |  |
|                            | 70            | 1720 | 2105 | 2440 | 2800                   | 3150    | 3415 |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 620/50 R 22.5 IMP TL 161 D FLOTATION PRO

|                            |               |      |      |      |                        |         |      |      |      |
|----------------------------|---------------|------|------|------|------------------------|---------|------|------|------|
| EAN                        | 8714692159855 |      |      |      | Section width          | 610 mm  |      |      |      |
| Nominal tyre pressure      | 4,0 bar       |      |      |      | Overall diameter       | 1185 mm |      |      |      |
| Tyre construction          | Radial        |      |      |      | Static loaded radius   | 540 mm  |      |      |      |
| Recommended rim width      | AG 20.00      |      |      |      | Rolling circumference  | 3640 mm |      |      |      |
|                            |               |      |      |      | SRI                    | 575     |      |      |      |
|                            |               |      |      |      | Tread depth            | 17 mm   |      |      |      |
|                            |               |      |      |      | 75% of the tyre volume | 239 l   |      |      |      |
| Tyre pressure (bar)        |               |      |      |      |                        |         |      |      |      |
|                            |               | 1,20 | 1,60 | 2,00 | 2,40                   | 2,80    | 3,20 | 3,60 | 4,00 |
| Load capacity per tyre(kg) |               |      |      |      |                        |         |      |      |      |
| Speed (km/h)               | 10            | 3405 | 4160 | 4825 | 5535                   | 6230    | 6750 | 7575 | 8325 |
|                            | 25            | 2990 | 3655 | 4235 | 4855                   | 5470    | 5925 | 6650 | 7310 |
|                            | 30            | 2855 | 3490 | 4050 | 4640                   | 5225    | 5665 | 6355 | 6985 |
|                            | 40            | 2575 | 3145 | 3645 | 4180                   | 4710    | 5100 | 5720 | 6290 |
|                            | 50            | 2290 | 2800 | 3245 | 3720                   | 4190    | 4540 | 5090 | 5595 |
|                            | 65            | 1890 | 2310 | 2680 | 3075                   | 3460    | 3750 | 4205 | 4625 |
|                            | 70            | 1720 | 2105 | 2440 | 2800                   | 3150    | 3415 | 3830 | 4210 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 650/50 R 22.5 IMP 157 D TL FLOTATION PRO

|                       |    |                            |      |      |                        |      |         |      |  |      |  |      |  |
|-----------------------|----|----------------------------|------|------|------------------------|------|---------|------|--|------|--|------|--|
| EAN                   |    | 8714692055942              |      |      | Section width          |      | 645 mm  |      |  |      |  |      |  |
| Nominal tyre pressure |    | 3,2 bar                    |      |      | Overall diameter       |      | 1250 mm |      |  |      |  |      |  |
| Tyre construction     |    | Radial                     |      |      | Static loaded radius   |      | 560 mm  |      |  |      |  |      |  |
| Recommended rim width |    | AG 20.00                   |      |      | Rolling circumference  |      | 3850 mm |      |  |      |  |      |  |
|                       |    |                            |      |      | SRI                    |      | 575     |      |  |      |  |      |  |
|                       |    |                            |      |      | Tread depth            |      | 17 mm   |      |  |      |  |      |  |
|                       |    |                            |      |      | 75% of the tyre volume |      | 304 l   |      |  |      |  |      |  |
|                       |    | Tyre pressure (bar)        |      |      |                        |      |         |      |  |      |  |      |  |
|                       |    | 1,20                       |      | 1,60 |                        | 2,00 |         | 2,40 |  | 2,80 |  | 3,20 |  |
|                       |    | Load capacity per tyre(kg) |      |      |                        |      |         |      |  |      |  |      |  |
| Speed (km/h)          | 10 | 3670                       | 4485 | 5200 | 5960                   | 6710 | 7425    |      |  |      |  |      |  |
|                       | 25 | 3220                       | 3935 | 4565 | 5230                   | 5890 | 6520    |      |  |      |  |      |  |
|                       | 30 | 3075                       | 3760 | 4360 | 5000                   | 5630 | 6230    |      |  |      |  |      |  |
|                       | 40 | 2770                       | 3385 | 3930 | 4505                   | 5070 | 5610    |      |  |      |  |      |  |
|                       | 50 | 2465                       | 3015 | 3495 | 4005                   | 4510 | 4990    |      |  |      |  |      |  |
|                       | 65 | 2040                       | 2490 | 2890 | 3310                   | 3730 | 4125    |      |  |      |  |      |  |
|                       | 70 | 1855                       | 2265 | 2630 | 3015                   | 3395 | 3755    |      |  |      |  |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 650/50 R 22.5 IMP 163 D TL FLOTATION PRO

|                       |    |                            |      |      |                        |      |         |      |      |      |  |      |  |      |  |      |  |
|-----------------------|----|----------------------------|------|------|------------------------|------|---------|------|------|------|--|------|--|------|--|------|--|
| EAN                   |    | 8714692080920              |      |      | Section width          |      | 645 mm  |      |      |      |  |      |  |      |  |      |  |
| Nominal tyre pressure |    | 4,0 bar                    |      |      | Overall diameter       |      | 1250 mm |      |      |      |  |      |  |      |  |      |  |
| Tyre construction     |    | Radial                     |      |      | Static loaded radius   |      | 560 mm  |      |      |      |  |      |  |      |  |      |  |
| Recommended rim width |    | AG 20.00                   |      |      | Rolling circumference  |      | 3850 mm |      |      |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      | SRI                    |      | 575     |      |      |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      | Tread depth            |      | 17 mm   |      |      |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      | Tie bar height         |      | 0 mm    |      |      |      |  |      |  |      |  |      |  |
|                       |    |                            |      |      | 75% of the tyre volume |      | 304 l   |      |      |      |  |      |  |      |  |      |  |
|                       |    | Tyre pressure (bar)        |      |      |                        |      |         |      |      |      |  |      |  |      |  |      |  |
|                       |    | 1,20                       |      | 1,60 |                        | 2,00 |         | 2,40 |      | 2,80 |  | 3,20 |  | 3,60 |  | 4,00 |  |
|                       |    | Load capacity per tyre(kg) |      |      |                        |      |         |      |      |      |  |      |  |      |  |      |  |
| Speed (km/h)          | 10 | 3670                       | 4485 | 5200 | 5960                   | 6710 | 7425    | 8155 | 8775 |      |  |      |  |      |  |      |  |
|                       | 25 | 3220                       | 3935 | 4565 | 5230                   | 5890 | 6520    | 7160 | 7705 |      |  |      |  |      |  |      |  |
|                       | 30 | 3075                       | 3760 | 4360 | 5000                   | 5630 | 6230    | 6845 | 7360 |      |  |      |  |      |  |      |  |
|                       | 40 | 2770                       | 3385 | 3930 | 4505                   | 5070 | 5610    | 6165 | 6630 |      |  |      |  |      |  |      |  |
|                       | 50 | 2465                       | 3015 | 3495 | 4005                   | 4510 | 4990    | 5485 | 5900 |      |  |      |  |      |  |      |  |
|                       | 65 | 2040                       | 2490 | 2890 | 3310                   | 3730 | 4125    | 4530 | 4875 |      |  |      |  |      |  |      |  |
|                       | 70 | 1855                       | 2265 | 2630 | 3015                   | 3395 | 3755    | 4125 | 4435 |      |  |      |  |      |  |      |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



## 710/40 R 22.5 IMP 161 D TL FLOTATION PRO

|                       |    |                            |      |      |      |                        |      |         |      |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |    | 8714692295560              |      |      |      | Section width          |      | 705 mm  |      |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1140 mm |      |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 520 mm  |      |
| Recommended rim width |    | AG 24.00                   |      |      |      | Rolling circumference  |      | 3520 mm |      |
|                       |    |                            |      |      |      | SRI                    |      | 550     |      |
|                       |    |                            |      |      |      | Tread depth            |      | 17 mm   |      |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 250 l   |      |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10 | 3445                       | 4210 | 4885 | 5600 | 6305                   | 6975 | 7665    | 8325 |
|                       | 25 | 3025                       | 3695 | 4290 | 4915 | 5535                   | 6125 | 6730    | 7310 |
|                       | 30 | 2890                       | 3535 | 4100 | 4700 | 5290                   | 5850 | 6430    | 6985 |
|                       | 40 | 2605                       | 3185 | 3690 | 4230 | 4765                   | 5270 | 5790    | 6290 |
|                       | 50 | 2315                       | 2830 | 3285 | 3765 | 4240                   | 4690 | 5150    | 5595 |
|                       | 65 | 1915                       | 2340 | 2715 | 3110 | 3505                   | 3875 | 4260    | 4625 |
|                       | 70 | 1740                       | 2130 | 2470 | 2830 | 3190                   | 3525 | 3875    | 4210 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 620/55 R 26.5 IMP 166 D TL FLOTATION PRO

|                       |    |                            |      |      |      |                        |      |         |      |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|------|
| EAN                   |    | 8714692110221              |      |      |      | Section width          |      | 625 mm  |      |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1360 mm |      |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 620 mm  |      |
| Recommended rim width |    | AG 20.00                   |      |      |      | Rolling circumference  |      | 4200 mm |      |
|                       |    |                            |      |      |      | SRI                    |      | 650     |      |
|                       |    |                            |      |      |      | Tread depth            |      | 19 mm   |      |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 327 l   |      |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |      |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00 |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |      |
| Speed (km/h)          | 10 | 3985                       | 4870 | 5645 | 6475 | 7290                   | 8100 | 8860    | 9540 |
|                       | 25 | 3495                       | 4275 | 4955 | 5685 | 6400                   | 7110 | 7775    | 8375 |
|                       | 30 | 3340                       | 4085 | 4735 | 5430 | 6115                   | 6795 | 7435    | 8005 |
|                       | 40 | 3010                       | 3680 | 4265 | 4890 | 5510                   | 6120 | 6695    | 7210 |
|                       | 50 | 2680                       | 3275 | 3795 | 4350 | 4900                   | 5445 | 5955    | 6415 |
|                       | 65 | 2215                       | 2705 | 3135 | 3595 | 4050                   | 4500 | 4920    | 5300 |
|                       | 70 | 2015                       | 2460 | 2855 | 3275 | 3685                   | 4095 | 4480    | 4825 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT RADIAL —

## 710/50 R 26.5 IMP 170 D TL FLOTATION PRO

|                       |    |                            |      |      |      |                        |      |         |       |
|-----------------------|----|----------------------------|------|------|------|------------------------|------|---------|-------|
| EAN                   |    | 8714692198700              |      |      |      | Section width          |      | 710 mm  |       |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |      | 1360 mm |       |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |      | 620 mm  |       |
| Recommended rim width |    | AG 24.00                   |      |      |      | Rolling circumference  |      | 4200 mm |       |
|                       |    |                            |      |      |      | SRI                    |      | 650     |       |
|                       |    |                            |      |      |      | Tread depth            |      | 19 mm   |       |
|                       |    |                            |      |      |      | 75% of the tyre volume |      | 374 l   |       |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |      |         |       |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20 | 3,60    | 4,00  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |      |         |       |
| Speed (km/h)          | 10 | 4450                       | 5440 | 6310 | 7235 | 8145                   | 9000 | 9900    | 10800 |
|                       | 25 | 3905                       | 4775 | 5540 | 6350 | 7150                   | 7900 | 8690    | 9480  |
|                       | 30 | 3735                       | 4565 | 5290 | 6070 | 6835                   | 7550 | 8305    | 9060  |
|                       | 40 | 3365                       | 4110 | 4765 | 5465 | 6155                   | 6800 | 7480    | 8160  |
|                       | 50 | 2990                       | 3655 | 4240 | 4860 | 5475                   | 6050 | 6655    | 7260  |
|                       | 65 | 2475                       | 3020 | 3505 | 4020 | 4525                   | 5000 | 5500    | 6000  |
|                       | 70 | 2250                       | 2750 | 3190 | 3655 | 4120                   | 4550 | 5005    | 5460  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 800/45 R 26.5 IMP 174 D TL FLOTATION PRO

|                       |    |                            |      |      |      |                        |       |         |       |
|-----------------------|----|----------------------------|------|------|------|------------------------|-------|---------|-------|
| EAN                   |    | 8714692198724              |      |      |      | Section width          |       | 800 mm  |       |
| Nominal tyre pressure |    | 4,0 bar                    |      |      |      | Overall diameter       |       | 1370 mm |       |
| Tyre construction     |    | Radial                     |      |      |      | Static loaded radius   |       | 625 mm  |       |
| Recommended rim width |    | AG 28.00                   |      |      |      | Rolling circumference  |       | 4200 mm |       |
|                       |    |                            |      |      |      | SRI                    |       | 675     |       |
|                       |    |                            |      |      |      | Tread depth            |       | 19 mm   |       |
|                       |    |                            |      |      |      | 75% of the tyre volume |       | 423 l   |       |
|                       |    | Tyre pressure (bar)        |      |      |      |                        |       |         |       |
|                       |    | 1,20                       | 1,60 | 2,00 | 2,40 | 2,80                   | 3,20  | 3,60    | 4,00  |
|                       |    | Load capacity per tyre(kg) |      |      |      |                        |       |         |       |
| Speed (km/h)          | 10 | 4955                       | 6060 | 7025 | 8055 | 9070                   | 10080 | 11025   | 12060 |
|                       | 25 | 4350                       | 5320 | 6165 | 7070 | 7960                   | 8850  | 9675    | 10585 |
|                       | 30 | 4160                       | 5080 | 5895 | 6755 | 7610                   | 8455  | 9250    | 10115 |
|                       | 40 | 3745                       | 4575 | 5310 | 6085 | 6855                   | 7615  | 8330    | 9110  |
|                       | 50 | 3330                       | 4070 | 4725 | 5415 | 6095                   | 6775  | 7410    | 8105  |
|                       | 65 | 2755                       | 3365 | 3905 | 4475 | 5040                   | 5600  | 6125    | 6700  |
|                       | 70 | 2505                       | 3065 | 3550 | 4070 | 4585                   | 5095  | 5575    | 6095  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT — RADIAL



# IMPLEMENT BIAS



## FLOTATION+

IDEAL FOR HEAVY DUTY WORK

### FEATURES

Sophisticated carcass construction

Large contact area

Good height/width ratio

### BENEFITS






High load capacity

Minimal soil compaction

Exceptional stability



# FLOTATION+

| Ø    | Tyre size         | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|------|-------------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 15.3 | 260/70 - 15.3 IMP | 122 A8              | 3,2                              | 9.00  | 270  | 755  | 345  | 2280   | 182  |
|      | 260/70 - 15.3 IMP | 126 A8              | 3,6                              | 9.00  | 270  | 755  | 345  | 2280   | 182  |
|      | 260/70 - 15.3 IMP | 131 A8              | 5,0                              | 9.00  | 270  | 755  | 345  | 2280   | 183  |
|      | 300/80 - 15.3 IMP | 132 A8              | 2,8                              | 9.00  | 295  | 865  | 385  | 2575   | 183  |
|      | 300/80 - 15.3 IMP | 138 A8              | 3,6                              | 9.00  | 295  | 865  | 385  | 2575   | 184  |
|      | 300/80 - 15.3 IMP | 141 A8              | 4,0                              | 9.00  | 295  | 865  | 385  | 2575   | 184  |
| 15.5 | 400/60 - 15.5 IMP | 145 A8              | 3,6                              | AG 13.00  | 410  | 850  | 380  | 2530   | 185  |
| 16   | 340/55 - 16 IMP   | 133 A8              | 3,2                              | 11  | 345  | 780  | 365  | 2360   | 185  |
| 17   | 380/55 - 17 IMP   | 133 A8              | 2,4                              | 13.00   | 380  | 845  | 385  | 2530   | 186  |
|      | 380/55 - 17 IMP   | 138 A8              | 2,8                              | 13.00   | 380  | 845  | 385  | 2530   | 186  |
|      | 480/45 - 17 IMP   | 140 A8              | 2,4                              | 16.00   | 480  | 860  | 400  | 2565   | 187  |
|      | 480/45 - 17 IMP   | 146 A8              | 3,2                              | 16.00   | 480  | 860  | 400  | 2565   | 187  |
|      | 500/50 - 17 IMP   | 140 A8              | 2,0                              | 16.00   | 500  | 950  | 430  | 2890   | 188  |
|      | 500/50 - 17 IMP   | 149 A8              | 2,8                              | 16.00   | 500  | 950  | 430  | 2890   | 188  |
| 20   | 400/70 - 20 IMP   | 150 A8              | 2,8                              | 14  | 420  | 1080   | 485  | 3215   | 189  |
|      | 460/65 - 20 IMP   | 155 A8              | 2,8                              | 14  | 460  | 1100   | 485  | 3300   | 189  |
|      | 500/55 - 20 IMP   | 150 A8              | 2,4                              | 16.00   | 515  | 1060   | 475  | 3160   | 190  |
| 22.5 | 560/60 - 22.5 IMP | 167 A8              | 2,8                              | AG 16.00  | 565  | 1240   | 550  | 3700   | 190  |
|      | 600/55 - 22.5 IMP | 168 A8              | 2,8                              | AG 20.00  | 625  | 1230   | 550  | 3700   | 191  |
|      | 710/45 - 22.5 IMP | 171 A8              | 2,8                              | AG 24.00  | 730  | 1240   | 550  | 3700   | 191  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 260/70 - 15.3 IMP 122 A8 TL FLOTATION+

|                       |               |                                |                       |         |      |      |      |      |      |     |
|-----------------------|---------------|--------------------------------|-----------------------|---------|------|------|------|------|------|-----|
| EAN                   | 8714692174803 |                                | Section width         | 270 mm  |      |      |      |      |      |     |
| Nominal tyre pressure | 3,2 bar       |                                | Overall diameter      | 755 mm  |      |      |      |      |      |     |
| Tyre construction     | Diagonaal     |                                | Static loaded radius  | 345 mm  |      |      |      |      |      |     |
| Recommended rim width | 9.00          |                                | Rolling circumference | 2280 mm |      |      |      |      |      |     |
| EAN Tube              | 8714692239007 |                                | Tread depth           | 10 mm   |      |      |      |      |      |     |
|                       |               | Tyre pressure (bar)            |                       |         |      |      |      |      |      |     |
|                       |               | 1,00                           | 1,40                  | 1,80    | 2,20 | 2,60 | 3,00 | 3,20 | 4,00 |     |
|                       |               | LLV Load capacity per tyre(kg) |                       |         |      |      |      |      |      | HLV |
| Speed (km/h)          | 10            | 885                            | 1110                  | 1330    | 1550 | 1770 | 1990 | 2100 | 2550 |     |
|                       | 25            | 755                            | 940                   | 1130    | 1320 | 1510 | 1690 | 1790 | 2160 |     |
|                       | 30            | 710                            | 885                   | 1060    | 1240 | 1420 | 1590 | 1680 | 2040 |     |
|                       | 40            |                                | 790                   | 950     | 1110 | 1260 | 1420 | 1500 | 1820 |     |
|                       | 50            |                                |                       | 855     | 995  | 1140 | 1280 | 1350 | 1640 |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 260/70 - 15.3 IMP 126 A8 TL FLOTATION+

|                       |               |                                |                       |         |      |      |      |      |      |      |
|-----------------------|---------------|--------------------------------|-----------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692174810 |                                | Section width         | 270 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 3,6 bar       |                                | Overall diameter      | 755 mm  |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |                                | Static loaded radius  | 345 mm  |      |      |      |      |      |      |
| Recommended rim width | 9.00          |                                | Rolling circumference | 2280 mm |      |      |      |      |      |      |
| EAN Tube              | 8714692239007 |                                | Tread depth           | 10 mm   |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)            |                       |         |      |      |      |      |      |      |
|                       |               | 1,00                           | 1,40                  | 1,80    | 2,20 | 2,60 | 3,00 | 3,40 | 3,60 | 4,40 |
|                       |               | LLV Load capacity per tyre(kg) |                       |         |      |      |      |      |      | HLV  |
| Speed (km/h)          | 10            | 905                            | 1130                  | 1360    | 1590 | 1810 | 2040 | 2270 | 2380 | 2830 |
|                       | 25            | 770                            | 965                   | 1160    | 1350 | 1540 | 1730 | 1930 | 2020 | 2410 |
|                       | 30            | 725                            | 905                   | 1090    | 1270 | 1450 | 1630 | 1810 | 1900 | 2270 |
|                       | 40            |                                | 810                   | 970     | 1130 | 1300 | 1460 | 1620 | 1700 | 2020 |
|                       | 50            |                                |                       | 875     | 1020 | 1170 | 1310 | 1460 | 1530 | 1820 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 260/70 - 15.3 IMP 131 A8 TL FLOTATION+

|                       |    |                            |      |      |      |      |                       |      |         |      |      |  |
|-----------------------|----|----------------------------|------|------|------|------|-----------------------|------|---------|------|------|--|
| EAN                   |    | 8714692174827              |      |      |      |      | Section width         |      | 270 mm  |      |      |  |
| Nominal tyre pressure |    | 5,0 bar                    |      |      |      |      | Overall diameter      |      | 755 mm  |      |      |  |
| Tyre construction     |    | Diagonaal                  |      |      |      |      | Static loaded radius  |      | 345 mm  |      |      |  |
| Recommended rim width |    | 9.00                       |      |      |      |      | Rolling circumference |      | 2280 mm |      |      |  |
| EAN Tube              |    | 8714692239007              |      |      |      |      | Tread depth           |      | 10 mm   |      |      |  |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                       |      |         |      |      |  |
|                       |    | 1,00                       | 1,50 | 2,00 | 2,50 | 3,00 | 3,50                  | 4,00 | 4,50    | 5,00 | 6,00 |  |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                       |      |         |      |      |  |
|                       |    | LLV                        |      |      |      |      |                       |      |         |      | HLV  |  |
| Speed (km/h)          | 10 | 780                        | 1020 | 1270 | 1510 | 1760 | 2000                  | 2240 | 2490    | 2730 | 3220 |  |
|                       | 25 | 665                        | 870  | 1080 | 1280 | 1490 | 1700                  | 1910 | 2110    | 2320 | 2740 |  |
|                       | 30 | 625                        | 820  | 1010 | 1210 | 1400 | 1600                  | 1790 | 1990    | 2180 | 2570 |  |
|                       | 40 |                            | 730  | 905  | 1080 | 1250 | 1430                  | 1600 | 1780    | 1950 | 2300 |  |
|                       | 50 |                            |      | 815  | 970  | 1130 | 1290                  | 1440 | 1600    | 1760 | 2070 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 300/80 - 15.3 IMP 132 A8 TL FLOTATION+

|                       |    |                            |      |      |      |      |                       |      |         |      |      |      |
|-----------------------|----|----------------------------|------|------|------|------|-----------------------|------|---------|------|------|------|
| EAN                   |    | 8714692174834              |      |      |      |      | Section width         |      | 295 mm  |      |      |      |
| Nominal tyre pressure |    | 2,8 bar                    |      |      |      |      | Overall diameter      |      | 865 mm  |      |      |      |
| Tyre construction     |    | Diagonaal                  |      |      |      |      | Static loaded radius  |      | 385 mm  |      |      |      |
| Recommended rim width |    | 9.00                       |      |      |      |      | Rolling circumference |      | 2575 mm |      |      |      |
| EAN Tube              |    | 8714692239014              |      |      |      |      | Tread depth           |      | 11 mm   |      |      |      |
|                       |    | Tyre pressure (bar)        |      |      |      |      |                       |      |         |      |      |      |
|                       |    | 1,00                       | 1,20 | 1,40 | 1,60 | 1,80 | 2,00                  | 2,20 | 2,40    | 2,60 | 2,80 | 3,40 |
|                       |    | Load capacity per tyre(kg) |      |      |      |      |                       |      |         |      |      |      |
|                       |    | LLV                        |      |      |      |      |                       |      |         |      |      | HLV  |
| Speed (km/h)          | 10 | 1320                       | 1480 | 1650 | 1810 | 1980 | 2140                  | 2310 | 2470    | 2630 | 2800 | 3300 |
|                       | 25 | 1120                       | 1260 | 1400 | 1540 | 1680 | 1820                  | 1960 | 2100    | 2240 | 2380 | 2800 |
|                       | 30 | 1050                       | 1190 | 1320 | 1450 | 1580 | 1710                  | 1840 | 1980    | 2110 | 2240 | 2630 |
|                       | 40 |                            |      | 1180 | 1290 | 1410 | 1530                  | 1650 | 1760    | 1880 | 2000 | 2350 |
|                       | 50 |                            |      |      |      | 1270 | 1380                  | 1480 | 1590    | 1690 | 1800 | 2120 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 300/80 - 15.3 IMP 138 A8 TL FLOTATION+

|                       |               |                                    |                       |         |      |      |      |      |      |      |  |
|-----------------------|---------------|------------------------------------|-----------------------|---------|------|------|------|------|------|------|--|
| EAN                   | 8714692174841 |                                    | Section width         | 295 mm  |      |      |      |      |      |      |  |
| Nominal tyre pressure | 3,6 bar       |                                    | Overall diameter      | 865 mm  |      |      |      |      |      |      |  |
| Tyre construction     | Diagonaal     |                                    | Static loaded radius  | 385 mm  |      |      |      |      |      |      |  |
| Recommended rim width | 9.00          |                                    | Rolling circumference | 2575 mm |      |      |      |      |      |      |  |
| EAN Tube              | 8714692239014 |                                    | Tread depth           | 11 mm   |      |      |      |      |      |      |  |
|                       |               | Tyre pressure (bar)                |                       |         |      |      |      |      |      |      |  |
|                       |               | 1,00                               | 1,40                  | 1,80    | 2,20 | 2,60 | 3,00 | 3,40 | 3,60 | 4,40 |  |
|                       |               | LLV Load capacity per tyre(kg) HLV |                       |         |      |      |      |      |      |      |  |
| Speed (km/h)          | 10            | 1260                               | 1570                  | 1890    | 2200 | 2520 | 2830 | 3140 | 3300 | 3940 |  |
|                       | 25            | 1070                               | 1340                  | 1600    | 1870 | 2140 | 2410 | 2670 | 2810 | 3340 |  |
|                       | 30            | 1010                               | 1260                  | 1510    | 1760 | 2010 | 2270 | 2520 | 2640 | 3140 |  |
|                       | 40            |                                    | 1120                  | 1350    | 1570 | 1800 | 2020 | 2250 | 2360 | 2810 |  |
|                       | 50            |                                    |                       | 1210    | 1420 | 1620 | 1820 | 2020 | 2120 | 2530 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 300/80 - 15.3 IMP 141 A8 TL FLOTATION+

|                       |               |                                    |                       |         |      |      |      |      |      |      |      |
|-----------------------|---------------|------------------------------------|-----------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692174858 |                                    | Section width         | 295 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar       |                                    | Overall diameter      | 865 mm  |      |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |                                    | Static loaded radius  | 385 mm  |      |      |      |      |      |      |      |
| Recommended rim width | 9.00          |                                    | Rolling circumference | 2575 mm |      |      |      |      |      |      |      |
| EAN Tube              | 8714692239014 |                                    | Tread depth           | 11 mm   |      |      |      |      |      |      |      |
|                       |               | Tyre pressure (bar)                |                       |         |      |      |      |      |      |      |      |
|                       |               | 1,00                               | 1,40                  | 1,80    | 2,20 | 2,60 | 3,00 | 3,40 | 3,80 | 4,00 | 5,00 |
|                       |               | LLV Load capacity per tyre(kg) HLV |                       |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 1260                               | 1570                  | 1890    | 2200 | 2520 | 2830 | 3140 | 3440 | 3600 | 4400 |
|                       | 25            | 1070                               | 1340                  | 1600    | 1870 | 2140 | 2410 | 2670 | 2930 | 3060 | 3740 |
|                       | 30            | 1010                               | 1260                  | 1510    | 1760 | 2010 | 2270 | 2520 | 2760 | 2890 | 3520 |
|                       | 40            |                                    | 1120                  | 1350    | 1570 | 1800 | 2020 | 2250 | 2460 | 2580 | 3140 |
|                       | 50            |                                    |                       | 1210    | 1420 | 1620 | 1820 | 2020 | 2220 | 2320 | 2820 |

For the explanation of the symbols and abbreviations, see the inside of the last page.



## 400/60 - 15.5 IMP 145 A8 TL FLOTATION+

|                       |    |                                |      |      |      |      |                       |      |         |      |  |
|-----------------------|----|--------------------------------|------|------|------|------|-----------------------|------|---------|------|--|
| EAN                   |    | 8714692076787                  |      |      |      |      | Section width         |      | 410 mm  |      |  |
| Nominal tyre pressure |    | 3,6 bar                        |      |      |      |      | Overall diameter      |      | 850 mm  |      |  |
| Tyre construction     |    | Diagonaal                      |      |      |      |      | Static loaded radius  |      | 380 mm  |      |  |
| Recommended rim width |    | AG 13.00                       |      |      |      |      | Rolling circumference |      | 2530 mm |      |  |
| EAN Tube              |    | 8714692239038                  |      |      |      |      | Tread depth           |      | 14 mm   |      |  |
|                       |    | Tyre pressure (bar)            |      |      |      |      |                       |      |         |      |  |
|                       |    | 1,00                           | 1,40 | 1,80 | 2,20 | 2,60 | 3,00                  | 3,40 | 3,60    | 4,40 |  |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |      |                       |      |         | HLV  |  |
| Speed (km/h)          | 10 | 1550                           | 1940 | 2320 | 2710 | 3100 | 3480                  | 3880 | 4060    | 4840 |  |
|                       | 25 | 1320                           | 1640 | 1970 | 2300 | 2630 | 2960                  | 3280 | 3460    | 4120 |  |
|                       | 30 | 1240                           | 1550 | 1860 | 2170 | 2480 | 2790                  | 3100 | 3260    | 3880 |  |
|                       | 40 |                                | 1380 | 1660 | 1940 | 2210 | 2490                  | 2760 | 2900    | 3460 |  |
|                       | 50 |                                |      | 1490 | 1740 | 1990 | 2240                  | 2490 | 2610    | 3120 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 340/55 - 16 IMP 133 A8 TL FLOTATION+

|                       |    |                                |      |      |      |      |                       |      |         |     |  |
|-----------------------|----|--------------------------------|------|------|------|------|-----------------------|------|---------|-----|--|
| EAN                   |    | 8714692220432                  |      |      |      |      | Section width         |      | 345 mm  |     |  |
| Nominal tyre pressure |    | 3,2 bar                        |      |      |      |      | Overall diameter      |      | 780 mm  |     |  |
| Tyre construction     |    | Diagonaal                      |      |      |      |      | Static loaded radius  |      | 365 mm  |     |  |
| Recommended rim width |    | 11                             |      |      |      |      | Rolling circumference |      | 2360 mm |     |  |
|                       |    | Tyre pressure (bar)            |      |      |      |      |                       |      |         |     |  |
|                       |    | 1,00                           | 1,40 | 1,80 | 2,20 | 2,60 | 3,00                  | 3,20 | 4,00    |     |  |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |      |                       |      |         | HLV |  |
| Speed (km/h)          | 10 | 1300                           | 1590 | 1870 | 2160 | 2450 | 2740                  | 2880 | 3460    |     |  |
|                       | 25 | 1100                           | 1350 | 1590 | 1840 | 2080 | 2330                  | 2450 | 2940    |     |  |
|                       | 30 | 1040                           | 1270 | 1500 | 1730 | 1960 | 2190                  | 2310 | 2770    |     |  |
|                       | 40 |                                | 1130 | 1340 | 1540 | 1750 | 1960                  | 2060 | 2470    |     |  |
|                       | 50 |                                |      | 1210 | 1390 | 1580 | 1760                  | 1850 | 2220    |     |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 380/55 - 17 IMP 133 A8 TL FLOTATION+

|                       |               |      |                                |      |         |      |      |      |      |      |      |     |
|-----------------------|---------------|------|--------------------------------|------|---------|------|------|------|------|------|------|-----|
| EAN                   | 8714692236396 |      | Section width                  |      | 380 mm  |      |      |      |      |      |      |     |
| Nominal tyre pressure | 2,4 bar       |      | Overall diameter               |      | 845 mm  |      |      |      |      |      |      |     |
| Tyre construction     | Diagonaal     |      | Static loaded radius           |      | 385 mm  |      |      |      |      |      |      |     |
| Recommended rim width | 13.00         |      | Rolling circumference          |      | 2530 mm |      |      |      |      |      |      |     |
| EAN Tube              | 8714692239069 |      | Tread depth                    |      | 15 mm   |      |      |      |      |      |      |     |
|                       |               |      | Tyre pressure (bar)            |      |         |      |      |      |      |      |      |     |
|                       |               |      | 1,00                           | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 3,00 |     |
|                       |               |      | LLV Load capacity per tyre(kg) |      |         |      |      |      |      |      |      | HLV |
| Speed (km/h)          | 10            | 1540 | 1730                           | 1920 | 2110    | 2310 | 2500 | 2690 | 2880 | 3460 |      |     |
|                       | 25            | 1310 | 1470                           | 1630 | 1800    | 1960 | 2120 | 2290 | 2450 | 2940 |      |     |
|                       | 30            | 1230 | 1380                           | 1540 | 1690    | 1850 | 2000 | 2150 | 2310 | 2770 |      |     |
|                       | 40            |      |                                | 1370 | 1510    | 1650 | 1790 | 1920 | 2060 | 2470 |      |     |
|                       | 50            |      |                                |      |         | 1480 | 1610 | 1730 | 1850 | 2220 |      |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 380/55 - 17 IMP 138 A8 TL FLOTATION+

|                       |               |      |                                |      |         |      |      |      |      |      |      |      |      |
|-----------------------|---------------|------|--------------------------------|------|---------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692076770 |      | Section width                  |      | 380 mm  |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,8 bar       |      | Overall diameter               |      | 845 mm  |      |      |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |      | Static loaded radius           |      | 385 mm  |      |      |      |      |      |      |      |      |
| Recommended rim width | 13.00         |      | Rolling circumference          |      | 2530 mm |      |      |      |      |      |      |      |      |
| EAN Tube              | 8714692239069 |      | Tread depth                    |      | 15 mm   |      |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)            |      |         |      |      |      |      |      |      |      |      |
|                       |               |      | 1,00                           | 1,20 | 1,40    | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 2,60 | 2,80 | 3,40 |
|                       |               |      | LLV Load capacity per tyre(kg) |      |         |      |      |      |      |      |      | HLV  |      |
| Speed (km/h)          | 10            | 1560 | 1760                           | 1950 | 2150    | 2340 | 2540 | 2740 | 2930 | 3120 | 3320 | 3900 |      |
|                       | 25            | 1330 | 1490                           | 1660 | 1830    | 1990 | 2160 | 2330 | 2490 | 2660 | 2820 | 3320 |      |
|                       | 30            | 1250 | 1410                           | 1560 | 1720    | 1880 | 2030 | 2190 | 2340 | 2500 | 2660 | 3120 |      |
|                       | 40            |      |                                | 1400 | 1540    | 1670 | 1810 | 1950 | 2090 | 2230 | 2370 | 2790 |      |
|                       | 50            |      |                                |      |         | 1510 | 1630 | 1760 | 1880 | 2010 | 2140 | 2510 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 480/45 - 17 IMP 140 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |      |      |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|------|
| EAN                   |    | 8714692220418                  |      |      |      | Section width         |      | 480 mm  |      |      |
| Nominal tyre pressure |    | 2,4 bar                        |      |      |      | Overall diameter      |      | 860 mm  |      |      |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 400 mm  |      |      |
| Recommended rim width |    | 16.00                          |      |      |      | Rolling circumference |      | 2565 mm |      |      |
| EAN Tube              |    | 8714692239106                  |      |      |      | Tread depth           |      | 15 mm   |      |      |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |      |
|                       |    | 1,00                           | 1,20 | 1,40 | 1,60 | 1,80                  | 2,00 | 2,20    | 2,40 | 3,00 |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      | HLV  |
| Speed (km/h)          | 10 | 1870                           | 2100 | 2330 | 2570 | 2800                  | 3040 | 3260    | 3500 | 4200 |
|                       | 25 | 1590                           | 1780 | 1980 | 2180 | 2380                  | 2580 | 2780    | 2970 | 3580 |
|                       | 30 | 1490                           | 1680 | 1870 | 2050 | 2240                  | 2430 | 2610    | 2800 | 3360 |
|                       | 40 |                                |      | 1670 | 1830 | 2000                  | 2170 | 2330    | 2500 | 3000 |
|                       | 50 |                                |      |      |      | 1800                  | 1950 | 2100    | 2250 | 2700 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 480/45 - 17 IMP 146 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |      |     |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|-----|
| EAN                   |    | 8714692220425                  |      |      |      | Section width         |      | 480 mm  |      |     |
| Nominal tyre pressure |    | 3,2 bar                        |      |      |      | Overall diameter      |      | 860 mm  |      |     |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 400 mm  |      |     |
| Recommended rim width |    | 16.00                          |      |      |      | Rolling circumference |      | 2565 mm |      |     |
| EAN Tube              |    | 8714692239106                  |      |      |      | Tread depth           |      | 15 mm   |      |     |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |     |
|                       |    | 1,00                           | 1,40 | 1,80 | 2,20 | 2,60                  | 3,00 | 3,20    | 4,00 |     |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      | HLV |
| Speed (km/h)          | 10 | 1890                           | 2310 | 2730 | 3160 | 3580                  | 4000 | 4200    | 5040 |     |
|                       | 25 | 1610                           | 1960 | 2320 | 2680 | 3040                  | 3400 | 3580    | 4280 |     |
|                       | 30 | 1510                           | 1850 | 2180 | 2520 | 2860                  | 3200 | 3360    | 4040 |     |
|                       | 40 |                                | 1650 | 1950 | 2250 | 2550                  | 2850 | 3000    | 3600 |     |
|                       | 50 |                                |      | 1750 | 2030 | 2300                  | 2570 | 2700    | 3240 |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 500/50 - 17 IMP 140 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |  |  |     |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|--|--|-----|
| EAN                   |    | 8714692201004                  |      |      |      | Section width         |      | 500 mm  |  |  |     |
| Nominal tyre pressure |    | 2,0 bar                        |      |      |      | Overall diameter      |      | 950 mm  |  |  |     |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 430 mm  |  |  |     |
| Recommended rim width |    | 16.00                          |      |      |      | Rolling circumference |      | 2890 mm |  |  |     |
| EAN Tube              |    | 8714692239083                  |      |      |      | Tread depth           |      | 15 mm   |  |  |     |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |  |  |     |
|                       |    | 1,00                           | 1,25 | 1,50 | 1,75 | 2,00                  | 2,50 |         |  |  |     |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |  |  | HLV |
| Speed (km/h)          | 10 | 2150                           | 2490 | 2830 | 3160 | 3500                  | 4180 |         |  |  |     |
|                       | 25 | 1830                           | 2120 | 2400 | 2690 | 2980                  | 3540 |         |  |  |     |
|                       | 30 | 1720                           | 1990 | 2260 | 2530 | 2800                  | 3340 |         |  |  |     |
|                       | 40 |                                |      | 2020 | 2260 | 2500                  | 2980 |         |  |  |     |
|                       | 50 |                                |      |      |      | 2250                  | 2680 |         |  |  |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 500/50 - 17 IMP 149 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |      |      |      |      |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|------|------|------|
| EAN                   |    | 8714692201042                  |      |      |      | Section width         |      | 500 mm  |      |      |      |      |
| Nominal tyre pressure |    | 2,8 bar                        |      |      |      | Overall diameter      |      | 950 mm  |      |      |      |      |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 430 mm  |      |      |      |      |
| Recommended rim width |    | 16.00                          |      |      |      | Rolling circumference |      | 2890 mm |      |      |      |      |
| EAN Tube              |    | 8714692239083                  |      |      |      | Tread depth           |      | 15 mm   |      |      |      |      |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |      |      |      |
|                       |    | 1,00                           | 1,20 | 1,40 | 1,60 | 1,80                  | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 | 3,40 |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      |      |      | HLV  |
| Speed (km/h)          | 10 | 2140                           | 2410 | 2680 | 2940 | 3220                  | 3480 | 3740    | 4020 | 4280 | 4540 | 5360 |
|                       | 25 | 1820                           | 2050 | 2270 | 2500 | 2730                  | 2960 | 3180    | 3420 | 3640 | 3860 | 4540 |
|                       | 30 | 1710                           | 1930 | 2140 | 2360 | 2570                  | 2780 | 3000    | 3220 | 3420 | 3640 | 4280 |
|                       | 40 |                                |      | 1910 | 2100 | 2290                  | 2490 | 2680    | 2870 | 3060 | 3240 | 3820 |
|                       | 50 |                                |      |      |      | 2060                  | 2240 | 2410    | 2580 | 2750 | 2920 | 3440 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 400/70 - 20 IMP 150 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |      |      |      |      |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|------|------|------|
| EAN                   |    | 8714692235245                  |      |      |      | Section width         |      | 420 mm  |      |      |      |      |
| Nominal tyre pressure |    | 2,8 bar                        |      |      |      | Overall diameter      |      | 1080 mm |      |      |      |      |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 485 mm  |      |      |      |      |
| Recommended rim width |    | 14                             |      |      |      | Rolling circumference |      | 3215 mm |      |      |      |      |
| EAN Tube              |    | 8714692239113                  |      |      |      | Tread depth           |      | 14 mm   |      |      |      |      |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |      |      |      |
|                       |    | 1,00                           | 1,20 | 1,40 | 1,60 | 1,80                  | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 | 3,40 |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      |      |      | HLV  |
| Speed (km/h)          | 10 | 2280                           | 2550 | 2810 | 3080 | 3340                  | 3620 | 3880    | 4160 | 4420 | 4680 | 5500 |
|                       | 25 | 1940                           | 2160 | 2390 | 2620 | 2850                  | 3080 | 3300    | 3540 | 3760 | 3980 | 4660 |
|                       | 30 | 1820                           | 2040 | 2250 | 2470 | 2680                  | 2890 | 3100    | 3320 | 3540 | 3760 | 4400 |
|                       | 40 |                                |      | 2010 | 2200 | 2390                  | 2580 | 2780    | 2970 | 3160 | 3340 | 3920 |
|                       | 50 |                                |      |      |      | 2150                  | 2330 | 2500    | 2670 | 2840 | 3020 | 3540 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 460/65 - 20 IMP 155 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |      |      |      |      |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|------|------|------|
| EAN                   |    | 8714692235252                  |      |      |      | Section width         |      | 460 mm  |      |      |      |      |
| Nominal tyre pressure |    | 2,8 bar                        |      |      |      | Overall diameter      |      | 1100 mm |      |      |      |      |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 485 mm  |      |      |      |      |
| Recommended rim width |    | 14                             |      |      |      | Rolling circumference |      | 3300 mm |      |      |      |      |
| EAN Tube              |    | 8714692239113                  |      |      |      | Tread depth           |      | 14 mm   |      |      |      |      |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |      |      |      |
|                       |    | 1,00                           | 1,20 | 1,40 | 1,60 | 1,80                  | 2,00 | 2,20    | 2,40 | 2,60 | 2,80 | 3,40 |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      |      |      | HLV  |
| Speed (km/h)          | 10 | 2630                           | 2940 | 3260 | 3560 | 3880                  | 4180 | 4500    | 4800 | 5120 | 5420 | 6350 |
|                       | 25 | 2240                           | 2500 | 2770 | 3040 | 3300                  | 3560 | 3820    | 4080 | 4340 | 4620 | 5400 |
|                       | 30 | 2110                           | 2360 | 2600 | 2850 | 3100                  | 3340 | 3600    | 3840 | 4100 | 4340 | 5080 |
|                       | 40 |                                |      | 2320 | 2550 | 2770                  | 2990 | 3220    | 3440 | 3660 | 3880 | 4540 |
|                       | 50 |                                |      |      |      | 2490                  | 2690 | 2890    | 3080 | 3280 | 3480 | 4080 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 500/55 - 20 IMP 150 A8 TL FLOTATION+

|                       |               |      |                                |         |      |      |      |      |      |      |      |
|-----------------------|---------------|------|--------------------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692174865 |      | Section width                  | 515 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,4 bar       |      | Overall diameter               | 1060 mm |      |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |      | Static loaded radius           | 475 mm  |      |      |      |      |      |      |      |
| Recommended rim width | 16.00         |      | Rolling circumference          | 3160 mm |      |      |      |      |      |      |      |
| EAN Tube              | 8714692239113 |      | Tread depth                    | 14 mm   |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)            |         |      |      |      |      |      |      |      |
|                       |               |      | 1,00                           | 1,20    | 1,40 | 1,60 | 1,80 | 2,00 | 2,20 | 2,40 | 3,00 |
|                       |               |      | LLV Load capacity per tyre(kg) |         |      |      |      |      |      |      | HLV  |
| Speed (km/h)          | 10            | 2500 | 2810                           | 3120    | 3440 | 3760 | 4060 | 4380 | 4680 | 5620 |      |
|                       | 25            | 2130 | 2390                           | 2660    | 2920 | 3180 | 3460 | 3720 | 3980 | 4780 |      |
|                       | 30            | 2000 | 2250                           | 2500    | 2750 | 3000 | 3260 | 3500 | 3760 | 4500 |      |
|                       | 40            |      |                                | 2230    | 2460 | 2680 | 2900 | 3120 | 3340 | 4020 |      |
|                       | 50            |      |                                |         |      | 2410 | 2610 | 2810 | 3020 | 3620 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 560/60 - 22.5 IMP 167 A8 TL FLOTATION+

|                       |               |      |                                |         |      |      |      |      |      |      |      |
|-----------------------|---------------|------|--------------------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692220364 |      | Section width                  | 565 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 2,8 bar       |      | Overall diameter               | 1240 mm |      |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |      | Static loaded radius           | 550 mm  |      |      |      |      |      |      |      |
| Recommended rim width | AG 16.00      |      | Rolling circumference          | 3700 mm |      |      |      |      |      |      |      |
| EAN Tube              | 8714692335044 |      | Tread depth                    | 20 mm   |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)            |         |      |      |      |      |      |      |      |
|                       |               |      | 1,00                           | 1,25    | 1,50 | 1,75 | 2,00 | 2,25 | 2,50 | 2,75 | 3,50 |
|                       |               |      | LLV Load capacity per tyre(kg) |         |      |      |      |      |      |      | HLV  |
| Speed (km/h)          | 10            | 3700 | 4260                           | 4800    | 5340 | 5880 | 6450 | 7000 | 7500 | 9150 |      |
|                       | 25            | 3160 | 3620                           | 4080    | 4540 | 5000 | 5460 | 5920 | 6400 | 7800 |      |
|                       | 30            | 2960 | 3400                           | 3840    | 4280 | 4700 | 5140 | 5580 | 6000 | 7300 |      |
|                       | 40            |      |                                | 3420    | 3820 | 4200 | 4600 | 4980 | 5380 | 6550 |      |
|                       | 50            |      |                                |         |      | 3780 | 4140 | 4480 | 4840 | 5880 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 600/55 - 22.5 IMP 168 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |      |      |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|------|
| EAN                   |    | 8714692220388                  |      |      |      | Section width         |      | 625 mm  |      |      |
| Nominal tyre pressure |    | 2,8 bar                        |      |      |      | Overall diameter      |      | 1230 mm |      |      |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 550 mm  |      |      |
| Recommended rim width |    | AG 20.00                       |      |      |      | Rolling circumference |      | 3700 mm |      |      |
| EAN Tube              |    | 8714692335037                  |      |      |      | Tread depth           |      | 20 mm   |      |      |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |      |
|                       |    | 1,00                           | 1,25 | 1,50 | 1,75 | 2,00                  | 2,25 | 2,50    | 2,75 | 3,50 |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      | HLV  |
| Speed (km/h)          | 10 | 3800                           | 4360 | 4920 | 5480 | 6050                  | 6600 | 7150    | 7750 | 9400 |
|                       | 25 | 3240                           | 3720 | 4180 | 4660 | 5140                  | 5620 | 6100    | 6550 | 8000 |
|                       | 30 | 3040                           | 3500 | 3940 | 4400 | 4840                  | 5280 | 5740    | 6200 | 7550 |
|                       | 40 |                                |      | 3520 | 3920 | 4320                  | 4720 | 5120    | 5520 | 6700 |
|                       | 50 |                                |      |      |      | 3880                  | 4240 | 4600    | 4960 | 6050 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 710/45 - 22.5 IMP 171 A8 TL FLOTATION+

|                       |    |                                |      |      |      |                       |      |         |      |       |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|-------|
| EAN                   |    | 8714692220401                  |      |      |      | Section width         |      | 730 mm  |      |       |
| Nominal tyre pressure |    | 2,8 bar                        |      |      |      | Overall diameter      |      | 1240 mm |      |       |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 550 mm  |      |       |
| Recommended rim width |    | AG 24.00                       |      |      |      | Rolling circumference |      | 3700 mm |      |       |
| EAN Tube              |    | 8714692335020                  |      |      |      | Tread depth           |      | 20 mm   |      |       |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |       |
|                       |    | 1,00                           | 1,25 | 1,50 | 1,75 | 2,00                  | 2,25 | 2,50    | 2,75 | 3,50  |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      | HLV   |
| Speed (km/h)          | 10 | 4180                           | 4800 | 5420 | 6050 | 6650                  | 7250 | 7850    | 8500 | 10350 |
|                       | 25 | 3560                           | 4080 | 4600 | 5120 | 5640                  | 6150 | 6700    | 7200 | 8800  |
|                       | 30 | 3340                           | 3840 | 4320 | 4820 | 5320                  | 5800 | 6300    | 6800 | 8250  |
|                       | 40 |                                |      | 3860 | 4300 | 4740                  | 5180 | 5620    | 6050 | 7400  |
|                       | 50 |                                |      |      |      | 4260                  | 4660 | 5060    | 5460 | 6650  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT BIAS



## AW

FOR GRASSLAND &  
ARABLE MACHINES

### FEATURES

Strong, flexible nylon carcass

Longitudinal tread profile

Genuine tread width

### BENEFITS






High load capacity at low inflation pressure

Good sideways stability

Reduced damage to the soil





| Ø     | Tyre size           | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|-------|---------------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 12    | 7.00 - 12 IMP       | 6 PR                | 2,5                              | 4.25  | 200  | 705  | 315  | 2050   | 194  |
|       | 10.0/80 - 12 IMP    | 116 A8              | 3,1                              | 7.00  | 265  | 725  | 330  | 2185   | 194  |
| 15.3  | 10.0/75 - 15.3 IMP  | 123 A8              | 3,9                              | 9.00  | 270  | 775  | 355  | 2335   | 195  |
|       | 10.0/75 - 15.3 IMP  | 130 A8              | 5,5                              | 9.00  | 270  | 775  | 355  | 2335   | 195  |
|       | 11.5/80 - 15.3 IMP  | 131 A8              | 3,4                              | 9.00  | 310  | 850  | 385  | 2560   | 196  |
|       | 11.5/80 - 15.3 IMP  | 139 A8              | 4,8                              | 9.00  | 310  | 850  | 385  | 2560   | 196  |
|       | 12.5/80 - 15.3 IMP  | 142 A8              | 4,3                              | 9.00  | 320  | 885  | 405  | 2660   | 197  |
| 16    | 13.0/75 - 16 IMP    | 135 A8              | 3,0                              | 11  | 345  | 905  | 405  | 2725   | 197  |
| 430.9 | 13.5/75 - 430.9 IMP | 145 A8              | 4,0                              | 11  | 360  | 960  | 435  | 2900   | 198  |
| 17    | 15.0/55 - 17 IMP    | 134 A8              | 2,6                              | 13.00   | 385  | 865  | 390  | 2580   | 198  |
|       | 19.0/45 - 17 IMP    | 138 A8              | 2,0                              | 16.00   | 455  | 870  | 400  | 2620   | 199  |
|       | 500/50 - 17 IMP     | 140 A8              | 2,0                              | 16.00   | 500  | 950  | 430  | 2890   | 199  |
| 18    | 12.5/80 - 18 IMP    | 142 A8              | 3,7                              | 11  | 340  | 975  | 450  | 2985   | 200  |
|       | 15.0/70 - 18 IMP    | 151 A8              | 4,3                              | 13  | 395  | 1000   | 460  | 3030   | 200  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



## 7.00 - 12 G PR IMP TT AW

|                       |               |     |                                |         |      |      |      |      |      |      |
|-----------------------|---------------|-----|--------------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692082238 |     | Section width                  | 200 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 2,5 bar       |     | Overall diameter               | 705 mm  |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |     | Static loaded radius           | 315 mm  |      |      |      |      |      |      |
| Recommended rim width | 4.25          |     | Rolling circumference          | 2050 mm |      |      |      |      |      |      |
| Permitted rim width   |               |     | Tread depth                    | 7 mm    |      |      |      |      |      |      |
| EAN Tube              | 8714692285370 |     |                                |         |      |      |      |      |      |      |
|                       |               |     | Tyre pressure (bar)            |         |      |      |      |      |      |      |
|                       |               |     | 1,00                           | 1,25    | 1,50 | 1,75 | 2,00 | 2,25 | 2,50 | 3,50 |
|                       |               |     | LLV Load capacity per tyre(kg) |         |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 560 | 640                            | 710     | 780  | 840  | 900  | 960  | 1170 |      |
|                       | 25            | 475 | 545                            | 605     | 660  | 715  | 765  | 815  | 995  |      |
|                       | 30            | 450 | 510                            | 570     | 625  | 675  | 720  | 765  | 935  |      |
|                       | 40            |     |                                | 510     | 555  | 600  | 645  | 685  | 835  |      |
|                       | 50            |     |                                |         | 500  | 540  | 580  | 615  | 750  |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 10.0/80 - 12 IMP 116 A8 TL AW

|                       |               |     |                                |         |      |      |      |      |      |      |      |      |
|-----------------------|---------------|-----|--------------------------------|---------|------|------|------|------|------|------|------|------|
| EAN                   | 8714692262883 |     | Section width                  | 265 mm  |      |      |      |      |      |      |      |      |
| Nominal tyre pressure | 3,1 bar       |     | Overall diameter               | 725 mm  |      |      |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |     | Static loaded radius           | 330 mm  |      |      |      |      |      |      |      |      |
| Recommended rim width | 7.00          |     | Rolling circumference          | 2185 mm |      |      |      |      |      |      |      |      |
| Permitted rim width   |               |     | Tread depth                    | 10 mm   |      |      |      |      |      |      |      |      |
| EAN Tube              | 8714692238994 |     |                                |         |      |      |      |      |      |      |      |      |
|                       |               |     | Tyre pressure (bar)            |         |      |      |      |      |      |      |      |      |
|                       |               |     | 1,00                           | 1,25    | 1,50 | 1,75 | 2,00 | 2,25 | 2,50 | 2,75 | 3,00 | 4,00 |
|                       |               |     | LLV Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 910 | 1040                           | 1160    | 1260 | 1370 | 1470 | 1560 | 1650 | 1730 | 2050 |      |
|                       | 25            | 775 | 885                            | 980     | 1070 | 1160 | 1250 | 1320 | 1400 | 1470 | 1740 |      |
|                       | 30            | 730 | 830                            | 925     | 1010 | 1090 | 1170 | 1250 | 1320 | 1390 | 1640 |      |
|                       | 40            |     |                                | 825     | 905  | 975  | 1050 | 1110 | 1180 | 1240 | 1470 |      |
|                       | 50            |     |                                |         | 815  | 880  | 940  | 1000 | 1060 | 1110 | 1320 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 10.0/75 - 15.3 IMP 123 A8 TL AW

|                       |    |                                |      |      |      |                       |      |         |      |     |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|-----|
| EAN                   |    | 8714692262876                  |      |      |      | Section width         |      | 270 mm  |      |     |
| Nominal tyre pressure |    | 3,9 bar                        |      |      |      | Overall diameter      |      | 775 mm  |      |     |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 355 mm  |      |     |
| Recommended rim width |    | 9.00                           |      |      |      | Rolling circumference |      | 2335 mm |      |     |
| Permitted rim width   |    |                                |      |      |      | Tread depth           |      | 8 mm    |      |     |
| EAN Tube              |    | 8714692239007                  |      |      |      |                       |      |         |      |     |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |     |
|                       |    | 1,00                           | 1,50 | 2,00 | 2,50 | 3,00                  | 3,50 | 4,00    | 5,25 |     |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      | HLV |
| Speed (km/h)          | 10 | 970                            | 1230 | 1460 | 1660 | 1850                  | 2020 | 2190    | 2560 |     |
|                       | 25 | 825                            | 1050 | 1240 | 1410 | 1570                  | 1720 | 1860    | 2180 |     |
|                       | 30 | 775                            | 985  | 1170 | 1330 | 1480                  | 1620 | 1750    | 2050 |     |
|                       | 40 |                                | 880  | 1040 | 1190 | 1320                  | 1440 | 1560    | 1830 |     |
|                       | 50 |                                |      | 935  | 1070 | 1190                  | 1300 | 1410    | 1650 |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 10.0/75 - 15.3 IMP 130 A8 TL AW

|                       |    |                                |      |      |      |                       |      |         |      |      |      |      |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|------|------|------|
| EAN                   |    | 8714692309823                  |      |      |      | Section width         |      | 270 mm  |      |      |      |      |
| Nominal tyre pressure |    | 5,5 bar                        |      |      |      | Overall diameter      |      | 775 mm  |      |      |      |      |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 355 mm  |      |      |      |      |
| Recommended rim width |    | 9.00                           |      |      |      | Rolling circumference |      | 2335 mm |      |      |      |      |
| Permitted rim width   |    |                                |      |      |      | Tread depth           |      | 8 mm    |      |      |      |      |
| EAN Tube              |    | 8714692239007                  |      |      |      |                       |      |         |      |      |      |      |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |      |      |      |
|                       |    | 1,00                           | 1,50 | 2,00 | 2,50 | 3,00                  | 3,50 | 4,00    | 4,50 | 5,00 | 5,50 | 7,50 |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      |      |      | HLV  |
| Speed (km/h)          | 10 | 990                            | 1250 | 1480 | 1690 | 1880                  | 2060 | 2220    | 2380 | 2530 | 2680 | 3220 |
|                       | 25 | 840                            | 1060 | 1260 | 1440 | 1600                  | 1750 | 1890    | 2020 | 2150 | 2280 | 2730 |
|                       | 30 | 790                            | 1000 | 1190 | 1350 | 1500                  | 1640 | 1780    | 1910 | 2030 | 2140 | 2570 |
|                       | 40 |                                |      | 1060 | 1210 | 1340                  | 1470 | 1590    | 1700 | 1810 | 1910 | 2290 |
|                       | 50 |                                |      |      | 1090 | 1210                  | 1320 | 1430    | 1530 | 1630 | 1720 | 2060 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 11.5/80 - 15.3 IMP 131 A8 TL AW

|                       |               |      |                            |         |      |      |      |      |      |      |      |      |      |      |     |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|------|------|------|------|-----|
| EAN                   | 8714692263187 |      | Section width              | 310 mm  |      |      |      |      |      |      |      |      |      |      |     |
| Nominal tyre pressure | 3,4 bar       |      | Overall diameter           | 850 mm  |      |      |      |      |      |      |      |      |      |      |     |
| Tyre construction     | Diagonaal     |      | Static loaded radius       | 385 mm  |      |      |      |      |      |      |      |      |      |      |     |
| Recommended rim width | 9.00          |      | Rolling circumference      | 2560 mm |      |      |      |      |      |      |      |      |      |      |     |
| Permitted rim width   |               |      | Tread depth                | 10 mm   |      |      |      |      |      |      |      |      |      |      |     |
| EAN Tube              | 8714692239014 |      |                            |         |      |      |      |      |      |      |      |      |      |      |     |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |      |      |      |     |
|                       |               |      | 1,00                       | 1,25    | 1,50 | 1,75 | 2,00 | 2,25 | 2,50 | 2,75 | 3,00 | 3,25 | 3,50 | 4,75 |     |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |      |      |     |
|                       |               |      | LLV                        |         |      |      |      |      |      |      |      |      |      |      | HLV |
| Speed (km/h)          | 10            | 1330 | 1510                       | 1680    | 1840 | 1990 | 2130 | 2270 | 2400 | 2530 | 2650 | 2760 | 3300 |      |     |
|                       | 25            | 1130 | 1290                       | 1430    | 1570 | 1690 | 1810 | 1930 | 2040 | 2150 | 2250 | 2350 | 2810 |      |     |
|                       | 30            | 1060 | 1210                       | 1350    | 1470 | 1590 | 1710 | 1820 | 1920 | 2020 | 2120 | 2210 | 2640 |      |     |
|                       | 40            |      |                            | 1200    | 1320 | 1420 | 1520 | 1620 | 1710 | 1800 | 1890 | 1970 | 2360 |      |     |
|                       | 50            |      |                            |         | 1180 | 1280 | 1370 | 1460 | 1540 | 1620 | 1700 | 1780 | 2120 |      |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 11.5/80 - 15.3 IMP 139 A8 TL AW

|                       |               |      |                            |         |      |      |      |      |      |      |      |      |  |  |     |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|------|------|--|--|-----|
| EAN                   | 8714692309847 |      | Section width              | 310 mm  |      |      |      |      |      |      |      |      |  |  |     |
| Nominal tyre pressure | 4,8 bar       |      | Overall diameter           | 850 mm  |      |      |      |      |      |      |      |      |  |  |     |
| Tyre construction     | Diagonaal     |      | Static loaded radius       | 385 mm  |      |      |      |      |      |      |      |      |  |  |     |
| Recommended rim width | 9.00          |      | Rolling circumference      | 2560 mm |      |      |      |      |      |      |      |      |  |  |     |
| Permitted rim width   |               |      | Tread depth                | 10 mm   |      |      |      |      |      |      |      |      |  |  |     |
| EAN Tube              | 8714692239014 |      |                            |         |      |      |      |      |      |      |      |      |  |  |     |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |      |      |  |  |     |
|                       |               |      | 1,00                       | 1,50    | 2,00 | 2,50 | 3,00 | 3,50 | 4,00 | 4,50 | 5,00 | 6,50 |  |  |     |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      |      |      |      |  |  |     |
|                       |               |      | LLV                        |         |      |      |      |      |      |      |      |      |  |  | HLV |
| Speed (km/h)          | 10            | 1380 | 1750                       | 2070    | 2360 | 2630 | 2870 | 3100 | 3320 | 3540 | 4120 |      |  |  |     |
|                       | 25            | 1170 | 1490                       | 1760    | 2010 | 2230 | 2440 | 2640 | 2830 | 3000 | 3500 |      |  |  |     |
|                       | 30            | 1100 | 1400                       | 1660    | 1890 | 2100 | 2300 | 2490 | 2660 | 2830 | 3300 |      |  |  |     |
|                       | 40            |      |                            | 1480    | 1690 | 1880 | 2050 | 2220 | 2380 | 2530 | 2950 |      |  |  |     |
|                       | 50            |      |                            |         | 1520 | 1690 | 1850 | 2000 | 2140 | 2280 | 2650 |      |  |  |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 12.5/80 - 15.3 IMP 142 A8 TL AW SPECIAL

|                       |    |                                |      |      |      |      |                       |      |         |      |     |
|-----------------------|----|--------------------------------|------|------|------|------|-----------------------|------|---------|------|-----|
| EAN                   |    | 8714692263255                  |      |      |      |      | Section width         |      | 320 mm  |      |     |
| Nominal tyre pressure |    | 4,3 bar                        |      |      |      |      | Overall diameter      |      | 885 mm  |      |     |
| Tyre construction     |    | Diagonaal                      |      |      |      |      | Static loaded radius  |      | 405 mm  |      |     |
| Recommended rim width |    | 9.00                           |      |      |      |      | Rolling circumference |      | 2660 mm |      |     |
| Permitted rim width   |    |                                |      |      |      |      | Tread depth           |      | 11 mm   |      |     |
| EAN Tube              |    | 8714692239021                  |      |      |      |      |                       |      |         |      |     |
|                       |    | Tyre pressure (bar)            |      |      |      |      |                       |      |         |      |     |
|                       |    | 1,00                           | 1,50 | 2,00 | 2,50 | 3,00 | 3,50                  | 4,00 | 4,25    | 5,75 |     |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |      |                       |      |         |      | HLV |
| Speed (km/h)          | 10 | 1570                           | 1980 | 2350 | 2680 | 2980 | 3260                  | 3520 | 3640    | 4360 |     |
|                       | 25 | 1330                           | 1690 | 2000 | 2270 | 2530 | 2770                  | 2990 | 3100    | 3700 |     |
|                       | 30 | 1250                           | 1590 | 1880 | 2140 | 2380 | 2610                  | 2820 | 2920    | 3480 |     |
|                       | 40 |                                | 1420 | 1680 | 1910 | 2130 | 2330                  | 2520 | 2610    | 3120 |     |
|                       | 50 |                                |      | 1510 | 1720 | 1910 | 2090                  | 2260 | 2350    | 2800 |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 13.0/75 - 16 IMP 135 A8 TL AW

|                       |    |                                |      |      |      |      |                       |      |         |      |      |
|-----------------------|----|--------------------------------|------|------|------|------|-----------------------|------|---------|------|------|
| EAN                   |    | 8714692263279                  |      |      |      |      | Section width         |      | 345 mm  |      |      |
| Nominal tyre pressure |    | 3,0 bar                        |      |      |      |      | Overall diameter      |      | 905 mm  |      |      |
| Tyre construction     |    | Diagonaal                      |      |      |      |      | Static loaded radius  |      | 405 mm  |      |      |
| Recommended rim width |    | 11                             |      |      |      |      | Rolling circumference |      | 2725 mm |      |      |
| Permitted rim width   |    |                                |      |      |      |      | Tread depth           |      | 12 mm   |      |      |
| EAN Tube              |    | 8714692239045                  |      |      |      |      |                       |      |         |      |      |
|                       |    | Tyre pressure (bar)            |      |      |      |      |                       |      |         |      |      |
|                       |    | 1,00                           | 1,25 | 1,50 | 1,75 | 2,00 | 2,25                  | 2,50 | 2,75    | 3,00 | 4,00 |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |      |                       |      |         |      | HLV  |
| Speed (km/h)          | 10 | 1630                           | 1860 | 2070 | 2260 | 2450 | 2620                  | 2790 | 2950    | 3100 | 3680 |
|                       | 25 | 1390                           | 1580 | 1760 | 1920 | 2080 | 2230                  | 2370 | 2510    | 2640 | 3120 |
|                       | 30 | 1300                           | 1490 | 1650 | 1810 | 1960 | 2100                  | 2230 | 2360    | 2480 | 2940 |
|                       | 40 |                                |      | 1480 | 1620 | 1750 | 1870                  | 1990 | 2110    | 2220 | 2620 |
|                       | 50 |                                |      |      | 1450 | 1570 | 1690                  | 1790 | 1890    | 1990 | 2360 |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 13.5/75 - 430.9 IMP 145 A8 TL AW SPECIAL

|                       |               |      |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692263286 |      | Section width              | 360 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 4,0 bar       |      | Overall diameter           | 960 mm  |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |      | Static loaded radius       | 435 mm  |      |      |      |      |      |      |
| Recommended rim width | 11            |      | Rolling circumference      | 2900 mm |      |      |      |      |      |      |
| Permitted rim width   |               |      | Tread depth                | 12 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692239052 |      |                            |         |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               |      | 1,00                       | 1,50    | 2,00 | 2,50 | 3,00 | 3,50 | 4,00 | 5,50 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      | HLV  |
| Speed (km/h)          | 10            | 1800 | 2290                       | 2710    | 3080 | 3440 | 3760 | 4060 | 4900 |      |
|                       | 25            | 1530 | 1940                       | 2300    | 2620 | 2920 | 3200 | 3460 | 4160 |      |
|                       | 30            | 1440 | 1830                       | 2170    | 2470 | 2750 | 3000 | 3240 | 3920 |      |
|                       | 40            |      | 1630                       | 1930    | 2200 | 2450 | 2680 | 2900 | 3500 |      |
|                       | 50            |      |                            | 1740    | 1980 | 2210 | 2410 | 2610 | 3140 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 15.0/55 - 17 IMP 134 A8 TL AW

|                       |               |      |                            |         |      |      |      |      |      |      |
|-----------------------|---------------|------|----------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692263293 |      | Section width              | 385 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 2,6 bar       |      | Overall diameter           | 865 mm  |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |      | Static loaded radius       | 390 mm  |      |      |      |      |      |      |
| Recommended rim width | 13.00         |      | Rolling circumference      | 2580 mm |      |      |      |      |      |      |
| Permitted rim width   |               |      | Tread depth                | 12 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692239069 |      |                            |         |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)        |         |      |      |      |      |      |      |
|                       |               |      | 1,00                       | 1,25    | 1,50 | 1,75 | 2,00 | 2,25 | 2,50 | 3,50 |
|                       |               |      | Load capacity per tyre(kg) |         |      |      |      |      |      | HLV  |
| Speed (km/h)          | 10            | 1650 | 1880                       | 2090    | 2290 | 2480 | 2650 | 2820 | 3440 |      |
|                       | 25            | 1400 | 1600                       | 1780    | 1950 | 2100 | 2250 | 2400 | 2920 |      |
|                       | 30            | 1320 | 1500                       | 1670    | 1830 | 1980 | 2120 | 2260 | 2750 |      |
|                       | 40            |      |                            | 1490    | 1640 | 1770 | 1890 | 2010 | 2450 |      |
|                       | 50            |      |                            |         | 1470 | 1590 | 1710 | 1810 | 2210 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

| 19.0/45 - 17 IMP 138 A8 TL AW |    |                            |      |      |                       |      |         |
|-------------------------------|----|----------------------------|------|------|-----------------------|------|---------|
| EAN                           |    | 8714692263316              |      |      | Section width         |      | 455 mm  |
| Nominal tyre pressure         |    | 2,0 bar                    |      |      | Overall diameter      |      | 870 mm  |
| Tyre construction             |    | Diagonaal                  |      |      | Static loaded radius  |      | 400 mm  |
| Recommended rim width         |    | 16.00                      |      |      | Rolling circumference |      | 2620 mm |
| Permitted rim width           |    |                            |      |      | Tread depth           |      | 12 mm   |
| EAN Tube                      |    | 8714692239076              |      |      |                       |      |         |
|                               |    | Tyre pressure (bar)        |      |      |                       |      |         |
|                               |    | 1,00                       | 1,25 | 1,50 | 1,75                  | 2,00 | 2,75    |
|                               |    | LLV                        |      |      |                       |      | HLV     |
|                               |    | Load capacity per tyre(kg) |      |      |                       |      |         |
| Speed (km/h)                  | 10 | 2210                       | 2520 | 2810 | 3080                  | 3320 | 4000    |
|                               | 25 | 1880                       | 2140 | 2390 | 2610                  | 2820 | 3400    |
|                               | 30 | 1770                       | 2020 | 2250 | 2460                  | 2660 | 3200    |
|                               | 40 |                            |      | 2000 | 2190                  | 2370 | 2860    |
|                               | 50 |                            |      |      | 1970                  | 2140 | 2570    |

For the explanation of the symbols and abbreviations, see the inside of the last page.

| 500/50 - 17 IMP 140 A8 TL AW |    |                            |      |      |                       |      |         |
|------------------------------|----|----------------------------|------|------|-----------------------|------|---------|
| EAN                          |    | 8714692263323              |      |      | Section width         |      | 500 mm  |
| Nominal tyre pressure        |    | 2,0 bar                    |      |      | Overall diameter      |      | 950 mm  |
| Tyre construction            |    | Diagonaal                  |      |      | Static loaded radius  |      | 430 mm  |
| Recommended rim width        |    | 16.00                      |      |      | Rolling circumference |      | 2890 mm |
| Permitted rim width          |    |                            |      |      | Tread depth           |      | 12 mm   |
| EAN Tube                     |    | 8714692239083              |      |      |                       |      |         |
|                              |    | Tyre pressure (bar)        |      |      |                       |      |         |
|                              |    | 1,00                       | 1,25 | 1,50 | 1,75                  | 2,00 | 2,50    |
|                              |    | LLV                        |      |      |                       |      | HLV     |
|                              |    | Load capacity per tyre(kg) |      |      |                       |      |         |
| Speed (km/h)                 | 10 | 2150                       | 2490 | 2830 | 3160                  | 3500 | 4180    |
|                              | 25 | 1830                       | 2120 | 2400 | 2690                  | 2980 | 3540    |
|                              | 30 | 1720                       | 1990 | 2260 | 2530                  | 2800 | 3340    |
|                              | 40 |                            |      | 2020 | 2260                  | 2500 | 2980    |
|                              | 50 |                            |      |      |                       | 2250 | 2680    |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 12.5/80 - 18 IMP 142 A8 TL AW

|                       |               |      |                                    |         |      |      |      |      |      |      |
|-----------------------|---------------|------|------------------------------------|---------|------|------|------|------|------|------|
| EAN                   | 8714692263262 |      | Section width                      | 340 mm  |      |      |      |      |      |      |
| Nominal tyre pressure | 3,7 bar       |      | Overall diameter                   | 975 mm  |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |      | Static loaded radius               | 450 mm  |      |      |      |      |      |      |
| Recommended rim width | 11            |      | Rolling circumference              | 2985 mm |      |      |      |      |      |      |
| Permitted rim width   |               |      | Tread depth                        | 11 mm   |      |      |      |      |      |      |
| EAN Tube              | 8714692239090 |      |                                    |         |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)                |         |      |      |      |      |      |      |
|                       |               |      | 1,00                               | 1,50    | 2,00 | 2,50 | 3,00 | 3,50 | 3,75 | 5,00 |
|                       |               |      | LLV Load capacity per tyre(kg) HLV |         |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 1760 | 2230                               | 2640    | 3000 | 3340 | 3660 | 3820 | 4520 |      |
|                       | 25            | 1500 | 1900                               | 2240    | 2560 | 2840 | 3120 | 3240 | 3840 |      |
|                       | 30            | 1410 | 1780                               | 2110    | 2410 | 2680 | 2930 | 3060 | 3600 |      |
|                       | 40            |      | 1590                               | 1890    | 2150 | 2390 | 2620 | 2720 | 3220 |      |
|                       | 50            |      |                                    | 1700    | 1930 | 2150 | 2350 | 2450 | 2900 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 15.0/70 - 18 IMP 151 A8 TL AW

|                       |               |      |                                    |         |      |      |      |      |      |      |      |
|-----------------------|---------------|------|------------------------------------|---------|------|------|------|------|------|------|------|
| EAN                   | 8714692263309 |      | Section width                      | 395 mm  |      |      |      |      |      |      |      |
| Nominal tyre pressure | 4,3 bar       |      | Overall diameter                   | 1000 mm |      |      |      |      |      |      |      |
| Tyre construction     | Diagonaal     |      | Static loaded radius               | 460 mm  |      |      |      |      |      |      |      |
| Recommended rim width | 13            |      | Rolling circumference              | 3030 mm |      |      |      |      |      |      |      |
| Permitted rim width   |               |      | Tread depth                        | 13 mm   |      |      |      |      |      |      |      |
| EAN Tube              | 8714692239106 |      |                                    |         |      |      |      |      |      |      |      |
|                       |               |      | Tyre pressure (bar)                |         |      |      |      |      |      |      |      |
|                       |               |      | 1,00                               | 1,50    | 2,00 | 2,50 | 3,00 | 3,50 | 4,00 | 4,25 | 5,75 |
|                       |               |      | LLV Load capacity per tyre(kg) HLV |         |      |      |      |      |      |      |      |
| Speed (km/h)          | 10            | 2090 | 2650                               | 3140    | 3560 | 3980 | 4340 | 4700 | 4860 | 5820 |      |
|                       | 25            | 1780 | 2250                               | 2660    | 3040 | 3380 | 3700 | 4000 | 4140 | 4940 |      |
|                       | 30            | 1670 | 2120                               | 2510    | 2860 | 3180 | 3480 | 3760 | 3900 | 4640 |      |
|                       | 40            |      | 1890                               | 2240    | 2550 | 2840 | 3100 | 3360 | 3480 | 4160 |      |
|                       | 50            |      |                                    | 2010    | 2290 | 2550 | 2790 | 3020 | 3140 | 3740 |      |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# IMPLEMENT — BIAS



# IMPLEMENT BIAS



## AS+

COMFORT AND TRACTION ASSURED

---

### FEATURES

Sturdy diagonal carcass construction

Special tread






Large cleat surface

### BENEFITS

Excellent stability and high load capacity

High traction power

Long lifespan

| Ø    | Tyre size          | Service description | Service description |  |  mm |  mm |  mm |  mm | Pag. |
|------|--------------------|---------------------|---------------------|---|--|--|--|--|------|
| 12   | 7.00 - 12 IMP      | 95 A8               | 2,5                 | 4.25  | 190  | 690  | 325  | 2100   | 204  |
| 15.3 | 10.0/75 - 15.3 IMP | 123 A8              | 3,9                 | 9.00  | 270  | 790  | 365  | 2420   | 204  |
|      | 11.5/80 - 15.3 IMP | 135 A8              | 4,1                 | 9.00  | 305  | 890  | 400  | 2695   | 205  |
| 17   | 15.0/55 - 17 IMP   | 134 A8              | 2,6                 | 13.00   | 370  | 890  | 400  | 2680   | 205  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



## 7.00 - 12 6 PR IMP 95 A8 TL AS+

|                       |               |                                |                       |         |      |      |      |      |      |  |
|-----------------------|---------------|--------------------------------|-----------------------|---------|------|------|------|------|------|--|
| EAN                   | 8714692909504 |                                | Section width         | 190 mm  |      |      |      |      |      |  |
| Nominal tyre pressure | 2,5 bar       |                                | Overall diameter      | 690 mm  |      |      |      |      |      |  |
| Tyre construction     | Diagonaal     |                                | Static loaded radius  | 325 mm  |      |      |      |      |      |  |
| Recommended rim width | 4.25          |                                | Rolling circumference | 2100 mm |      |      |      |      |      |  |
| Permitted rim width   |               |                                | Tread depth           | 17 mm   |      |      |      |      |      |  |
| EAN Tube              | 8714692238987 |                                |                       |         |      |      |      |      |      |  |
|                       |               | Tyre pressure (bar)            |                       |         |      |      |      |      |      |  |
|                       |               | 1,00                           | 1,25                  | 1,50    | 1,75 | 2,00 | 2,25 | 2,50 | 3,50 |  |
|                       |               | LLV Load capacity per tyre(kg) |                       |         |      |      |      |      | HLV  |  |
| Speed (km/h)          | 10            | 560                            | 640                   | 710     | 780  | 840  | 900  | 960  | 1170 |  |
|                       | 25            | 475                            | 545                   | 605     | 660  | 715  | 765  | 815  | 995  |  |
|                       | 30            | 450                            | 510                   | 570     | 625  | 675  | 720  | 765  | 935  |  |
|                       | 40            |                                |                       | 510     | 555  | 600  | 645  | 685  | 835  |  |
|                       | 50            |                                |                       |         | 500  | 540  | 580  | 615  | 750  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 10.0/75 - 15.3 10 PR IMP 123 A8 TL AS+

|                       |               |                                |                       |         |      |      |      |      |      |  |
|-----------------------|---------------|--------------------------------|-----------------------|---------|------|------|------|------|------|--|
| EAN                   | 8714692909511 |                                | Section width         | 270 mm  |      |      |      |      |      |  |
| Nominal tyre pressure | 3,9 bar       |                                | Overall diameter      | 790 mm  |      |      |      |      |      |  |
| Tyre construction     | Diagonaal     |                                | Static loaded radius  | 365 mm  |      |      |      |      |      |  |
| Recommended rim width | 9.00          |                                | Rolling circumference | 2420 mm |      |      |      |      |      |  |
| Permitted rim width   |               |                                | Tread depth           | 22 mm   |      |      |      |      |      |  |
| EAN Tube              | 8714692239007 |                                |                       |         |      |      |      |      |      |  |
|                       |               | Tyre pressure (bar)            |                       |         |      |      |      |      |      |  |
|                       |               | 1,00                           | 1,50                  | 2,00    | 2,50 | 3,00 | 3,50 | 4,00 | 5,25 |  |
|                       |               | LLV Load capacity per tyre(kg) |                       |         |      |      |      |      | HLV  |  |
| Speed (km/h)          | 10            | 970                            | 1230                  | 1460    | 1660 | 1850 | 2020 | 2190 | 2560 |  |
|                       | 25            | 825                            | 1050                  | 1240    | 1410 | 1570 | 1720 | 1860 | 2180 |  |
|                       | 30            | 775                            | 985                   | 1170    | 1330 | 1480 | 1620 | 1750 | 2050 |  |
|                       | 40            |                                | 880                   | 1040    | 1190 | 1320 | 1440 | 1560 | 1830 |  |
|                       | 50            |                                |                       | 935     | 1070 | 1190 | 1300 | 1410 | 1650 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 11.5/80 - 15.3 12 PR IMP 135 A8 TL AS+

|                       |    |                                |      |      |      |                       |      |         |      |     |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|-----|
| EAN                   |    | 8714692909528                  |      |      |      | Section width         |      | 305 mm  |      |     |
| Nominal tyre pressure |    | 4,1 bar                        |      |      |      | Overall diameter      |      | 890 mm  |      |     |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 400 mm  |      |     |
| Recommended rim width |    | 9.00                           |      |      |      | Rolling circumference |      | 2695 mm |      |     |
| Permitted rim width   |    |                                |      |      |      | Tread depth           |      | 22 mm   |      |     |
| EAN Tube              |    | 8714692239014                  |      |      |      |                       |      |         |      |     |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |     |
|                       |    | 1,00                           | 1,50 | 2,00 | 2,50 | 3,00                  | 3,50 | 4,00    | 5,50 |     |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      | HLV |
| Speed (km/h)          | 10 | 1350                           | 1710 | 2030 | 2310 | 2570                  | 2810 | 3040    | 3660 |     |
|                       | 25 | 1150                           | 1460 | 1720 | 1960 | 2180                  | 2390 | 2580    | 3120 |     |
|                       | 30 | 1080                           | 1370 | 1620 | 1850 | 2050                  | 2250 | 2430    | 2930 |     |
|                       | 40 |                                | 1220 | 1450 | 1650 | 1830                  | 2010 | 2170    | 2620 |     |
|                       | 50 |                                |      | 1300 | 1480 | 1650                  | 1810 | 1950    | 2350 |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 15.0/55-17 10 PR IMP 134 A8 TL AS+

|                       |    |                                |      |      |      |                       |      |         |      |     |
|-----------------------|----|--------------------------------|------|------|------|-----------------------|------|---------|------|-----|
| EAN                   |    | 8714692909535                  |      |      |      | Section width         |      | 370 mm  |      |     |
| Nominal tyre pressure |    | 2,6 bar                        |      |      |      | Overall diameter      |      | 890 mm  |      |     |
| Tyre construction     |    | Diagonaal                      |      |      |      | Static loaded radius  |      | 400 mm  |      |     |
| Recommended rim width |    | 13.00                          |      |      |      | Rolling circumference |      | 2680 mm |      |     |
| Permitted rim width   |    |                                |      |      |      | Tread depth           |      | 22 mm   |      |     |
| EAN Tube              |    | 8714692239069                  |      |      |      |                       |      |         |      |     |
|                       |    | Tyre pressure (bar)            |      |      |      |                       |      |         |      |     |
|                       |    | 1,00                           | 1,25 | 1,50 | 1,75 | 2,00                  | 2,25 | 2,50    | 3,50 |     |
|                       |    | LLV Load capacity per tyre(kg) |      |      |      |                       |      |         |      | HLV |
| Speed (km/h)          | 10 | 1650                           | 1880 | 2090 | 2290 | 2480                  | 2650 | 2820    | 3440 |     |
|                       | 25 | 1400                           | 1600 | 1780 | 1950 | 2100                  | 2250 | 2400    | 2920 |     |
|                       | 30 | 1320                           | 1500 | 1670 | 1830 | 1980                  | 2120 | 2260    | 2750 |     |
|                       | 40 |                                |      | 1490 | 1640 | 1770                  | 1890 | 2010    | 2450 |     |
|                       | 50 |                                |      |      | 1470 | 1590                  | 1710 | 1810    | 2210 |     |

For the explanation of the symbols and abbreviations, see the inside of the last page.

# IMPLEMENT BIAS



## V61






FOR PROFESSIONAL  
CULTIVATION MACHINERY

### FEATURES

- Robust tread
- Strong nylon carcass
- Tubeless

### BENEFITS

- Highly resistant to punctures
- Long lifespan
- Easy to fit

| Ø    | Tyre size         | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|------|-------------------|---------------------|----------------------------------|---|--|--|--|--|------|
| 14.5 | 200/60 - 14.5 IMP | 106 A8              | 5,0                              | AG 6.75   | 210  | 615  | 295  | 1880   | 207  |
|      | 250/65 - 14.5 IMP | 121 A8              | 3,6                              | AG 8.00   | 245  | 680  | 320  | 2060   | 207  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 200/60 - 14.5 IMP 106 A8 TL V61

|                       |    |                                    |      |      |      |      |                       |      |         |      |      |  |
|-----------------------|----|------------------------------------|------|------|------|------|-----------------------|------|---------|------|------|--|
| EAN                   |    | 8714692105890                      |      |      |      |      | Section width         |      | 210 mm  |      |      |  |
| Nominal tyre pressure |    | 5,0 bar                            |      |      |      |      | Overall diameter      |      | 615 mm  |      |      |  |
| Tyre construction     |    | Diagonaal                          |      |      |      |      | Static loaded radius  |      | 295 mm  |      |      |  |
| Recommended rim width |    | AG 6.75                            |      |      |      |      | Rolling circumference |      | 1880 mm |      |      |  |
| EAN Tube              |    | 8714692238970                      |      |      |      |      | Tread depth           |      | 9 mm    |      |      |  |
|                       |    | Tyre pressure (bar)                |      |      |      |      |                       |      |         |      |      |  |
|                       |    | 1,00                               | 1,50 | 2,00 | 2,50 | 3,00 | 3,50                  | 4,00 | 4,50    | 5,00 | 6,00 |  |
|                       |    | LLV Load capacity per tyre(kg) HLV |      |      |      |      |                       |      |         |      |      |  |
| Speed (km/h)          | 10 | 385                                | 510  | 630  | 750  | 870  | 990                   | 1110 | 1230    | 1350 | 1600 |  |
|                       | 25 | 330                                | 430  | 535  | 635  | 740  | 845                   | 945  | 1050    | 1150 | 1360 |  |
|                       | 30 | 310                                | 405  | 505  | 600  | 695  | 795                   | 890  | 985     | 1080 | 1280 |  |
|                       | 40 |                                    | 365  | 450  | 535  | 620  | 710                   | 795  | 880     | 970  | 1140 |  |
|                       | 50 |                                    |      | 405  | 480  | 560  | 640                   | 715  | 795     | 870  | 1030 |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 250/65 - 14.5 IMP 121 A8 TL V61

|                       |    |                                    |      |      |      |      |                       |      |         |      |  |  |
|-----------------------|----|------------------------------------|------|------|------|------|-----------------------|------|---------|------|--|--|
| EAN                   |    | 8714692220449                      |      |      |      |      | Section width         |      | 245 mm  |      |  |  |
| Nominal tyre pressure |    | 3,6 bar                            |      |      |      |      | Overall diameter      |      | 680 mm  |      |  |  |
| Tyre construction     |    | Diagonaal                          |      |      |      |      | Static loaded radius  |      | 320 mm  |      |  |  |
| Recommended rim width |    | AG 8.00                            |      |      |      |      | Rolling circumference |      | 2060 mm |      |  |  |
| EAN Tube              |    | 8714692238970                      |      |      |      |      | Tread depth           |      | 9 mm    |      |  |  |
|                       |    | Tyre pressure (bar)                |      |      |      |      |                       |      |         |      |  |  |
|                       |    | 1,00                               | 1,40 | 1,80 | 2,20 | 2,60 | 3,00                  | 3,40 | 3,60    | 4,40 |  |  |
|                       |    | LLV Load capacity per tyre(kg) HLV |      |      |      |      |                       |      |         |      |  |  |
| Speed (km/h)          | 10 | 710                                | 915  | 1120 | 1320 | 1520 | 1730                  | 1930 | 2030    | 2440 |  |  |
|                       | 25 | 605                                | 775  | 950  | 1120 | 1290 | 1470                  | 1640 | 1730    | 2070 |  |  |
|                       | 30 | 570                                | 730  | 895  | 1060 | 1220 | 1380                  | 1540 | 1620    | 1950 |  |  |
|                       | 40 |                                    | 650  | 795  | 940  | 1090 | 1230                  | 1380 | 1450    | 1740 |  |  |
|                       | 50 |                                    |      | 720  | 850  | 980  | 1110                  | 1240 | 1300    | 1570 |  |  |

For the explanation of the symbols and abbreviations, see the inside of the last page.







# SMALL TYRES

## AGRICULTURAL

Pag.

|      |     |
|------|-----|
| V50  | 210 |
| V60  | 211 |
| V61  | 211 |
| V64  | 212 |
| V64+ | 212 |
| V67  | 212 |

## LAWN- AND LANDSCAPE

|           |     |
|-----------|-----|
| Greentrac | 220 |
| V71       | 221 |
| V88       | 221 |

## UTILITY

|     |     |
|-----|-----|
| V20 | 226 |
| V25 | 226 |
| V40 | 227 |
| V52 | 227 |
| V76 | 228 |

## FAST TRAILER

|     |     |
|-----|-----|
| V47 | 234 |
| V48 | 234 |
| V49 | 235 |
| V54 | 235 |
| V71 | 236 |
| V90 | 236 |



# SMALL TYRES - AGRICULTURAL



## V50

DESIGNED AS FURROW  
WHEEL ON PLOUGHS

### FEATURES

- Smooth tread
- Available in high ply rating
- Smooth sidewall

### BENEFITS

- Tyre never becomes clogged
- Suitable for heavy applications
- Shakes off clinging soil



# – SMALL TYRES AGRICULTURAL



## V60

THE TYRE FOR GRASSLAND  
& HORTICULTURE

### FEATURES

- Wide lateral grooves
- Rounded contour
- Sturdy carcass

### BENEFITS

- Good sideways stability
- Prevents damage to the turf
- Long lifespan



## V61

FOR PROFESSIONAL  
CULTIVATION MACHINERY

### FEATURES

- Robust tread
- Strong nylon carcass
- Tubeless

### BENEFITS

- Highly resistant to punctures
- Long lifespan
- Easy to fit



# SMALL TYRES - AGRICULTURAL



## V64/V64+

THE STANDARD FOR  
EFFICIENT HAY MAKING

### FEATURES

- Extra thick tread
- Rounded shoulders
- Wide tread & flat contour

### BENEFITS

- Puncture resistant and long lifespan
- Prevents damage to the turf
- Minimal rutting



## V67

THE IDEAL TRACTION TYRE FOR  
MARKET GARDENING

### FEATURES

- Traction tread with narrow cleats
- Special shape of the cleats
- Drive/non drive load indication

### BENEFITS

- Excellent grip
- Perfect self-cleaning
- Load capacity for every application

# - SMALL TYRES AGRICULTURAL

| Profil | Tyre size    | PR | Service description | Nominal inflation pressure (bar) |  |  mm |  mm | Pag. |
|--------|--------------|----|---------------------|----------------------------------|---|--|--|------|
| V50    | 5.00 - 8     | 10 | 66 A6               | 6,0                              | 3.00D   | 130  | 455  | 214  |
| V50    | 6.00 - 9     | 10 | 94 A6               | 5,0                              | 4.00 E  | 165  | 445  | 214  |
| V60    | 3.00 - 4     | 4  | 30 A6               | 3,5                              | 2.10  | 90   | 275  | 214  |
| V60    | 4.00 - 4     | 4  | 43 A6               | 2,8                              | 2.10  | 100  | 315  | 214  |
| V60    | 3.50 - 6     | 4  | 45 A6               | 3,0                              | 2.50A   | 100  | 355  | 214  |
| V60    | 3.50 - 8     | 4  | 52 A6               | 3,0                              | 2.50A   | 100  | 395  | 215  |
| V60    | 4.00 - 8     | 4  | 57 A6               | 2,8                              | 2.50A   | 105  | 425  | 215  |
| V61    | 15x 6.00 - 6 | 4  | 61 A6               | 2,5                              | 4.50A   | 160  | 380  | 215  |
| V61    | 170/60 - 8   | 6  | 71 A6               | 3,0                              | 5.50 A  | 170  | 425  | 215  |
| V61    | 18x 8.50 - 8 | 4  | 77 A6               | 2,0                              | 7.00 I  | 210  | 465  | 215  |
| V61    | 18x 8.50 - 8 | 6  | 85 A6               | 3,0                              | 7.00 I  | 210  | 465  | 216  |
| V64    | 3.50 - 6     | 4  | 45 A6               | 3,0                              | 2.50A   | 100  | 355  | 216  |
| V64+   | 160/65 - 6   |    | 60 A8               | 2,4                              | 4.50A   | 160  | 365  | 216  |
| V64+   | 160/65 - 6   |    | 66 A8               | 3,2                              | 4.50A   | 160  | 365  | 216  |
| V64    | 3.50 - 8     | 4  | 52 A6               | 3,0                              | 2.50A   | 100  | 395  | 216  |
| V64+   | 170/60 - 8   |    | 65 A8               | 2,4                              | 5.50 A  | 170  | 410  | 217  |
| V64+   | 170/60 - 8   |    | 71 A8               | 3,2                              | 5.50 A  | 170  | 410  | 217  |
| V64+   | 210/60 - 8   |    | 83 A8               | 3,2                              | 7.00 I  | 215  | 455  | 217  |
| V67    | 3.00 - 4     | 4  | 30 A6               | 3,5                              | 2.10  | 90   | 275  | 217  |
| V67    | 4.00 - 4     | 4  | 43 A6               | 5,0                              | 2.50 C x 4  | 110  | 305  | 217  |
| V67    | 3.50 - 6     | 4  | 45 A6               | 3,0                              | 2.50A   | 100  | 355  | 218  |
| V67    | 3.50 - 8     | 4  | 52 A6               | 3,0                              | 2.50A   | 100  | 395  | 218  |
| V67    | 4.00 - 8     | 4  | 57 A6               | 2,8                              | 2.50A   | 105  | 425  | 218  |
| V67    | 4.00 - 12    | 4  | 66 A6               | 2,75                             | 3.00 D  | 110  | 515  | 218  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# SMALL TYRES - AGRICULTURAL

## 5.00 - 8 10 PR 66 A6 TT V50

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081989 | Section width            | 130 mm        |
| Nominal tyre pressure | 6,0 bar       | Overall diameter         | 455 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 390 kg        |
| Recommended rim width | 3.00D         | Load capacity at 30 km/h | 300 kg        |
| Permitted rim width   | 3.50D         | Load capacity at 40 km/h | 270 kg        |
|                       |               | EAN Tube                 | 8714692285288 |

## 6.00 - 9 10 PR 94 A6 TT V50

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082177 | Section width            | 165 mm        |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 540 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 865 kg        |
| Recommended rim width | 4.00E         | Load capacity at 30 km/h | 670 kg        |
| Permitted rim width   | 3.50D         | Load capacity at 40 km/h | 605 kg        |
|                       |               | EAN Tube                 | 8714692285325 |

## 3.00 - 4 4 PR 30 A6 TT V60

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081675 | Section width            | 90 mm         |
| Nominal tyre pressure | 3,5 bar       | Overall diameter         | 275 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 135 kg        |
| Recommended rim width | 2.10          | Load capacity at 30 km/h | 105 kg        |
| Permitted rim width   | 2.50C         | Load capacity at 40 km/h | 95 kg         |
|                       |               | EAN Tube                 | 8714692285202 |

## 4.00 - 4 4 PR 43 A6 TT V60

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082047 | Section width            | 100 mm        |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 315 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 200 kg        |
| Recommended rim width | 2.10          | Load capacity at 30 km/h | 155 kg        |
| Permitted rim width   | 2.50C, 3.00D  | Load capacity at 40 km/h | 140 kg        |
|                       |               | EAN Tube                 | 8714692285219 |

## 3.50 - 6 4 PR 45 A6 TT V60

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081705 | Section width            | 100 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter         | 355 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 215 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h | 165 kg        |
| Permitted rim width   | 2.50C         | Load capacity at 40 km/h | 150 kg        |
|                       |               | EAN Tube                 | 8714692285226 |

# - SMALL TYRES AGRICULTURAL

## 3.50 - 8 4 PR 52 A6 TT V60

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081804 | Section width            | 100 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter         | 395 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 260 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h | 200 kg        |
| Permitted rim width   | 2.50 C        | Load capacity at 40 km/h | 180 kg        |
|                       |               | EAN Tube                 | 8714692285257 |

## 4.00 - 8 4 PR 57 A6 TT V60

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081767 | Section width            | 105 mm        |
| Nominal tyre pressure | 2,8 bar       | Overall diameter         | 425 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 300 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h | 230 kg        |
| Permitted rim width   | 2.50C, 3.00D  | Load capacity at 40 km/h | 210 kg        |
|                       |               | EAN Tube                 | 8714692285264 |

## 15x6.00 - 6 4 PR 61 A6 TT V61

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082139 | Section width            | 160 mm        |
| Nominal tyre pressure | 2,5           | Overall diameter         | 380 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 340 kg        |
| Recommended rim width | 4.50A         | Load capacity at 30 km/h | 260 kg        |
| Permitted rim width   | 2.50C, 3.00D  | Load capacity at 40 km/h | 230 kg        |
|                       |               | EAN Tube                 | 8714692285240 |

## 170/60 - 8 6 PR 71 A6 TT V61

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082160 | Section width            | 170 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter         | 425 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 445 kg        |
| Recommended rim width | 5.50A         | Load capacity at 30 km/h | 345 kg        |
| Permitted rim width   | 5.375I        | Load capacity at 40 km/h | 270 kg        |
| Alternative tyre size | 16 x 6.50-8   | EAN Tube                 | 8714692285301 |

## 18x8.50 - 8 4 PR 77 A6 TT V61

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082443 | Section width            | 210 mm        |
| Nominal tyre pressure | 2,0 bar       | Overall diameter         | 465 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 530 kg        |
| Recommended rim width | 7.00I         | Load capacity at 30 km/h | 410 kg        |
| Permitted rim width   | 5.375I        | Load capacity at 40 km/h | 370 kg        |
|                       |               | EAN Tube                 | 8714692285318 |



# SMALL TYRES - AGRICULTURAL

## 18x8.50 - 8 6 PR 85 A6 TL V61

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082351 | Section width            | 210 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter         | 465 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 670 kg        |
| Recommended rim width | 7.00I         | Load capacity at 30 km/h | 520 kg        |
| Permitted rim width   | 5.375I        | Load capacity at 40 km/h | 465 kg        |
|                       |               | EAN Tube                 | 8714692285318 |

## 3.50 - 6 4 PR 45 A6 TT V64

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081620 | Section width            | 100 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter         | 355 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 215 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h | 165 kg        |
| Permitted rim width   | 2.50C         | Load capacity at 40 km/h | 150 kg        |
|                       |               | EAN Tube                 | 8714692285226 |

## 160/65 - 6 60 A8 TT V64+

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692256424 | Section width            | 160 mm        |
| Nominal tyre pressure | 2,4 bar       | Overall diameter         | 365 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 350 kg        |
| Recommended rim width | 4.50A         | Load capacity at 30 km/h | 280 kg        |
| Permitted rim width   | 2.50C         | Load capacity at 40 km/h | 250 kg        |
| Alternative tyre size | 16 x 6.00-6   | EAN Tube                 | 8714692285240 |

## 160/65 - 6 66 A8 TT V64+

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692244490 | Section width            | 160 mm        |
| Nominal tyre pressure | 3,2 bar       | Overall diameter         | 365 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 420 kg        |
| Recommended rim width | 4.50A         | Load capacity at 30 km/h | 335 kg        |
| Permitted rim width   | 2.50C         | Load capacity at 40 km/h | 300 kg        |
| Alternative tyre size | 16 x 6.00-6   | EAN Tube                 | 8714692285240 |

## 3.50 - 8 4 PR 52 A6 TT V64

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081811 | Section width            | 100 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter         | 395 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 260 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h | 200 kg        |
| Permitted rim width   | 2.50 C        | Load capacity at 40 km/h | 180 kg        |
|                       |               | EAN Tube                 | 8714692285257 |



# - SMALL TYRES AGRICULTURAL

## 170/60 - 8 65 A8 TT V64+

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692256462 | Section width            | 170 mm        |
| Nominal tyre pressure | 2,4 bar       | Overall diameter         | 410 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 405 kg        |
| Recommended rim width | 5.50A         | Load capacity at 30 km/h | 325 kg        |
| Permitted rim width   | 5.375I        | Load capacity at 40 km/h | 290 kg        |
| Alternative tyre size | 16 x 6.50-8   | EAN Tube                 | 8714692285301 |

## 170/60 - 8 71 A8 TT V64+

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692256462 | Section width            | 170 mm        |
| Nominal tyre pressure | 3,2 bar       | Overall diameter         | 410 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 485 kg        |
| Recommended rim width | 5.50A         | Load capacity at 30 km/h | 385 kg        |
| Permitted rim width   | 5.375I        | Load capacity at 40 km/h | 345 kg        |
| Alternative tyre size | 16 x 6.50-8   | EAN Tube                 | 8714692285301 |

## 210/60 - 8 83 A8 TT V64+

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692244513 | Section width            | 215 mm        |
| Nominal tyre pressure | 3,2 bar       | Overall diameter         | 455 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 680 kg        |
| Recommended rim width | 7.00I         | Load capacity at 30 km/h | 545 kg        |
| Permitted rim width   | 5.375I        | Load capacity at 40 km/h | 485 kg        |
| Alternative tyre size | 18 x 8.50-8   | EAN Tube                 | 8714692285318 |

## 3.00 - 4 4 PR 30 A6 TT V67

|                       |               |                            |               |
|-----------------------|---------------|----------------------------|---------------|
| EAN                   | 8714692081682 | Section width              | 90 mm         |
| Nominal tyre pressure | 3,5 bar       | Overall diameter           | 275 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h** | 135 kg        |
| Recommended rim width | 2.10          | Load capacity at 30 km/h** | 105 kg        |
| Permitted rim width   | 2.50C         | Load capacity at 40 km/h** | 95 kg         |
|                       |               | EAN Tube                   | 8714692285202 |

## 4.00 - 4 4 PR 43 A6 TT V67

|                       |               |                            |               |
|-----------------------|---------------|----------------------------|---------------|
| EAN                   | 8714692082054 | Section width              | 110 mm        |
| Nominal tyre pressure | 2,8 bar       | Overall diameter           | 305 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h** | 200 kg        |
| Recommended rim width | 2.10          | Load capacity at 30 km/h** | 155 kg        |
| Permitted rim width   | 2.50C, 3.00D  | Load capacity at 40 km/h** | 140 kg        |
|                       |               | EAN Tube                   | 8714692285219 |



# SMALL TYRES - AGRICULTURAL

## 3.50 - 6 4 PR 45 A6 TT V67

|                       |               |                            |               |
|-----------------------|---------------|----------------------------|---------------|
| EAN                   | 8714692081712 | Section width              | 100 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter           | 355 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h** | 215 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h** | 165 kg        |
| Permitted rim width   | 2.50C         | Load capacity at 40 km/h** | 150 kg        |
|                       |               | EAN Tube                   | 8714692285226 |

## 3.50 - 8 4 PR 52 A6 TT V67

|                       |               |                            |               |
|-----------------------|---------------|----------------------------|---------------|
| EAN                   | 8714692081828 | Section width              | 100 mm        |
| Nominal tyre pressure | 3,0 bar       | Overall diameter           | 395 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h** | 260 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h** | 200 kg        |
| Permitted rim width   | 2.50 C        | Load capacity at 40 km/h** | 180 kg        |
|                       |               | EAN Tube                   | 8714692285257 |

## 4.00 - 8 4 PR 57 A6 TT V67

|                       |               |                            |               |
|-----------------------|---------------|----------------------------|---------------|
| EAN                   | 8714692081842 | Section width              | 105 mm        |
| Nominal tyre pressure | 2,8 bar       | Overall diameter           | 425 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h** | 300 kg        |
| Recommended rim width | 2.50A         | Load capacity at 30 km/h** | 230 kg        |
| Permitted rim width   | 2.50C, 3.00D  | Load capacity at 40 km/h** | 210 kg        |
|                       |               | EAN Tube                   | 8714692285264 |

## 4.00 - 12 4 PR 66 A6 TT V67

|                       |               |                            |               |
|-----------------------|---------------|----------------------------|---------------|
| EAN                   | 8714692082122 | Section width              | 110 mm        |
| Nominal tyre pressure | 2,8 bar       | Overall diameter           | 515 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h** | 390 kg        |
| Recommended rim width | 3.00D         | Load capacity at 30 km/h** | 300 kg        |
| Permitted rim width   | 2.50C, 3.00D  | Load capacity at 40 km/h** | 270 kg        |
|                       |               | EAN Tube                   | 8714692285356 |

# - SMALL TYRES AGRICULTURAL



# LAWN- AND GROUNDCARE



## **GREENTRAC**

CUT THE COSTS, KEEP IT GREEN

### **FEATURES**

High rubber to air ratio in the tread

Stable central section

Raised cleats in the shoulder area

### **BENEFITS**

Wear resistant and durable

Stable on course and comfortable to drive

High traction, minimal wear



# LAWN- AND GROUNDCARE



## V71

FOR SMALL MACHINES  
AND TOOLS

### FEATURES

- Special lawn tread
- Flexible carcass construction
- Relatively large contact surface

### BENEFITS

- Lawn friendly
- Comfortable ride
- Minimal rutting



## V88

KIND TO THE LAWN WHILE  
PROVIDING SUFFICIENT TRACTION

### FEATURES






- Large and flat contact area
- Rounded shoulders
- Flexible sidewall construction

### BENEFITS

- Minimal rutting
- Avoids damage to the grass
- Excellent shock absorption



# LAWN- AND GROUNDCARE

| Profil    | Tyre size                        | PR | Service description | Nominal inflation pressure (bar) |  |  mm |  mm |  mm |  mm | Pag. |
|-----------|----------------------------------|----|---------------------|----------------------------------|---|--|--|--|--|------|
| Greentrax | 160/65 - 6 IMP<br>(15x6.00-6)    |    | 60 A8               | 2,4                              | 4.50 A  | 155  | 365  | 160*   | 1.085*   | 223  |
| Greentrax | 170/60 - 8 IMP<br>(16x6.50-8)    |    | 65 A8               | 2,4                              | 5.50 A  | 170  | 410  | 185*   | 1.225*   | 223  |
| Greentrax | 210/60 - 8 IMP<br>(18x8.50-8)    |    | 76 A8               | 2,4                              | 7.00 I  | 215  | 455  | 205*   | 1.365*   | 223  |
| Greentrax | 250/50 - 8 IMP<br>(18x9.50-8)    |    | 90 A8               | 2,4                              | 7.00 I  | 240  | 455  | 205*   | 1.360*   | 223  |
| Greentrax | 250/60 - 8 IMP<br>(20x10.00-8)   |    | 96 A8               | 2,4                              | 7.00 I  | 245  | 505  | 225*   | 1.565*   | 223  |
| Greentrax | 210/60 - 10 IMP<br>(20x8.00-10)  |    | 87 A8               | 2,4                              | 6.00 I  | 205  | 505  | 225*   | 1.510*   | 224  |
| Greentrax | 250/50 - 10 IMP<br>(20x10.00-10) |    | 97 A8               | 2,4                              | 8.50 I  | 255  | 505  | 230*   | 1.555*   | 224  |
| Greentrax | 270/50 - 12 IMP<br>(23x10.50-12) |    | 103 A8              | 2,4                              | 8.50 I  | 265  | 580  | 265*   | 1.740*   | 224  |
| Greentrax | 320/45 - 12 IMP<br>(24x13.00-12) |    | 110 A8              | 2,4                              | 10.50 I   | 320  | 600  | 275*   | 1.825*   | 224  |
| Greentrax | 320/55 - 12 IMP<br>(26x12.00-12) |    | 116 A8              | 2,4                              | 10.50 I   | 320  | 655  | 300*   | 1.965*   | 224  |
| V71       | 170/60 - 8<br>(16x6.50-8)        | 4  |                     | 2,0                              | 5.50 A  | 175  | 430  |  |  | 225  |
| V88       | 18x 8.50 - 8                     | 4  |                     | 2,0                              | 7.00 I  | 210  | 465  |  |  | 225  |
| V88       | 18x 8.50 - 8                     | 6  |                     | 3,0                              | 7.00 I  | 210  | 465  |  |  | 225  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

\* = Calculated values

# LAWN- AND GROUNDCARE

## 160/65 - 6 IMP 60 A8 / 48 A8 TL GREENTRAX

|                       |               |                            |           |
|-----------------------|---------------|----------------------------|-----------|
| EAN                   | 8714692274114 | Section width              | 155 mm    |
| Nominal tyre pressure | 2,4 bar       | Overall diameter           | 365 mm    |
| Tyre construction     | Diagonaal     | Static loaded radius       | 160* mm   |
| Recommended rim width | 4.50A         | Rolling circumference      | 1.085* mm |
|                       |               | Load capacity at 10 km/h** | 350 kg    |
| Alternative tyre size | 15x6.00 - 6   | Load capacity at 30 km/h** | 280 kg    |
| EAN Tube              | 8714692238857 | Load capacity at 40 km/h** | 250 kg    |

## 170/60 - 8 IMP 65 A8 / 53 A8 TL GREENTRAX

|                       |               |                            |          |
|-----------------------|---------------|----------------------------|----------|
| EAN                   | 8714692274121 | Section width              | 170 mm   |
| Nominal tyre pressure | 2,4 bar       | Overall diameter           | 410 mm   |
| Tyre construction     | Diagonaal     | Static loaded radius       | 185* mm  |
| Recommended rim width | 5.50A         | Rolling circumference      | 1225* mm |
| Permitted rim width   | 5.375I        | Load capacity at 10 km/h** | 405 kg   |
| Alternative tyre size | 16x6.50 - 8   | Load capacity at 30 km/h** | 325 kg   |
| EAN Tube              | 8714692238918 | Load capacity at 40 km/h** | 290 kg   |

## 210/60 - 8 IMP 76 A8 / 64 A8 TL GREENTRAX

|                       |               |                            |          |
|-----------------------|---------------|----------------------------|----------|
| EAN                   | 8714692274138 | Section width              | 215 mm   |
| Nominal tyre pressure | 2,4 bar       | Overall diameter           | 455 mm   |
| Tyre construction     | Diagonaal     | Static loaded radius       | 205* mm  |
| Recommended rim width | 7.00I         | Rolling circumference      | 1365* mm |
|                       |               | Load capacity at 10 km/h** | 560 kg   |
| Alternative tyre size | 18x8.50 - 8   | Load capacity at 30 km/h** | 450 kg   |
| EAN Tube              | 8714692238925 | Load capacity at 40 km/h** | 400 kg   |

## 250/50 - 8 IMP 90 A8 / 78 A8 TL GREENTRAX

|                       |               |                            |          |
|-----------------------|---------------|----------------------------|----------|
| EAN                   | 8714692274145 | Section width              | 240 mm   |
| Nominal tyre pressure | 2,4 bar       | Overall diameter           | 455 mm   |
| Tyre construction     | Diagonaal     | Static loaded radius       | 205* mm  |
| Recommended rim width | 7.00I         | Rolling circumference      | 1360* mm |
|                       |               | Load capacity at 10 km/h** | 840 kg   |
| Alternative tyre size | 18x9.50 - 8   | Load capacity at 30 km/h** | 670 kg   |
|                       |               | Load capacity at 40 km/h** | 600 kg   |

## 250/60 - 8 IMP 96 A8 / 84 A8 TL GREENTRAX

|                       |               |                            |          |
|-----------------------|---------------|----------------------------|----------|
| EAN                   | 8714692274152 | Section width              | 245 mm   |
| Nominal tyre pressure | 2,4 bar       | Overall diameter           | 505 mm   |
| Tyre construction     | Diagonaal     | Static loaded radius       | 225* mm  |
| Recommended rim width | 7.00I         | Rolling circumference      | 1565* mm |
| Permitted rim width   | 8.00I         | Load capacity at 10 km/h** | 995 kg   |
| Alternative tyre size | 20x10.00 - 8  | Load capacity at 30 km/h** | 795 kg   |
|                       |               | Load capacity at 40 km/h** | 710 kg   |



# LAWN- AND GROUNDCARE

## 210/60 - 10 IMP 87 A8 / 75 A8 TL GREENTRAX

|                       |               |                            |          |
|-----------------------|---------------|----------------------------|----------|
| EAN                   | 8714692274169 | Section width              | 205 mm   |
| Nominal tyre pressure | 2,4 bar       | Overall diameter           | 505 mm   |
| Tyre construction     | Diagonaal     | Static loaded radius       | 225* mm  |
| Recommended rim width | 6.00l         | Rolling circumference      | 1510* mm |
|                       |               | Load capacity at 10 km/h** | 765 kg   |
| Alternative tyre size | 20x8.00 - 10  | Load capacity at 30 km/h** | 610 kg   |
|                       |               | Load capacity at 40 km/h** | 545 kg   |

## 250/50 - 10 IMP 97 A8 / 85 A8 TL GREENTRAX

|                       |                    |                            |          |
|-----------------------|--------------------|----------------------------|----------|
| EAN                   | 8714692274176      | Section width              | 255 mm   |
| Nominal tyre pressure | 2,4 bar            | Overall diameter           | 505 mm   |
| Tyre construction     | Diagonaal          | Static loaded radius       | 230* mm  |
| Recommended rim width | 8.50l              | Rolling circumference      | 1555* mm |
| Permitted rim width   | 7.00l, 8.00l, 8.25 | Load capacity at 10 km/h** | 1020 kg  |
| Alternative tyre size | 20x10.00 - 10      | Load capacity at 30 km/h** | 820 kg   |
|                       |                    | Load capacity at 40 km/h** | 730 kg   |

## 270/50 - 12 IMP 103 A8 / 91 A8 TL GREENTRAX

|                       |                    |                            |          |
|-----------------------|--------------------|----------------------------|----------|
| EAN                   | 8714692274183      | Section width              | 265 mm   |
| Nominal tyre pressure | 2,4 bar            | Overall diameter           | 580 mm   |
| Tyre construction     | Diagonaal          | Static loaded radius       | 265* mm  |
| Recommended rim width | 8.50l              | Rolling circumference      | 1740* mm |
| Permitted rim width   | 7.00l, 71A, 8.50JA | Load capacity at 10 km/h** | 1225 kg  |
| Alternative tyre size | 23x10.50 - 12      | Load capacity at 30 km/h** | 980 kg   |
|                       |                    | Load capacity at 40 km/h** | 875 kg   |

## 320/45 - 12 IMP 110 A8 / 98 A8 TL GREENTRAX

|                       |                 |                            |          |
|-----------------------|-----------------|----------------------------|----------|
| EAN                   | 8714692292224   | Section width              | 320 mm   |
| Nominal tyre pressure | 2,4 bar         | Overall diameter           | 600 mm   |
| Tyre construction     | Diagonaal       | Static loaded radius       | 275* mm  |
| Recommended rim width | 10.50l          | Rolling circumference      | 1825* mm |
| Permitted rim width   | 9.50JA, 10.50JA | Load capacity at 10 km/h** | 1485 kg  |
| Alternative tyre size | 24x13.00 - 12   | Load capacity at 30 km/h** | 1185 kg  |
|                       |                 | Load capacity at 40 km/h** | 1060 kg  |

## 320/55 - 12 IMP 116 A8 / 104 A8 TL GREENTRAX

|                       |                 |                            |          |
|-----------------------|-----------------|----------------------------|----------|
| EAN                   | 8714692274190   | Section width              | 320 mm   |
| Nominal tyre pressure | 2,4 bar         | Overall diameter           | 655 mm   |
| Tyre construction     | Diagonaal       | Static loaded radius       | 300* mm  |
| Recommended rim width | 10.50 l         | Rolling circumference      | 1965* mm |
| Permitted rim width   | 8.50l, 8.50JA,  | Load capacity at 10 km/h** | 1750 kg  |
|                       | 9.50JA, 10.50JA | Load capacity at 30 km/h** | 1400 kg  |
| Alternative tyre size | 26x12.00 - 12   | Load capacity at 40 km/h** | 1250 kg  |



# LAWN- AND GROUNDCARE

## 170/60 - 8 4 PR TT V71

|                       |               |                            |        |
|-----------------------|---------------|----------------------------|--------|
| EAN                   | 8714692082115 | Section width              | 175 mm |
| Nominal tyre pressure | 2,0 bar       | Overall diameter           | 430 mm |
| Tyre construction     | Diagonaal     | Static loaded radius       | N/A mm |
| Recommended rim width | 5.50A         | Rolling circumference      | N/A mm |
| Permitted rim width   | 5.375I        | Load capacity at 10 km/h** | 345 kg |
| Alternative tyre size | 16x6.50 - 8   | Load capacity at 30 km/h** | 265 kg |
| EAN Tube              | 8714692285301 | Load capacity at 40 km/h** | 240 kg |

## 18x8.50 - 8 4 PR TL V88

|                       |               |                            |        |
|-----------------------|---------------|----------------------------|--------|
| EAN                   | 8714692082344 | Section width              | 210 mm |
| Nominal tyre pressure | 2,0 bar       | Overall diameter           | 465 mm |
| Tyre construction     | Diagonaal     | Static loaded radius       | N/A mm |
| Recommended rim width | 7.00I         | Rolling circumference      | N/A mm |
|                       |               | Load capacity at 10 km/h** | 530 kg |
|                       |               | Load capacity at 30 km/h** | 410 kg |
| EAN Tube              | 8714692285318 | Load capacity at 40 km/h** | 370 kg |

## 18x8.50 - 8 6 PR TL V88

|                       |               |                            |        |
|-----------------------|---------------|----------------------------|--------|
| EAN                   | 8714692082436 | Section width              | 210 mm |
| Nominal tyre pressure | 3,0 bar       | Overall diameter           | 465 mm |
| Tyre construction     | Diagonaal     | Static loaded radius       | N/A mm |
| Recommended rim width | 7.00I         | Rolling circumference      | N/A mm |
|                       |               | Load capacity at 10 km/h** | 670 kg |
|                       |               | Load capacity at 30 km/h** | 515 kg |
| EAN Tube              | 8714692285318 | Load capacity at 40 km/h** | 465 kg |



# SMALL TYRES UTILITY —



## V20

STRONG, TRIED AND TESTED

---

### FEATURES

- Strong carcass
- Rounded contour
- Tried and tested construction

### BENEFITS

- Long lifespan
- Excellent manoeuvrability
- Good price/quality ratio



## V25

FOR PEDAL-CARTS AND  
HEAVY-DUTY WHEELBARROWS

---

### FEATURES

- Sturdy sidewall construction
- Strong carcass
- Robust tread

### BENEFITS

- High resistance to punctures
- High endurance
- Good grip



## V40

**HIGH LOAD CAPACITY FOR  
INTERNAL TRANSPORT**

### FEATURES

- All-round tread pattern
- Centre-contact zone
- Open shoulder tread

### BENEFITS

- Suits a variety of applications
- Low rolling resistance
- Good stability



## V52

**FOR MOBILE HOMES AND  
AGRICULTURAL EQUIPMENT**

### FEATURES

- Strong carcass
- Flat contour
- Optimised tread profile

### BENEFITS

- Suitable for heavy loads
- Optimal pressure distribution in contact area
- Low rolling resistance



# SMALL TYRES UTILITY —



## V76

### MANOEUVRABILITY FOR INTERNAL TRANSPORT

---

#### FEATURES

“Cube” profile

Flexible carcass

Available in grey upon request




#### BENEFITS

Optimised for internal transport equipment

Absorbs excessive vibrations

For warehouses, hospitals, supermarkets, etc.

# SMALL TYRES — UTILITY

| Profil | Tyre size       | PR | Nominal inflation pressure (bar) |  | Permitted rim width    |  mm |  mm | Pag. |
|--------|-----------------|----|----------------------------------|---|------------------------|--|--|------|
| V20    | 200 x 50        | 2  | 2,5                              | 200 x 50  |                        | 50   | 195  | 230  |
| V20    | 260 x 85        | 4  | 5,0                              | 2.10 x 4  | 2.10 - 4               | 90   | 270  | 230  |
| V20    | 4.00 - 4        | 4  | 5,0                              | 2.50 C x 4  | 2.50 C - 4             | 110  | 305  | 230  |
| V20    | 3.50 - 6        | 4  | 4,5                              | 2.50 A x 6  | 2.50 A - 6             | 95   | 335  | 230  |
| V20    | 2.25 - 8        | 4  | 3,5                              | 1.75 x 8  |                        | 70   | 335  | 230  |
| V20    | 4.00 - 8        | 4  | 4,0                              | 2.50 x 8  | 2.50 A - 8             | 105  | 415  | 230  |
| V25    | 4.00 - 8        | 4  | 4,0                              | 2.50 x 8  | 2.50 A - 8             | 105  | 415  | 231  |
| V40    | 4.00 - 8        | 6  | 5,0                              | 3.00 D - 8  | 2.50 C - 8             | 115  | 430  | 231  |
| V40    | 4.00 - 8        | 8  | 6,5                              | 3.00 D - 8  | 2.50 C - 8             | 115  | 430  | 231  |
| V52    | 5.00 - 8        | 6  | 6,3                              | 3.00 D - 8  | 3.50 D - 8             | 135  | 470  | 231  |
| V52    | 5.00 - 8        | 8  | 7,0                              | 3.00 D - 8  | 3.50 D - 8             | 135  | 470  | 231  |
| V52    | 6.00 - 9        | 6  | 5,0                              | 4.00 E - 9  | 4.00 E x 9             | 165  | 550  | 231  |
| V52    | 6.00 - 9        | 10 | 7,0                              | 4.00 E - 9  |                        | 165  | 550  | 232  |
| V76    | 260 x 85        | 4  | 5,0                              | 2.10 x 4  | 2.10 - 4               | 90   | 270  | 232  |
| V76    | 260 x 85        | 4  | 5,0                              | 2.10 x 4  | 2.10 - 4               | 90   | 270  | 232  |
| V76    | 260 x 85        | 6  | 7,0                              | 2.10 - 4  |                        | 90   | 270  | 232  |
| V76    | 4.10 / 3.50 - 4 | 4  | 5,0                              | 2.10 x 4  | 2.50 C x 4, 2.50 C - 4 | 95   | 280  | 232  |
| V76    | 4.00 - 4        | 4  | 2,8                              | 2.50 C x 4  | 2.50 C - 4             | 110  | 305  | 232  |
| V76    | 4.00 - 4        | 6  | 7,0                              | 2.50 C - 4  |                        | 110  | 305  | 233  |
| V76    | 4.10 / 3.50 - 6 | 4  | 4,5                              | 2.50 A x 6  | 2.50 A - 6             | 100  | 345  | 233  |
| V76    | 4.80 / 4.00 - 8 | 4  | 4,5                              | 2.50 A x 8  | 2.50 C - 8             | 115  | 435  | 233  |

For the explanation of the symbols and abbreviations, see the inside of the last page.



# SMALL TYRES UTILITY —

## 200x50 2 PR TT V20

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081965 | Section width            | 50 mm         |
| Nominal tyre pressure | 2,5 bar       | Overall diameter         | 195 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 75 kg         |
| Recommended rim width | 200 x 50      | Load capacity at 20 km/h | 65 kg         |
|                       |               | EAN Tube                 | 8714692304644 |

## 260x85 4 PR TT V20

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081644 | Section width            | 90 mm         |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 270 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 210 kg        |
| Recommended rim width | 2.10 x 4      | Load capacity at 20 km/h | 185 kg        |
| Permitted rim width   | 2.10 - 4      | EAN Tube                 | 8714692285202 |

## 4.00 - 4 4 PR TT V20

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081873 | Section width            | 110 mm        |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 305 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 300 kg        |
| Recommended rim width | 2.50C x 4     | Load capacity at 20 km/h | 265 kg        |
| Permitted rim width   | 2.50 C - 4    | EAN Tube                 | 8714692285219 |

## 3.50 - 6 4 PR TT V20

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081699 | Section width            | 95 mm         |
| Nominal tyre pressure | 4,5 bar       | Overall diameter         | 335 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 280 kg        |
| Recommended rim width | 2.50A x 6     | Load capacity at 20 km/h | 250 kg        |
| Permitted rim width   | 2.50A - 6     | EAN Tube                 | 8714692285226 |

## 2.25 - 8 4 PR TT V20

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081835 | Section width            | 70 mm         |
| Nominal tyre pressure | 3,5 bar       | Overall diameter         | 335 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 150 kg        |
| Recommended rim width | 1.75 x 8      | Load capacity at 20 km/h | 135 kg        |
|                       |               | EAN Tube                 | 8714692034855 |

## 4.00 - 8 4 PR TT V20

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081736 | Section width            | 105 mm        |
| Nominal tyre pressure | 4,0 bar       | Overall diameter         | 415 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 400 kg        |
| Recommended rim width | 2.50 x 8      | Load capacity at 20 km/h | 355 kg        |
| Permitted rim width   | 2.50A - 8     | EAN Tube                 | 8714692285264 |

# SMALL TYRES — UTILITY

## 4.00 - 8 4 PR TT V25

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081750 | Section width            | 105 mm        |
| Nominal tyre pressure | 4,0 bar       | Overall diameter         | 415 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 400 kg        |
| Recommended rim width | 2.50 x 8      | Load capacity at 20 km/h | 355 kg        |
| Permitted rim width   | 2.50A - 8     | EAN Tube                 | 8714692285264 |

## 4.00 - 8 6 PR TT V40

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081910 | Section width            | 115 mm        |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 430 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 600 kg        |
| Recommended rim width | 3.00D - 8     | Load capacity at 20 km/h | 530 kg        |
| Permitted rim width   | 2.50C - 8     | EAN Tube                 | 8714692285271 |

## 4.00 - 8 8 PR TT V40

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081927 | Section width            | 115 mm        |
| Nominal tyre pressure | 6,5 bar       | Overall diameter         | 430 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 710 kg        |
| Recommended rim width | 3.00D - 8     | Load capacity at 20 km/h | 630 kg        |
| Permitted rim width   | 2.50C - 8     | EAN Tube                 | 8714692285271 |

## 5.00 - 8 6 PR TT V52

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081996 | Section width            | 135 mm        |
| Nominal tyre pressure | 6,3 bar       | Overall diameter         | 470 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 820 kg        |
| Recommended rim width | 3.00D - 8     | Load capacity at 20 km/h | 725 kg        |
| Permitted rim width   | 3.50D - 8     | EAN Tube                 | 8714692285295 |

## 5.00 - 8 8 PR TT V52

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082009 | Section width            | 135 mm        |
| Nominal tyre pressure | 7,0 bar       | Overall diameter         | 470 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 925 kg        |
| Recommended rim width | 3.00D - 8     | Load capacity at 20 km/h | 820 kg        |
| Permitted rim width   | 3.50D - 8     | EAN Tube                 | 8714692285295 |

## 6.00 - 9 6 PR TT V52

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082184 | Section width            | 165 mm        |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 550 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 1100 kg       |
| Recommended rim width | 4.00E - 9     | Load capacity at 20 km/h | 975 kg        |
| Permitted rim width   | 4.00E x 9     | EAN Tube                 | 8714692285332 |



# SMALL TYRES UTILITY —

## 6.00 - 9 10 PR TT V52

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692082191 | Section width            | 165 mm        |
| Nominal tyre pressure | 7,0 bar       | Overall diameter         | 550 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 1300 kg       |
| Recommended rim width | 4.00E - 9     | Load capacity at 20 km/h | 1150 kg       |
|                       |               | EAN Tube                 | 8714692285332 |

## 260x85 4 PR TT V76

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081668 | Section width            | 90 mm         |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 270 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 210 kg        |
| Recommended rim width | 2.10 x 4      | Load capacity at 20 km/h | 185 kg        |
| Permitted rim width   | 2.10 - 4      | EAN Tube                 | 8714692285202 |

## 260x85 4 PR TL V76

|                       |               |                          |        |
|-----------------------|---------------|--------------------------|--------|
| EAN                   | 8714692082450 | Section width            | 90 mm  |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 270 mm |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 210 kg |
| Recommended rim width | 2.10 x 4      | Load capacity at 20 km/h | 185 kg |
| Permitted rim width   | 2.10 - 4      | EAN Tube                 | 0      |

## 260x85 6 PR TT V76

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081903 | Section width            | 90 mm         |
| Nominal tyre pressure | 7,0 bar       | Overall diameter         | 270 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 250 kg        |
| Recommended rim width | 2.10 - 4      | Load capacity at 20 km/h | 225 kg        |
|                       |               | EAN Tube                 | 8714692285202 |

## 4.10/3.50 - 4 4 PR TT V76

|                       |                      |                          |               |
|-----------------------|----------------------|--------------------------|---------------|
| EAN                   | 8714692081897        | Section width            | 95 mm         |
| Nominal tyre pressure | 5,0 bar              | Overall diameter         | 280 mm        |
| Tyre construction     | Diagonaal            | Load capacity at 10 km/h | 260 kg        |
| Recommended rim width | 2.10 x 4             | Load capacity at 20 km/h | 230 kg        |
| Permitted rim width   | 2.50C x 4, 2.50C - 4 | EAN Tube                 | 8714692285219 |

## 4.00 - 4 4 PR TT V76

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081880 | Section width            | 110 mm        |
| Nominal tyre pressure | 5,0 bar       | Overall diameter         | 305 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 300 kg        |
| Recommended rim width | 2.50C x 4     | Load capacity at 20 km/h | 265 kg        |
| Permitted rim width   | 2.50C - 4     | EAN Tube                 | 8714692285219 |



# SMALL TYRES — UTILITY

## 4.00 - 4 6 PR TT V76

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692105876 | Section width            | 110 mm        |
| Nominal tyre pressure | 7,0 bar       | Overall diameter         | 305 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 350 kg        |
| Recommended rim width | 2.50C - 4     | Load capacity at 20 km/h | 310 kg        |
|                       |               | EAN Tube                 | 8714692285219 |

## 4.10/3.50 - 6 4 PR TT V76

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081729 | Section width            | 100 mm        |
| Nominal tyre pressure | 4,5 bar       | Overall diameter         | 345 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 280 kg        |
| Recommended rim width | 2.50A x 6     | Load capacity at 20 km/h | 250 kg        |
| Permitted rim width   | 2.50A - 6     | EAN Tube                 | 8714692285219 |

## 4.80/4.00 - 8 4 PR TT V76

|                       |               |                          |               |
|-----------------------|---------------|--------------------------|---------------|
| EAN                   | 8714692081774 | Section width            | 115 mm        |
| Nominal tyre pressure | 4,5 bar       | Overall diameter         | 435 mm        |
| Tyre construction     | Diagonaal     | Load capacity at 10 km/h | 440 kg        |
| Recommended rim width | 2.50A x 8     | Load capacity at 20 km/h | 390 kg        |
| Permitted rim width   | 2.50C - 8     | EAN Tube                 | 8714692285264 |



# SMALL TYRES FAST TRAILER



## V47

**HIGH COMFORT FOR  
SMALL TRAILERS**

### FEATURES

Speed index "M"

Tried and tested construction

Strong carcass

### BENEFITS

Capable of speeds of up to 130 km/h

Peak loads handled with ease

Reliable and safe



## V48

**EACH TRAILER DESERVES  
THE BEST TYRE**

### FEATURES

Optimised tread contour

Unique tread design

Tread wear indicator

### BENEFITS

Follows the towing vehicle perfectly

Good aquaplaning resistance

Indicates minimum tread depth

# SMALL TYRES FAST TRAILER



## V49

TO ENSURE A COMFORTABLE  
ROLLING PERFORMANCE

### FEATURES

- Wide profile grooves
- Flat contour
- Strong carcass

### BENEFITS

- High aquaplaning resistance
- Good stability
- Long lifespan



## V54

THE HEAVY-DUTY  
HIGH-SPEED TYRE

### FEATURES

- Durable carcass construction
- Thick tread
- Unique shoulder tread

### BENEFITS

- Long, effective lifespan
- Greater resistance to punctures
- Good track stability



# SMALL TYRES FAST TRAILER



## V71

COMBINING SPEED WITH  
STABILITY & COMFORT

---

### FEATURES

- Sophisticated tread
- Tubeless specification
- Relatively large contact surface

### BENEFITS

- Stability & grip on grass or sand
- Easy to fit
- Comfortable ride



## V90

GRIP ON SMOOTH, BUMPY,  
SLIPPERY SURFACES

---

### FEATURES

- Special tread
- Sturdy construction
- Rounded contour

### BENEFITS

- Suitable for a range of surface conditions
- Operational safety
- Good handling

# SMALL TYRES FAST TRAILER

| Profil | Tyre size      | PR | Service description | Nominal inflation pressure (bar) |  |  |  | Pag. |
|--------|----------------|----|---------------------|----------------------------------|---|---|---|------|
|        |                |    |                     |                                  | mm  | mm  |   |      |
| V47    | 3.50 - 8       | 4  | 46 M                | 2,5                              | 2.50A x 8   | 99  | 389   | 237  |
| V47    | 4.00 - 8       | 4  | 63 M                | 3,5                              | 2.50A x 8   | 114   | 422   | 238  |
| V47    | 4.00 - 8       | 6  | 70 M                | 4,3                              | 2.50A x 8   | 114   | 422   | 238  |
| V47    | 5.00 - 8       | 4  | 71 M                | 3,5                              | 3.00D x 8   | 145   | 478   | 238  |
| V47    | 5.00 - 8       | 6  | 78 M                | 5,0                              | 3.00D x 8   | 145   | 478   | 238  |
| V47    | 5.00 - 10      | 4  | 74 M                | 3,5                              | 3.50B x 10  | 146   | 525   | 238  |
| V47    | 5.00 - 10      | 6  | 80 M                | 4,0                              | 3.50B x 10  | 146   | 525   | 238  |
| V47    | 5.00 - 10      | 8  | 84 M                | 5,0                              | 3.50B x 10  | 146   | 525   | 239  |
| V48    | 18.5x 8.50 - 8 | 6  | 78 M                | 3,6                              | 7.00 x 8  | 220   | 475   | 239  |
| V48    | 18x 8.0 - 10   | 6  | 98 M                | 6,0                              | 6.00 x 10   | 188   | 462   | 239  |
| V48    | 20.5x 8.0 - 10 | 6  | 84 M                | 3,4                              | 6.00 x 10   | 205   | 524   | 239  |
| V48    | 20.5x 8.0 - 10 | 10 | 96 M                | 6,2                              | 6.00 x 10   | 205   | 524   | 239  |
| V49    | 4.80 - 8       | 6  | 71 M                | 6,3                              | 3.75 x 8  | 125   | 429   | 239  |
| V49    | 5.70 - 8       | 6  | 77 M                | 5,2                              | 4.50 x 8  | 156   | 470   | 240  |
| V54    | 4.00 - 8       | 6  | 71 M                | 4,3                              | 3.00D x 8   | 111   | 423   | 240  |
| V54    | 4.00 - 8       | 8  | 75 M                | 6,0                              | 3.00D - 8   | 111   | 423   | 240  |
| V54    | 5.00 - 8       | 6  | 82 M                | 6,0                              | 3.00D x 8   | 141   | 470   | 240  |
| V54    | 5.00 - 8       | 8  | 86 M                | 7,0                              | 3.00D - 8   | 141   | 470   | 240  |
| V54    | 5.00 - 8       | 10 | 89 M                | 8,5                              | 3.50D - 8   | 146   | 470   | 240  |
| V54    | 6.00 - 9       | 6  | 85 M                | 4,3                              | 4.00E x 9   | 166   | 553   | 241  |
| V54    | 6.00 - 9       | 10 | 95 M                | 7,0                              | 4.00E - 9   | 166   | 553   | 241  |
| V54    | 6.00 - 9       | 12 | 99 M                | 8,3                              | 4.00E - 9   | 166   | 553   | 241  |
| V71    | 16.5x 6.50 - 8 | 4  | 69 M                | 3,0                              | 5.50A x 8   | 173   | 437   | 241  |
| V71    | 16.5x 6.50 - 8 | 6  | 74 M                | 4,0                              | 5.50A x 8   | 173   | 437   | 241  |
| V90    | 4.00 - 8       | 6  | 70 M                | 4,3                              | 2.50A x 8   | 113   | 421   | 241  |

For the explanation of the symbols and abbreviations, see the inside of the last page.

## 3.50 - 8 4 PR / 46 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692081781 | Nominal tyre pressure     | 2,5 bar       |
| Tyre construction     | Diagonaal     | Section width             | 99 mm         |
| Recommended rim width | 2.50A x 8     | Overall diameter          | 389 mm        |
|                       |               | Load capacity at 130 km/h | 170 kg        |
|                       |               | EAN Tube                  | 8714692285257 |

# SMALL TYRES FAST TRAILER

## 4.00 - 8 4 PR / 63 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692081743 | Nominal tyre pressure     | 3,5 bar       |
| Tyre construction     | Diagonaal     | Section width             | 114 mm        |
| Recommended rim width | 2.50A x 8     | Overall diameter          | 422 mm        |
| Permitted rim width   | 3.00D x 8     | Load capacity at 130 km/h | 272 kg        |
|                       |               | EAN Tube                  | 8714692285264 |

## 4.00 - 8 6 PR / 70 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692081934 | Nominal tyre pressure     | 4,3 bar       |
| Tyre construction     | Diagonaal     | Section width             | 114 mm        |
| Recommended rim width | 2.50A x 8     | Overall diameter          | 422 mm        |
| Permitted rim width   | 3.00D x 8     | Load capacity at 130 km/h | 335 kg        |
|                       |               | EAN Tube                  | 8714692285264 |

## 5.00 - 8 4 PR / 71 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082061 | Nominal tyre pressure     | 3,5 bar       |
| Tyre construction     | Diagonaal     | Section width             | 145 mm        |
| Recommended rim width | 3.00D x 8     | Overall diameter          | 478 mm        |
|                       |               | Load capacity at 130 km/h | 345 kg        |
|                       |               | EAN Tube                  | 8714692285288 |

## 5.00 - 8 6 PR / 78 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082078 | Nominal tyre pressure     | 5,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 145 mm        |
| Recommended rim width | 3.00D x 8     | Overall diameter          | 478 mm        |
|                       |               | Load capacity at 130 km/h | 425 kg        |
|                       |               | EAN Tube                  | 8714692285295 |

## 5.00 - 10 4 PR / 74 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082276 | Nominal tyre pressure     | 3,5 bar       |
| Tyre construction     | Diagonaal     | Section width             | 146 mm        |
| Recommended rim width | 3.50B x 10    | Overall diameter          | 525 mm        |
|                       |               | Load capacity at 130 km/h | 375 kg        |
|                       |               | EAN Tube                  | 8714692285349 |

## 5.00 - 10 6 PR / 80 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082283 | Nominal tyre pressure     | 4,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 146 mm        |
| Recommended rim width | 3.50B x 10    | Overall diameter          | 525 mm        |
|                       |               | Load capacity at 130 km/h | 450 kg        |
|                       |               | EAN Tube                  | 8714692285349 |

# SMALL TYRES FAST TRAILER

## 5.00 - 10 8 PR / 84 M TL V47

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082337 | Nominal tyre pressure     | 5,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 146 mm        |
| Recommended rim width | 3.50B x 10    | Overall diameter          | 525 mm        |
|                       |               | Load capacity at 130 km/h | 500 kg        |
|                       |               | EAN Tube                  | 8714692285349 |

## 18.5x8.5 - 8 6 PR / 78 M TL V48

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082405 | Nominal tyre pressure     | 3,6 bar       |
| Tyre construction     | Diagonaal     | Section width             | 220 mm        |
| Recommended rim width | 7.00 x 8      | Overall diameter          | 475 mm        |
|                       |               | Load capacity at 130 km/h | 425 kg        |
|                       |               | EAN Tube                  | 8714692285318 |

## 18x8.0 - 10 8 PR / 98 M TL V48

|                       |               |                           |         |
|-----------------------|---------------|---------------------------|---------|
| EAN                   | 8714692082399 | Nominal tyre pressure     | 6,0 bar |
| Tyre construction     | Diagonaal     | Section width             | 188 mm  |
| Recommended rim width | 6.00 x 10     | Overall diameter          | 462 mm  |
|                       |               | Load capacity at 130 km/h | 750 kg  |

## 20.5x8.0 - 10 6 PR / 84 M TL V48

|                       |               |                           |         |
|-----------------------|---------------|---------------------------|---------|
| EAN                   | 8714692082382 | Nominal tyre pressure     | 3,4 bar |
| Tyre construction     | Diagonaal     | Section width             | 205 mm  |
| Recommended rim width | 6.00 x 10     | Overall diameter          | 524 mm  |
|                       |               | Load capacity at 130 km/h | 500 kg  |

## 20.5x8.0 - 10 10 PR / 96 M TL V48

|                       |               |                           |         |
|-----------------------|---------------|---------------------------|---------|
| EAN                   | 8714692082375 | Nominal tyre pressure     | 6,2 bar |
| Tyre construction     | Diagonaal     | Section width             | 205 mm  |
| Recommended rim width | 6.00 x 10     | Overall diameter          | 524 mm  |
|                       |               | Load capacity at 130 km/h | 710 kg  |

## 4.80 - 8 6 PR / 71 M TL V49

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082429 | Nominal tyre pressure     | 6,3 bar       |
| Tyre construction     | Diagonaal     | Section width             | 125 mm        |
| Recommended rim width | 3.75 x 8      | Overall diameter          | 429 mm        |
| Permitted rim width   | 3.00D x 8     | Load capacity at 130 km/h | 345 kg        |
|                       |               | EAN Tube                  | 8714692285271 |



# SMALL TYRES FAST TRAILER

## 5.70 - 8 6 PR / 77 M TL V49

|                       |                     |                           |         |
|-----------------------|---------------------|---------------------------|---------|
| EAN                   | 8714692082412       | Nominal tyre pressure     | 5,2 bar |
| Tyre construction     | Diagonaal           | Section width             | 156 mm  |
| Recommended rim width | 4.50 x 8            | Overall diameter          | 470 mm  |
| Permitted rim width   | 3.75 x 8, 3.50D x 8 | Load capacity at 130 km/h | 415 kg  |

## 4.00 - 8 6 PR / 71 M TL V54

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692081941 | Nominal tyre pressure     | 4,3 bar       |
| Tyre construction     | Diagonaal     | Section width             | 111 mm        |
| Recommended rim width | 3.00D x 8     | Overall diameter          | 423 mm        |
| Permitted rim width   | 2.50A x 8     | Load capacity at 130 km/h | 345 kg        |
|                       |               | EAN Tube                  | 8714692285264 |

## 4.00 - 8 8 PR / 75 M TT V54

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692081972 | Nominal tyre pressure     | 6,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 111 mm        |
| Recommended rim width | 3.00D - 8     | Overall diameter          | 423 mm        |
| Permitted rim width   | 2.50A x 8     | Load capacity at 130 km/h | 387 kg        |
|                       |               | EAN Tube                  | 8714692285271 |

## 5.00 - 8 6 PR / 82 M TL V54

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082016 | Nominal tyre pressure     | 6,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 141 mm        |
| Recommended rim width | 3.00D x 8     | Overall diameter          | 470 mm        |
|                       |               | Load capacity at 130 km/h | 475 kg        |
|                       |               | EAN Tube                  | 8714692285295 |

## 5.00 - 8 8 PR / 86 M TT V54

|                       |                      |                           |               |
|-----------------------|----------------------|---------------------------|---------------|
| EAN                   | 8714692082023        | Nominal tyre pressure     | 7,0 bar       |
| Tyre construction     | Diagonaal            | Section width             | 141 mm        |
| Recommended rim width | 3.00D - 8            | Overall diameter          | 470 mm        |
| Permitted rim width   | 3.00D x 8, 3.50D - 8 | Load capacity at 130 km/h | 530 kg        |
|                       |                      | EAN Tube                  | 8714692285295 |

## 5.00 - 8 10 PR / 89 M TT V54

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082030 | Nominal tyre pressure     | 8,5 bar       |
| Tyre construction     | Diagonaal     | Section width             | 146 mm        |
| Recommended rim width | 3.50D - 8     | Overall diameter          | 470 mm        |
|                       |               | Load capacity at 130 km/h | 580 kg        |
|                       |               | EAN Tube                  | 8714692285295 |



# SMALL TYRES FAST TRAILER

## 6.00 - 9 6 PR / 85 M TT V54

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082207 | Nominal tyre pressure     | 4,3 bar       |
| Tyre construction     | Diagonaal     | Section width             | 166 mm        |
| Recommended rim width | 4.00E x 9     | Overall diameter          | 553 mm        |
| Permitted rim width   | 4.00E - 9     | Load capacity at 130 km/h | 515 kg        |
|                       |               | EAN Tube                  | 8714692285325 |

## 6.00 - 9 10 PR / 95 M TT V54

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082214 | Nominal tyre pressure     | 7,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 166 mm        |
| Recommended rim width | 4.00E - 9     | Overall diameter          | 553 mm        |
|                       |               | Load capacity at 130 km/h | 690 kg        |
|                       |               | EAN Tube                  | 8714692285332 |

## 6.00 - 9 12 PR / 99 M TT V54

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082221 | Nominal tyre pressure     | 8,3 bar       |
| Tyre construction     | Diagonaal     | Section width             | 166 mm        |
| Recommended rim width | 4.00E - 9     | Overall diameter          | 553 mm        |
|                       |               | Load capacity at 130 km/h | 775 kg        |
|                       |               | EAN Tube                  | 8714692285332 |

## 16.5x6.5 - 8 4 PR / 69 M TL V71

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082290 | Nominal tyre pressure     | 3,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 173 mm        |
| Recommended rim width | 5.50A x 8     | Overall diameter          | 437 mm        |
|                       |               | Load capacity at 130 km/h | 325 kg        |
|                       |               | EAN Tube                  | 8714692285301 |

## 16.5x6.5 - 8 6 PR / 74 M TL V71

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692082092 | Nominal tyre pressure     | 4,0 bar       |
| Tyre construction     | Diagonaal     | Section width             | 173 mm        |
| Recommended rim width | 5.50A x 8     | Overall diameter          | 437 mm        |
|                       |               | Load capacity at 130 km/h | 375 kg        |
|                       |               | EAN Tube                  | 8714692285301 |

## 4.00 - 8 6 PR / 70 M TL V90

|                       |               |                           |               |
|-----------------------|---------------|---------------------------|---------------|
| EAN                   | 8714692081866 | Nominal tyre pressure     | 4,3 bar       |
| Tyre construction     | Diagonaal     | Section width             | 113 mm        |
| Recommended rim width | 2.50A x 8     | Overall diameter          | 421 mm        |
| Permitted rim width   | 3.00D x 8     | Load capacity at 130 km/h | 335 kg        |
|                       |               | EAN Tube                  | 8714692285264 |





# TECHNICAL INFORMATION AND TUBES

---

| TECHNICAL INFORMATION AND TUBES                                    | Pag. |
|--|------|
| General texts for the graphs and tables                            | 243  |
| Service description  | 243  |
| Instructions for use of load capacity graphs                       | 244  |
| Tubes  | 246  |
| Valves   | 247  |
| Rim and wheel discs  | 248  |
| Recommendations to extend the life-span                            | 250  |
| Determining gear ratio, rolling circumference and front wheel lead | 252  |
| Fitting instructions   | 255  |
| Weight transfer  | 256  |
| Names  | 256  |

## GENERAL TEXTS FOR THE GRAPHS AND TABLES

1. It is recommended not to exceed the maximum tyre pressures shown in the tables and graphs.
2. The dimensions indicated, which apply to a nominal tyre pressure, may vary in practice under the influence of actual tyre pressure and conditions of use.
3. When mounting tubeless tractor tyres, we recommend a TR618A valve.
4. Inner tubes for implement tyres are fitted with TR15 valve, with the exception of 560/60-22.5, 600/55-22.5 and 710/45-22.5. The tubes have a TR218A valve.
5. These specifications may be subject to change without notice.
6. TL = Tubeless. TT = Tube type.
7. 100 kPa = 1.0 bar.  
100 kPa = 14.50 PSI.
8. SRI = The Speed Radius Index (SRI) is by convention a parameter used exclusively for the calculation of the theoretical speed of tractors during European Union homologation procedures and for interchangeability of different tyre sizes

## SERVICE DESCRIPTION

LI = (Load index) \*

| Li | Kg  | Li | Kg  | Li  | Kg   | Li  | Kg   | Li  | Kg   | Li  | Kg   | Li  | Kg    |
|----|-----|----|-----|-----|------|-----|------|-----|------|-----|------|-----|-------|
| 45 | 165 | 68 | 315 | 91  | 615  | 114 | 1180 | 137 | 2300 | 160 | 4500 | 183 | 8750  |
| 46 | 170 | 69 | 325 | 92  | 630  | 115 | 1215 | 138 | 2360 | 161 | 4625 | 184 | 9000  |
| 47 | 175 | 70 | 335 | 93  | 650  | 116 | 1250 | 139 | 2430 | 162 | 4750 | 185 | 9250  |
| 48 | 180 | 71 | 345 | 94  | 670  | 117 | 1285 | 140 | 2500 | 163 | 4875 | 186 | 9500  |
| 49 | 185 | 72 | 355 | 95  | 690  | 118 | 1320 | 141 | 2575 | 164 | 5000 | 187 | 9750  |
| 50 | 190 | 73 | 365 | 96  | 710  | 119 | 1360 | 142 | 2650 | 165 | 5150 | 188 | 10000 |
| 51 | 195 | 74 | 375 | 97  | 730  | 120 | 1400 | 143 | 2725 | 166 | 5300 | 189 | 10300 |
| 52 | 200 | 75 | 387 | 98  | 750  | 121 | 1450 | 144 | 2800 | 167 | 5450 | 190 | 10600 |
| 53 | 206 | 76 | 400 | 99  | 775  | 122 | 1500 | 145 | 2900 | 168 | 5600 | 191 | 10900 |
| 54 | 212 | 77 | 412 | 100 | 800  | 123 | 1550 | 146 | 3000 | 169 | 5800 | 192 | 11200 |
| 55 | 218 | 78 | 425 | 101 | 825  | 124 | 1600 | 147 | 3075 | 170 | 6000 | 193 | 11500 |
| 56 | 224 | 79 | 437 | 102 | 850  | 125 | 1650 | 148 | 3150 | 171 | 6150 | 194 | 11800 |
| 57 | 230 | 80 | 450 | 103 | 875  | 126 | 1700 | 149 | 3250 | 172 | 6300 | 195 | 12150 |
| 58 | 236 | 81 | 462 | 104 | 900  | 127 | 1750 | 150 | 3350 | 173 | 6500 | 196 | 12500 |
| 59 | 243 | 82 | 475 | 105 | 925  | 128 | 1800 | 151 | 3450 | 174 | 6700 | 197 | 12850 |
| 60 | 250 | 83 | 487 | 106 | 950  | 129 | 1850 | 152 | 3550 | 175 | 6900 | 198 | 13200 |
| 61 | 257 | 84 | 500 | 107 | 975  | 130 | 1900 | 153 | 3650 | 176 | 7100 | 199 | 13600 |
| 62 | 265 | 85 | 515 | 108 | 1000 | 131 | 1950 | 154 | 3750 | 177 | 7300 |     |       |
| 63 | 272 | 86 | 530 | 109 | 1030 | 132 | 2000 | 155 | 3875 | 178 | 7500 |     |       |
| 64 | 280 | 87 | 545 | 110 | 1060 | 133 | 2060 | 156 | 4000 | 179 | 7750 |     |       |
| 65 | 290 | 88 | 560 | 111 | 1090 | 134 | 2120 | 157 | 4125 | 180 | 8000 |     |       |
| 66 | 300 | 89 | 580 | 112 | 1120 | 135 | 2180 | 158 | 4250 | 181 | 8250 |     |       |
| 67 | 307 | 90 | 600 | 113 | 1150 | 136 | 2240 | 159 | 4375 | 182 | 8500 |     |       |

\* Applies to maximum speed as indicated by the Speed Symbol.



# TECHNICAL INFORMATION AND TUBES

## Speed Symbols

| Category | Max. speed in km/h | Category | Max. speed in km/h |
|----------|--------------------|----------|--------------------|
| A1       | 5                  | C        | 60                 |
| A2       | 10                 | D        | 65                 |
| A3       | 15                 | E        | 70                 |
| A4       | 20                 | F        | 80                 |
| A5       | 25                 | G        | 90                 |
| A6       | 30                 | H        | 100                |
| A7       | 35                 | I        | 110                |
| A8       | 40                 | J        | 120                |
| B        | 50                 | M        | 130                |

## INSTRUCTIONS FOR USE OF LOAD CAPACITY GRAPHS

Tyres with the speed symbols A6, A8 or D can be used at higher speeds if the load is reduced. The load capacity charts indicate the maximum speed with the corresponding load capacity. Tractor tyres with speed symbol A8/B are subject to a maximum permitted speed of 50 km/h.

### IMPLEMENT TYRES

#### Low Load Variation (LLV) and High Load Variation (HLV)

In the case of cross-ply implement tyres a distinction should be made between applications in which the load per tyre fluctuates greatly and applications in which the load per tyre is more or less constant. If the load varies by a factor of 2 or more between the laden and non-laden state, we speak of High Load Variation. Where the differences are smaller, we speak of Low Load Variation. For HLV applications, the load capacity per tyre may be increased by 20%, while the tyre pressure must be increased. This distinction is indicated in the graphs. Examples of HLV applications are selfloading trailers and muck spreaders. Examples of LLV applications are tillage machines and towed mowing machines.

### Driven/non-driven wheels

If implement tyres are driven, the load capacity is 70% of the value stated in the graph concerned or 12 load index points less than for towed applications. This does not apply to the Flotation Trac, Flotation Pro and the Endurion Trailer, which have the same load capacity whether used in driven or non-driven applications.

### Tandem axles

Where implement tyres are fitted on rigid tandem axles, extra lateral forces occur during sharp turns on the road. For that reason we advise maintaining a reserve of 20% for the necessary load capacity of tyres on rigid tandem axles.

### Ply rating and service description

Cross-ply implement tyres are given a ply rating or load index/speed symbol (service description). The load index for diagonal implement tyres relates to the load capacity under LLV conditions.

## TRACTOR TYRES

### Double fitting

If driven wheels are fitted as twinned wheels, the load capacity per tyre is equal to that of one in single fitting, reduced by 12%.



### Agricultural work with a high drive torque

If during work, such as ploughing, a high drive torque is required of the tyres, the load capacity with the same tyre pressure will be reduced. The H.T. (High Traction) line for these applications applies to all usual field speeds.

### Transport work

For intensive road transport at more than 30 km/h, the tyre pressure of radial tractor tyres should be increased by 0,4 bar.

A distinction is made between the load capacities with drive and non-driven (free) applications. The symbols for this are:

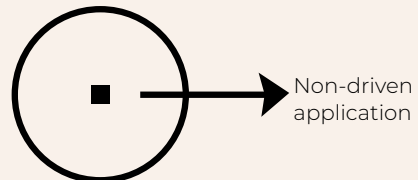



# TECHNICAL INFORMATION AND TUBES

## TUBES

### Drive wheels

| Tube size  | Valve  |
|--|--------|
| 11.2-24<br>12.4-24, 320/85-24<br>13.6-24, 340/85-24, 380/70-24, 440/65-24<br>14.9-24, 380/85-24, 420/70-24, 480/65-24                                  | TR 218 |
| 11.2-28<br>12.4-28, 320/85-28<br>13.6-28, 340/85-28, 380/70-28<br>14.9-28, 380/85-28, 420/70-28, 480/65-28<br>16.9-28, 420/85-28, 480/70-28, 540/65-28 | TR 218 |
| 16.9-30, 420/85-30, 480/70-30, 540/65-30   | TR 218 |
| 12.4-32  | TR 218 |
| 16.9-34, 420/85-34<br>18.4-34, 460/85-34, 520/70-34, 600/65-34   | TR 218 |
| 12.4-36<br>13.6-36   | TR 218 |
| 13.6-38<br>16.9-38, 420/85-38, 480/70-38, 540/65-38<br>18.4-38, 460/85-38, 520/70-38, 600/65-38<br>20.8-38, 520/85-38, 580/70-38, 650/65-38            | TR 218 |

### Agricultural and horticultural machinery

| Tube size   | Valve  |
|---|--|
| 200x50, 2.00-4<br>260x85 / 3.00-4<br>4.00-4, 4.10/3.50-4  | TR 87  |
| 3.50-6, 4.10/3.50-6<br>15x6.00-6, 160/65-6  | TR 13 / TR 87<br>TR 13   |
| 2.25-8<br>3.00-8, 3.50-8<br>4.00-8, 4.80-8<br>5.00-8<br>170/60-8, 16.5x6.5-8<br>18x8.50-8, 210/60-8 | V1.04.01*<br>TR 13<br>TR 13 / TR 87<br>TR 13 / TR 87<br>TR 13<br>TR 13 |
| 6.00-9  | TR 15 / TR 87  |
| 5.00-10   | TR 13  |
| 4.00-12, 3.50-12  | TR 13  |
| 200/60-14.5   | TR 15  |

\* ETRTO No.


### Implement and non-driven steering wheels

| Tube size  | Valve  |
|--|--|
| 7.00-12<br>10.0/80-12  | TR 15  |
| 10.0/75-15.3, 260/70-15.3<br>11.5/80-15.3, 300/80-15.3<br>12.5/80-15.3   | TR 15  |
| 400/60-15.5  | TR 15  |
| 4.50-16, 5.00-16<br>5.50-16, 6.00-16<br>6.50-16, 7.00-16<br>7.50-16<br>9.00-16<br>10.00-16<br>11.00-16<br>13.0/75-16 | TR 15  |
| 13.5/75-430.9  | TR 15  |
| 15.0/55-17, 380/55-17<br>19.0/45-17, 480/45-17<br>500/50-17  | TR 15  |
| 7.50-18<br>12.5/80-18<br>15.0/70-18  | TR 15  |
| 6.00-19  | TR 15  |
| 7.50-20<br>9.00-20<br>10.00-20<br>11.00-20   | TR 15<br>V3-06-05*<br>V3-06-05*<br>V3-06-05* |
| 560/60-22.5<br>600/55-22.5<br>710/45-22.5  | TR 218                                       |


# VALVES

| Description                              | TRA No.  | DIN No.    | ETRTO no. | Dimensions (mm) |       |          | Valve hole $\phi$ | Bend angle | MTB bar |
|--|----------|------------|-----------|-----------------|-------|----------|-------------------|------------|---------|
|  |          |            |           | A               | B     | $\phi$ D |                   |            |         |
| Tube valve (1)                           | TR 13    | 38 G 11.5  | V2-01-1   | 38              | 57    | 11.6     | 11.3              | 0°         | 5,00    |
|  | TR 15    | 38 G 16    | V2-01-2   | 38              | 57    | 16.5     | 15.7              | 0°         | 5,00    |
|  | TR 150   | 93 G 16    | V3-10-1   | 93              | 57    | 15.7     | 15.7              | 0°         | 7,00    |
| Tubeless valve (2)                       | TR 412   | 43 GS 11.5 | V2-03-6   | 33              | 19.5  | 15       | 11.3              | 0°         | 4,50    |
|  | TR 413   |            | V2-03-1   | 42.5            | 19.5  | 15       | 11.3              | 0°         | 4,75    |
|  | TR 415   |            | V2-03-3   | 42.5            | 24    | 19.2     | 15.7              | 0°         | 4,50    |
| Liquid filling valve (3)                 | TR 218 A | 47 CW      | V4-03-01  | 47.5            | 63.5* | 16.2     | 15.7              | 0°         | 10,50   |
| Metalen ventiel (4)                      | TR 87    | 33 G 90    | V1-08-1   | 17              | 33    | 10       | 10.2              | 90°        | 10,50   |
| Metalen tubeless ventiel (5)             | TR 416 S | 50 MSW     | V2-05-1   | 36.5            | 17    | 8        | 11.3              | 0°         | 14,00   |
|  | TR 416   |            | V2-05-2   | 36.5            | 17    | 8        | 15.7              | 0°         | 14,00   |
|  | TR 618 A |            | V5-01-1   | 51              | 22.5  | 15.7     | 15.7              | 0°         | 14,00   |
| Triple bend screw-on universal valve (6) |          | V3-06-5    |           |                 |       |          |                   |            |         |


MTB = Maximum permissible tyre pressure




1. Tube valve




2. Tubeless valve




3. Liquid filling



4. Metal valve



5. Metal tubeless

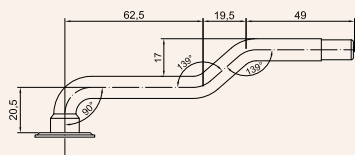

6. Triple bend screw-on universal valve




# TECHNICAL INFORMATION AND TUBES

## RIM AND WHEEL DISCS

A wheel is made up of a rim and a wheel disc that are fixed to or detachable from each other and must exactly match. The rim size is of crucial importance to the tyre/rim combination.

### Size designations of rims

Two wheels are shown here with the associated meanings of the size indications.




| Single rim   | Multi-piece rim  |
|--|--|
| 4.00 E x 16  | 13 - 508   |
| This means:<br>4.00 = rim width code (inches)<br>E = rim flange height<br>x = one piece rim<br>16 = rim diameter code (inches) | This means:<br>13 = rim width code (inches)<br>- = multi-piece rim<br>508 = rim diameter code (mm) |

### Rim choice

When using tubeless tyres, tubeless rims should also be used. A protective flap must always be used when combining inner tubes with multi-piece rims. This prevents damage to the inner tube.

### The most important size indications of wheel discs are the following:

- G = diameter of the central hole
- S = pitch circle diameter of the stud holes and number of stud holes
- N = diameter cleat circle and number of cleats
- D = diameter stud hole and stud hole shape
- E = extra stud holes in case of double fitting
- B = outside diameter disc.



### Warning

The diameter of different rim sizes may look very similar, but they're not equal as you can see in the table.


| "Small" overall diameter |                          | "Large" overall diameter |                          |
|--------------------------|--------------------------|--------------------------|--------------------------|
| rim width code           | rim diameter code D (mm) | rim width code           | rim diameter code D (mm) |
| 430.9 mm                 | 430.9                    | 17                       | 436.6                    |
| 15                       | 380.2                    | 15.3                     | 388.3                    |
| 508 mm                   | 508                      | 20                       | 512.8                    |



### Always use the rim stipulated

If you use a rim which is too narrow, the tread will be convex and, as is the case where tyre pressure is too high, there will be excessive wear of the centre of the tread.

The fitting of a tyre to the wrong rim can lead to highly dangerous consequences! Fitting a "large" tyre (e.g. 10.0/75-15.3) on a smaller rim (i.e. rim size code 15) is dangerous. The tyre is loose-fitting and in extreme conditions can "blow-off" the ring. Rimchafing can be the consequence. Fitting a "smaller" tyre on a rim which is too large in overall diameter can also be dangerous! As the bead diameter of the tyre is smaller than the base rimflange diameter, by inflating the tyre, the chances of the bead breaking and the tyre exploding are high.

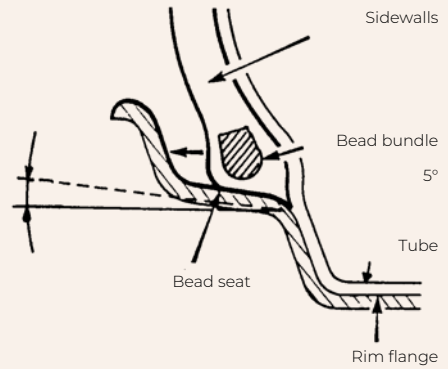



## RECOMMENDATIONS TO EXTEND THE LIFE-SPAN

### Tyre pressure

Correct inflation pressure is important for performance, durability, comfort and traction. It is of crucial importance for the life expectancy of your tyres that you adjust the tyre pressure according to usage and check it regularly. To ensure accurate measurement, the pressure gauge must be calibrated once a year. Measurement of tyre inflation pressure must be done when the tyres are cold. If the pressure in a warm tyre is correct, then it would be too low when the tyre has cooled.

### Inflation pressure too low

Under-inflation can reduce the life-span due to:

- damaged carcass cord plies, which can render the tyre unusable;
- increased wear;
- carcass damage close to the bead.

### Road use and operation in the field

These two kinds of use require different tyre inflation pressures. Allowance has been made for this in the tyre pressure graphs. Radial and cross-ply tyres must not be used on the same axle, as this can lead to unstable handling.

### Visual check

Tyres must be checked regularly for damage. Incision damage can be particularly harmful to the cord tissue layers of the tread.

### Oil and grease

To avoid damage to the rubber, tyres should not come into contact with oil and grease.

### Frost protection

To protect against frost when water ballasting, sufficient calcium chloride should be added. Please consult your supplier of calcium chloride about the right ratio.

### Slippage of the tyre

The following can increase the likelihood of slippage of the tyre on the rim:

- tyre pressure too low;
- faulty fitting of the tyre bead on the rim;
- over use of lubricant when fitting tyre;
- wrong rim size.



The minimum tyre pressure for high-traction work (e.g. ploughing) is 80 kPa when using an inner tube. A lower pressure increases the chances of the tyre turning on the rim and tearing off the valve.

Direction of steering wheels on four wheel drive tractors

When fitting or changing tyres ensure that the directional arrow on the sidewall is pointing forward.

It is possible to fit the front tyres in such a way that the tread turns against the direction of rotation on four wheel drive tractors that are primarily used for transport activities. This will extend the life-span of the tyres. Such fitting is not recommended for field activities as it radically reduces the traction and self-cleaning properties.

### Transport instructions

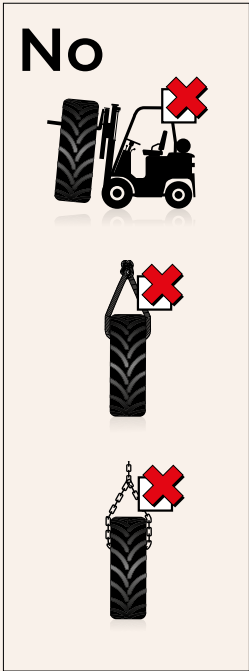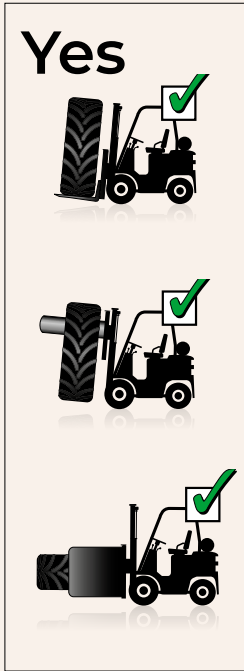



# TECHNICAL INFORMATION AND TUBES


## DETERMINING GEAR RATIO, ROLLING CIRCUMFERENCE AND FRONT WHEEL LEAD

There is a close relationship between the measurements of the front and rear tyres on four-wheel drive tractors. To get the most from the four wheel drive, the ground speed of the front tyres must be greater than that of the rear tyres - the so-called front wheel lead. With tractors, it is normally stated which tyres can be fitted as standard. A range of sizes is often possible with a certain tractor type, within the borders of a correct front wheel lead.

To optimally exploit the four wheel drive of a tractor, the value of the front wheel lead should be between +1% and +5% (ground speed front tyres > ground speed rear tyres). The permitted front wheel lead value is between 0% and +6%. A front wheel lead below 0% or above +6% can have a negative influence on the tractor's performance and steering (especially on corners), cause excessive wear of the front and rear tyres and premature wear of the gears.

The relationship between the revolutions of the front and rear axles on a mechanical four wheel drive is fixed. This relationship is the gear ratio, which is usually between 1.20 and 1.50, depending on the brand and type of tractor.

The exact mechanical gear ratio is given in the manual of every tractor. The following method can also be used to determine the figure. In addition, there is an explanation of how to determine the rolling circumference of a tyre and the aforementioned front wheel lead.

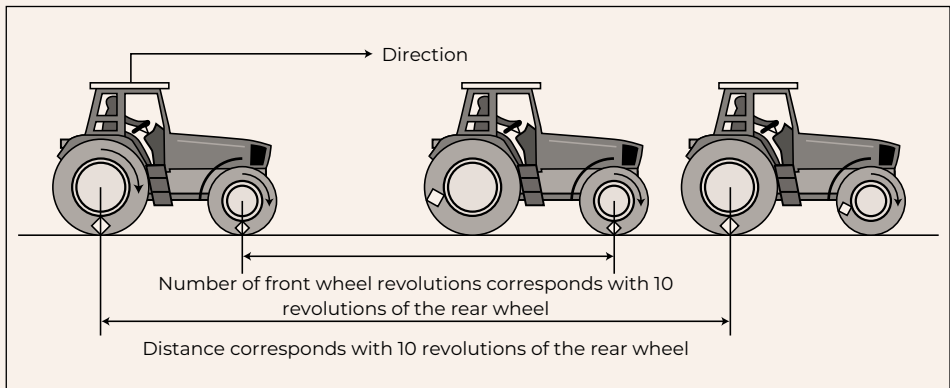

### Determining the rolling circumference of a tyre

Take the measurements on a smooth and hard surface as follows:

1. Switch off the 4WD (the front and rear wheels have to turn independently).
2. Mark the sidewall of a front and rear tyre in the centre of the contact area between tyre and surface.
3. Mark the surface at the point where the centre of the contact area of both the front and rear tyres meets that surface (i.e. the point of the marking on the tyres).
4. Drive the tractor in a straight line until the front wheel has made exactly 10 revolutions and mark the surface where the middle of the contact area of the tyre meets the ground (i.e. the point where the marking on the front tyre is after precisely 10 revolutions).
5. Repeat the process for the rear wheel (i.e. make and mark 10 revolutions).
6. Measure the distance between the markings of the start and finishing point of 10 revolutions of the front and rear wheels.
7. Calculate the rolling circumference of the front and rear tyres as follows:

Rolling circumference front (in mm)

= distance covered by front wheel / number of revolutions


Rolling circumference rear (in mm) = distance covered by rear wheel / number of revolutions

### Determining the front wheel lead

The following conditions are required to measure the front wheel lead: The tractor must be fitted with the standard front ballast and the tyres set to a nominal pressure. At least 60 metres of clear road is necessary.

To determine the front wheel lead:

1. Switch off the 4WD.
2. Mark the sidewall of a front and rear tyre at the contact point between tyre and ground.
3. Drive the tractor for a distance of exactly 10 revolutions of the rear wheel and accurately count the number of front wheel revolutions at the same time (i.e. including the part of the last, incomplete revolution).
4. Repeat the measuring with the 4WD switched on.
5. Calculate the front wheel lead by dividing the number of front wheel revolutions with the 4WD switched on by the number when switched off.

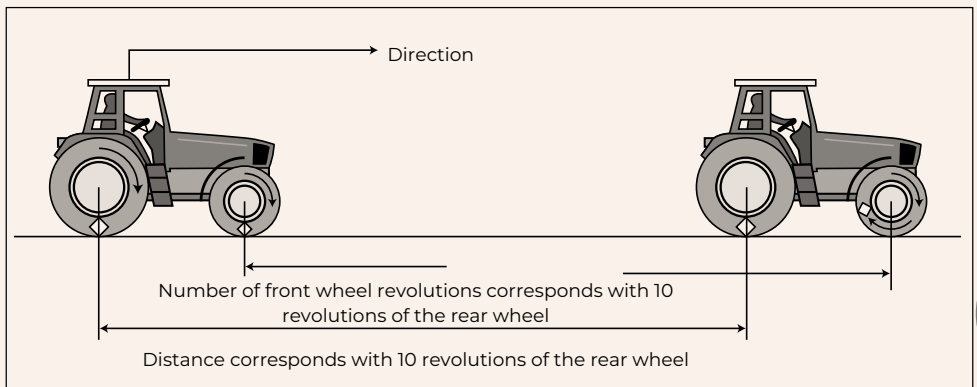



# TECHNICAL INFORMATION AND TUBES

---

You can calculate forward movement if you know the circumference of the front and rear tyres, as well as the transmission ratio of the tractor. Use the formula given below:

$$\% \text{ front wheel lead} = \frac{\text{Front tyre rolling circumference} \times \text{gear ratio}}{\text{Rear tyre rolling circumference}} - 1 \times 100\%$$

## Determining the gear ratio

### To determine the gear ratio:

1. Switch on the 4WD.
2. Mark the sidewall of a front and rear tyre at the contact point between tyre and ground.
3. Drive the tractor for a distance of exactly 10 revolutions of the rear wheel and accurately count the number of front wheel revolutions at the same time (i.e. including the part of the last, incomplete revolution).
4. Calculate the gear ratio by dividing the number of front wheel revolutions by the number of rear wheel revolutions, e.g.:

$$\text{Gear ratio} = \frac{\text{Number of front wheel revolutions}}{\text{Number of rear wheel revolutions}}$$

## FITTING INSTRUCTIONS

Pay attention to the following safety regulations and legal requirements when fitting agricultural tyres:

1. Only use the recommended rims.
2. Check that the rims are in good condition (rust-free, no bent rim flange, etc.).
3. Put lubricant on the tyre beads and rim.
4. Always use new Vredestein inner tubes of corresponding size when fitting new tube type tyres.
5. Secure the wheel during inflation, preferably in a proper safety cage.
6. Only use an air hose with a pressure gauge that is fitted at a sufficiently safe distance from the valve connection.
7. Never pump the tyres higher than 250 or 300 kPa when fitting, as indicated on the side of the tyre.
8. If the beads do not appear to be properly seated on the rim flange after fitting, do not try and correct this by inflating above 250 kPa. Deflate the tyre, re-centre the beads and reinflate.

**2,5 bar MAX**



9. The tyre pressure should match the prescribed values based upon the maximum load, maximum speed and working conditions. Use the Vredestein load capacity chart/tyre pressure table for reference.



# TECHNICAL INFORMATION AND TUBES

## WEIGHT TRANSFER

The weight distribution between the front and rear axles is crucial to how a tractor drives and steers. Attaching implements and/or trailers can alter the weight distribution. Proper weight distribution ensures optimal pulling power is provided by the driven wheels, which have maximum grip when they are used at full load with the appropriate tyre pressure.

Always make sure at least 20% of the total weight of the tractor continues to rest on the front axle in order to keep the tractor under control.


### Excessive loading causes:

- overloading of the tyres, resulting in more wear and possible carcass defects
- increased rolling resistance, resulting in reduced traction and extra fuel consumption
- ruts in the field
- higher soil compaction, resulting in damage to the soil and reduced yields.

### Insufficient loading causes:

- more slip, resulting in reduced traction power and more damage to the soil
- higher fuel consumption
- rapid tyre wear
- poor steering.

## NAMES

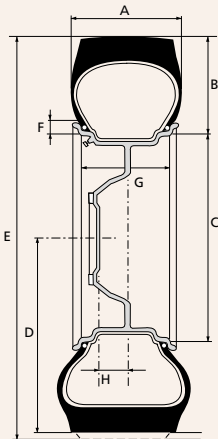

- A : Section width
- B : Section height
- C : Rim diameter
- D : Static loaded radius
- E : Overall diameter
- F : Rim bead height
- G : Rim width
- H : Offset





**520/85 R 42 155 A8/B TL**

|          |   |                                      |
|----------|---|--------------------------------------|
| 520      | = | Nominal section width (in mm)(in mm) |
| 85       | = | Aspect ratio in %                    |
| R        | = | Radial construction                  |
| 42       | = | Rim diameter code (in inches)        |
| 155 A8/B | = | Maximum 4125 kg at 40-50 km/h        |
| TL       | = | Tubeless                             |



**16.9-30 8 PR 137 A8 TT**

|        |   |                                  |
|--------|---|----------------------------------|
| 16.9   | = | Nominal section width(in inches) |
| -      | = | Diagonal construction            |
| 30     | = | Rim diameter code (in inches)    |
| 8PR    | = | Carcass strength                 |
| 137 A8 | = | Maximum 2300 kg at 40 km/h       |
| TT     | = | Tube type                        |



**10.00 - 16 8PR TT**

|       |   |                                   |
|-------|---|-----------------------------------|
| 10.00 | = | Nominal section width (in inches) |
| -     | = | Diagonal construction             |
| 16    | = | Rim diameter code (in inches)     |
| 8PR   | = | Aanduiding voor karkassterkte     |
| TT    | = | Tube type                         |



**710/50 R 26.5 170D TL**

|       |   |                               |
|-------|---|-------------------------------|
| 710   | = | Nominal section width (in mm) |
| 50    | = | Aspect ratio in %             |
| R     | = | Radial construction           |
| 26.5  | = | Rim diameter code (in inches) |
| 170 D | = | Maximum 6000 kg at 65 km/h    |
| TL    | = | Tubeless                      |



**13.5/75 - 430.9 14PR TL**

|       |   |                                   |
|-------|---|-----------------------------------|
| 13.5  | = | Nominal section width (in inches) |
| 75    | = | Aspect ratio in %                 |
| -     | = | Diagonal construction             |
| 430.9 | = | Rim diameter code (in mm)         |
| 14 PR | = | Carcass strength                  |
| TL    | = | Tubeless                          |



**18 x 8.50 - 8 6PR TL**

|      |   |                                   |
|------|---|-----------------------------------|
| 18   | = | Nominal tyre diameter (in inches) |
| 8.50 | = | Nominal section width (in inches) |
| -    | = | Diagonal construction             |
| 8    | = | Rim diameter code (in inches)     |
| 6PR  | = | Carcass strength                  |
| TL   | = | Tubeless                          |










# NOTES

## GENERAL REMARKS

|  |   |
|--|---|
|  | The dimensions indicated, which apply to a nominal tyre pressure, may vary in practice under the influence of actual tyre pressure and conditions of use. |
|  | These specifications may be subject to change without notice. No liability accepted for errors or misprints.  |
|  | It is recommended not to exceed the maximum tyre pressures shown in the tables.   |
|  | 1 bar = 100 kPa = 14,5 psi  |
|  | A6 = 30 km/h; A8 = 40 km/h; A8/B = 40/50 km/h; D = 65 km/h  |
|  | TL = Tubeless; TT = Tube Type   |
|  | "Tread depth (including tie bar)" means the tread depth on top of the tie bar, with the height of the tie bar added.                                      |
|  | <b>For radial tractor drive tyres applies:</b> For intensive transport activities at more than 30 km/h, the tyre pressure should be increased by 0,4 bar. |
|  | <b>For radial tractor drive tyres applies:</b> When working on slopes over 20%, the tyre pressure should be increased by 0,4 bar.                         |

## SYMBOLS AND ABBREVIATIONS

|   |   |
|---|---|
| SRI   | Speed Radius Index  |
| VF  | Very High Flexion   |
| NRO   | Narrow Rim Option. The NRO marking allows the use of a narrower rim width than normally permitted by ETRTO standards for either IF or VF tyres of the same size. When using NRO rim, the tyre pressure should be increased by 0,2 bar.  |
|  | Section width (mm), a tolerance of $\pm 2\%$ applies  |
|  | Overall diameter (mm), a tolerance of $\pm 2\%$ applies   |
|  | Static loaded radius (mm), a tolerance of $\pm 2\%$ applies   |
|  | Rolling circumference (mm), a tolerance of $\pm 2\%$ applies  |
|  | Rim width and contour   |
|  | Non-driven / trailed / free-rolling application   |
|  | Driven application  |
| 10C   | Cyclic field activities at low torque up to 10 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 1500 meter. For slopes of over 10% up to 20% increase the inflation pressure with 0,5 bar. For slopes over 20% only the basic load capacity applies. |
| 10Ci  | Cyclic activities at low torque up to 10 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 600 meter.   |
| 10H   | Field activities where high torque is required at maximum 10 km/h.  |
| 10L   | Activities where low torque is required at maximum 10 km/h.   |
| 15C   | Cyclic field activities at low torque up to 15 km/h where the maximum load per tyre fluctuates greatly and where the maximum load is carried not more than 1500 meter. For slopes of over 10% up to 20% increase the inflation pressure with 0,5 bar. For slopes over 20% only the basic load capacity applies. |
| #   | Consult Apollo Vredestein for this rim width.   |
| *   | Calculated value.   |
| **  | In case these tyres are driven, 70% of the load capacity in non-driven application applies.   |
| ***   | When fitted on free-rolling steering wheels of self propelled agricultural equipment, tyre load capacities are 80% of the loads for free-rolling applications.  |

**FOR THE REMARKS AND THE  
EXPLANATION OF ABBREVIATIONS,  
SEE OTHER SIDE OF THIS FLAP.**

# **VREDESTEIN AGRICULTURAL TYRES TECHNICAL DATA BOOK**

2022-2023

Apollo Tyres (UK) Sales Ltd. | 1 Beechwood | Cherry Hall Road  
Kettering Business Park | NN14 1UE Kettering | United Kingdom  
+44 (0)330 333 1294 | [customer.uk@apolloytyres.com](mailto:customer.uk@apolloytyres.com) | [www.vredestein.uk](http://www.vredestein.uk)

Apollo Tyres (Nordic) AB | Kontor: Flöjelbergsgatan 18 | 431 37 Mölndal | Sweden  
+47 81 50 30 27 | [customer.se@apolloytyres.com](mailto:customer.se@apolloytyres.com), [customer.dk@apolloytyres.com](mailto:customer.dk@apolloytyres.com)  
[www.vredestein.se](http://www.vredestein.se), [www.vredestein.dk](http://www.vredestein.dk)

Apollo Tyres (Polska) Sp. Z.o.o. | Ul. Prosta 32 | 00-838 Warsaw | Poland  
+48 22 886 81 00 | [customer.pl@apolloytyres.com](mailto:customer.pl@apolloytyres.com) | [www.vredestein.pl](http://www.vredestein.pl)

Apollo Tyres (Hungary) Sales Kft. | Alkotás út 39/c 1123 Budapest | Hungary  
+36 1 379 5433 / 379 5434 | [customer.hu@apolloytyres.com](mailto:customer.hu@apolloytyres.com) | [www.vredestein.hu](http://www.vredestein.hu)

Apollo Tyres (Europe) B.V. | Ir. E.L.C. Schiff sr. straat 370, 7547 RD Enschede | Netherlands  
+31 (0)53 488 8777 | [customer.nl@apolloytyres.com](mailto:customer.nl@apolloytyres.com) | [www.vredestein.nl](http://www.vredestein.nl)

For other Vredestein sales offices or importers see [www.vredestein.com](http://www.vredestein.com)

**VREDESTEIN**  
TYRES